



TECHNOMOTOR

Huizhou Techno Motor Co., Ltd.

惠州市特洛电机有限公司



Techno Motor



2023

PRODUCT CATALOG



Huizhou Techno Motor Co., Ltd. was established in 2011. It is a factory specializing in R&D, manufacturing and sales of DC brush motors, brushless motors, and gimbal motors. The factory has a complete ISO quality system, and the products have passed CE, ROHS and other certifications.

The company's main products are DC brush motors, brushless motors and gimbal motors. Our products are widely used in toys, household appliances, office equipment, medical equipment, remote control models, airplanes, electronic door locks, etc., as well as some industrial applications.

The factory technicians have been engaged in the micro-motor industry for more than 20 years, and have rich experience in R&D, manufacturing and customer service. The factory has a large number of automated production equipment and testing equipment. The factory brand Techno motor has been widely recognized by domestic and foreign customers, and its products are exported to Europe, Japan, South Korea, Australia and other countries.

惠州特洛电机有限公司成立于2011年。是一家专业研发、生产、销售直流有刷电机、无刷电机、云台电机的厂家。工厂拥有完整的ISO质量体系，产品已通过CE、ROHS等认证。

公司主要产品有直流电动机、无刷电机和云台电机。我们的产品广泛应用于玩具、家用电器、办公设备、医疗设备、遥控模型、飞机、电子门锁等，以及一些工业应用。

工厂技术人员从事微电机行业20多年，具有丰富的研发、制造、客户服务经验。工厂拥有大量自动化生产设备和检测设备。本厂品牌Techno电机得到了国内外客户的广泛认可，产品远销欧洲、日本、韩国、澳大利亚等国家。

Welcome to Techno Motor!



企业文化

理念: 以专业为基础,
以研发指导为方向。

价值: 尊重知识价值,
创造财富未来。

宗旨: 以诚信为本,
以质量求生存,
以服务求发展。

合作: 缔造机会,
共同发展。

Company Culture

Idea:
Base on profession,
Work with development.

Value:
Future created by wisdom.

Purpose:
Credibility foundation,
Service innovation.

Cooperation:
Opportunity creation,
Joint development.

■ Brush DC Motor / 直流有刷电机

Motor Number Information / 命名规则	02
TF-M10F DC Brush Motor	03
TF-M11F DC Brush Motor	04
TF-M20F DC Brush Motor	05
TF-N20F DC Brush Motor	06
TF-03 DC Brush Motor	07
TR-13F DC Brush Motor	08
TR-02F DC Brush Motor	09
TF-13F DC Brush Motor	10
TR-30FI DC Brush Motor	11
TR-50F DC Brushless Motor	12
TF-13 DC Brush Motor	13
TR-14 DC Brush Motor	14
TR-26 DC Brush Motor	15
TF-26 DC Brush Motor	16
TR-28 DC Brush Motor	17
TF-28 DC Brush Motor	18
TR-37 DC Brush Motor	19
TR-38 DC Brush Motor	20

■ Brushless DC Motor / 直流无刷电机

Motor Number Information / 命名规则	22
BD2830 & BD2836-R	23
BD2225-R & BD2812	24
BD2822-R & BD2826	25
BD2836 & BD3530	26
BD3536 & BD3542	27
BD3548 & BD3548-R	28
BE1102 & BE1404	29
BE2208 & BE2212	30
BE2217 & BE2808	31
BE2814 & BE2820	32
BE2826 & BE3506	33
BE3608 & BE4010	34
BE4108 & BE4215	35
BE4250 & BE5208	36
BA0703 & BA1104	37
BA1306 & BA1407	38
BA1804 & BA1806	39

BA1812 & BA2205	40
BA2206 & BA2207	41
BA2306 & BA6007	42
BA8108 & TM2318	43
TM2830 & TM3536	44
HB3536 & TM4250	45
TM8016 & TM8108	46
TM2807 & TM2810	47
TM2812 & TM3110	48
TM3112 & TM3115	49
TM3512 & TM3515	50
TM2627 & TM2840	51
TM4214	52

■ Gimbal Brushless Motor / 云台电机

Motor Number Information / 命名规则	54
TMO2208-70T & TMO2606-90T	55
TMO2608-70T & TMO2804-100T	56
TMO3506 & TMO4005-60T	57
TMO4014-75T & 4108-120T	58
TMO4114-100T & TMO4114-120T	59
TMO5012-150 & HHZ5208-75T	60
TMO6208-150T & TMO5208S	61
TMO5208B & TMO6208-150T	62
TMO6212-150T & TMO8008-120T	63
TMO8014-120T & TMO8018-90T	64
TMO8112-90T & TMO60-80T	65
TMO81-90T & TMO1008-150T	66

■ Fascia Gun Motor / 筋膜枪电机

Motor Number Information / 命名规则	68
TM3227-M & TM3227-HM	69
TM3227-K & TM3227-P	70
TM3230-P & TM3525	71
TM3825 & TM3925	72

■ Hair Clippers Motor / 电推剪内转子电机

Motor Number Information / 命名规则	74
TM2418 & TM2838	75
TM2418 & TM2838	76

直流有刷电机

BRUSH DC MOTOR



直流有刷电机是内含电刷装置的将直流电能转换成机械能(直流电动机)或将机械能转换成直流电能(直流发电机)的旋转电机。

Brushed DC motor is with brush system and converting DC electric energy into mechanical energy.

命名规则

Motor Number Information

特洛电机

TECHNO MOTOR

马达外形

FIGURE OF MOTOR

R: 圆形 Round

F: 扁形 Flat

U: 方形

转子极数

NUMBER OF ROTOR POLES

0:3极 Three Poles

5:5极 Five Poles

专用或特殊规格

SPECIAL SPECIFICATION LABEL

磁石类型

TYPE OF MAGNET

None: 普磁 Normal Magnetism

S: 强磁 Strong Magnetism

W: 稀土磁 Rare Earth Magnet

线圈匝数

COIL NUMBER OF WINDING

TF - 130SAC - 2270 / 38VN

电机长度代号

CODE OF MOTOR LENGTH

转子直径代号

CODE OF ROTOR DIAMETER

导线直径

DIAMETER OF WIRE

轴长

SHAFT LENGTH

电刷结构

CONFIGURATION OF BRUSH

None: 铜刷 Copper Brush

F: 贵金属刷 Precious Metal-Brush

K: 碳刷结构 Carbon-Canister

C: 普通碳刷 Ordinary Carbon-Brush

后盖或特殊说明

END COVER OF SPECIAL EXPLANATION

A: 尼龙后盖加轴承 Nylon Rear Cover With Bearings

H: 直端子 Straight Terminal

M: 铁盖 Iron End Cover

T: 内插式胶盖 Insert Type Rubber End Cover


P: 增磁环 Increasing Magnetic Ring

B: 滚珠轴承 Ball Bearing


TF-M10F DC Brush Motor

Precious Metal-Brush

外形图 Outline Drawing

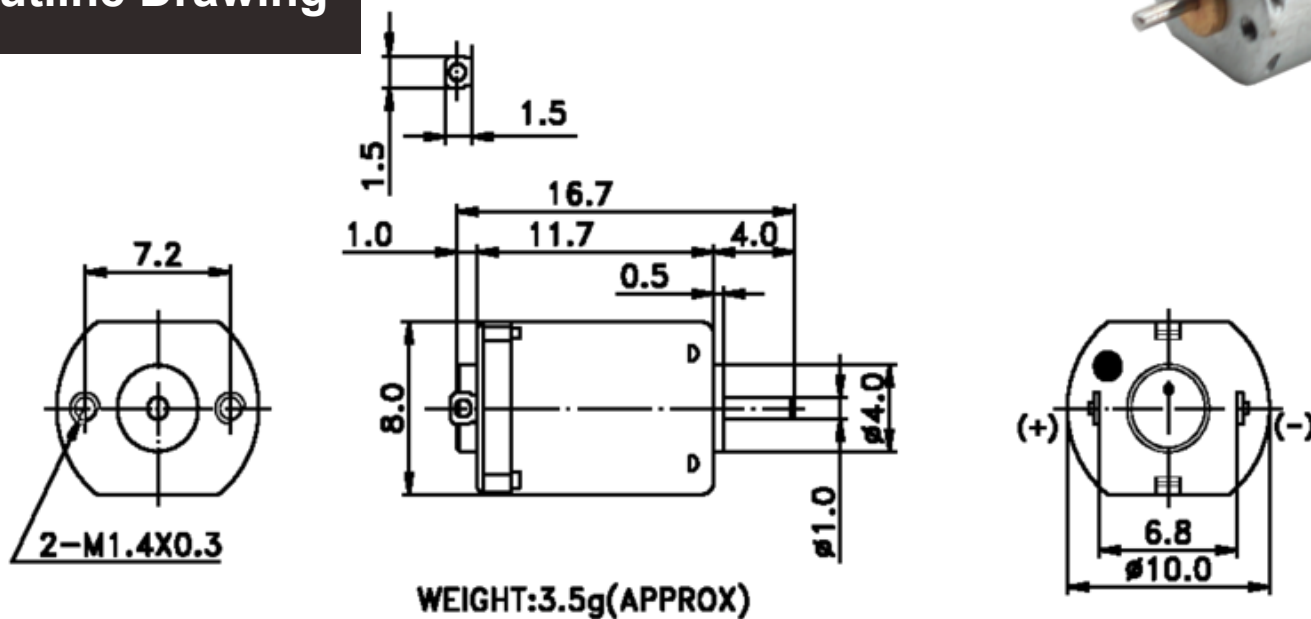

性能曲线 Performance Curve

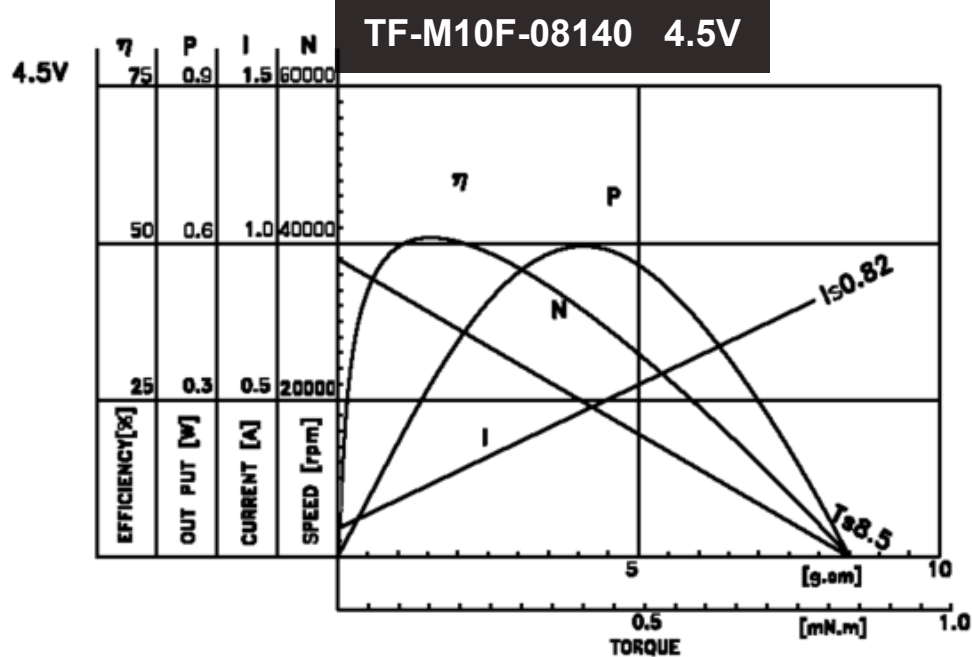

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY				堵转 STALL	
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	扭矩 TORQUE	输出 OUTPUT	扭矩 TORQUE	电流 CURRENT
	V	V	r/min	A	r/min	A	g·cm	W	g·cm	A
TF-M10F-08140	1.0-6.0V	4.5V	37000	0.08	28194	0.26	2.02	0.59	8.5	0.82
GENERAL TEST TOLERANCE			±15%	0.1MAX	±15%	0.31MAX	1.62MIN	0.47MIN	6.8MIN	0.98MAX

注：电机出轴长度及性能参数，EMC对策可依客户要求做调整，详情请咨询相关业务人员。


PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.

TF-M11F DC Brush Motor

Precious Metal-Brush




外形图 Outline Drawing

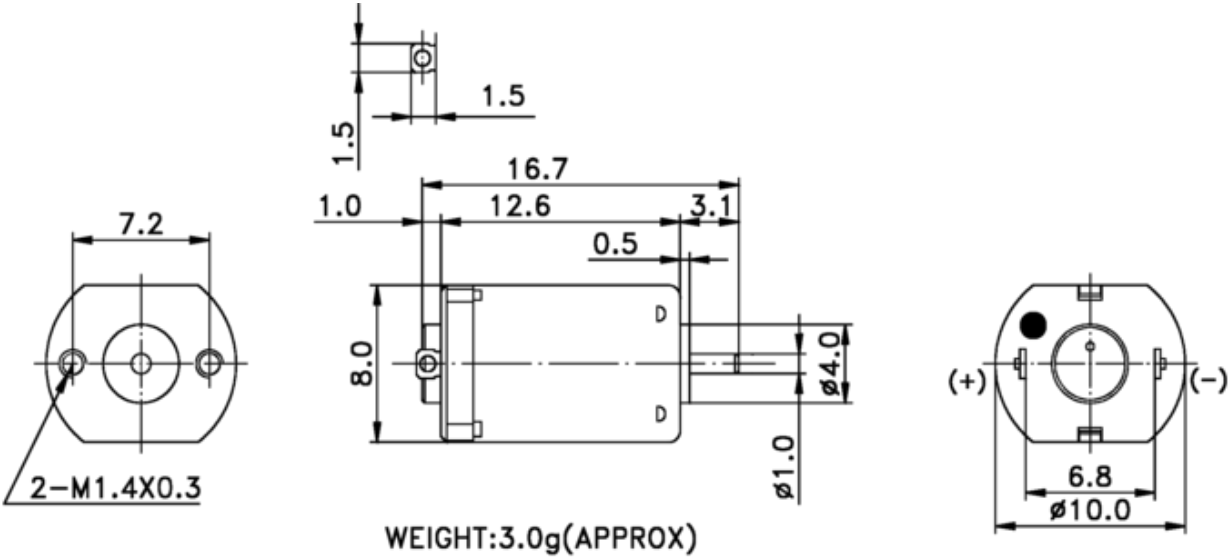


性能曲线 Performance Curve

TF-M11F-09120 4.5V

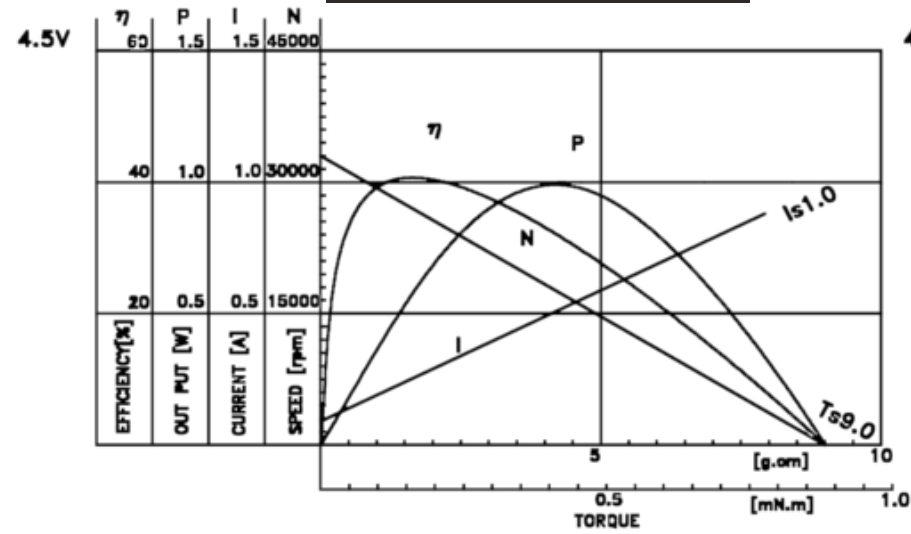

TF-M11F-08150 4.5V

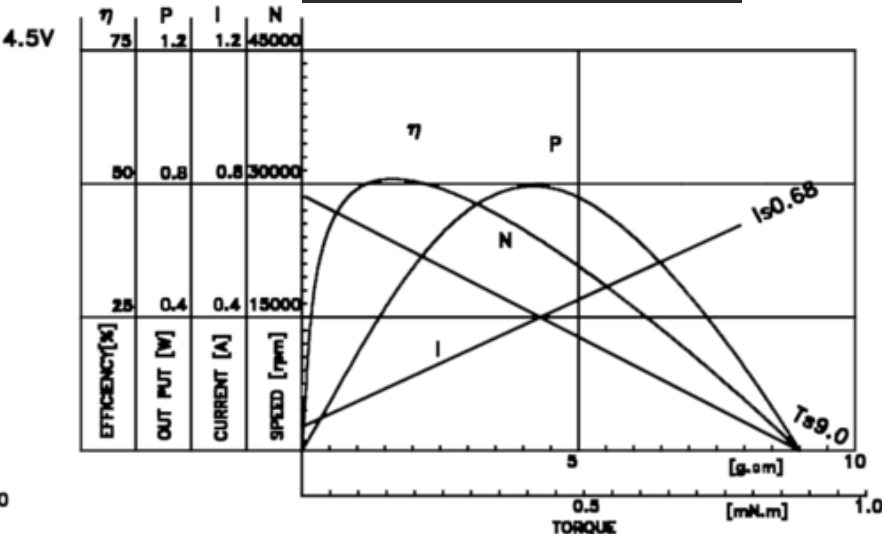

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY				堵转 STALL	
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	扭矩 TORQUE	输出 OUTPUT	扭矩 TORQUE	电流 CURRENT
	V	V	r/min	A	r/min	A	g·cm	W	g·cm	A
TF-M11F-09120	1.0-6.0V	4.5V	33000	0.08	25724	0.28	1.98	0.52	9	1.0
GENERAL TEST TOLERANCE			±15%	0.1MAX	±15%	0.34MAX	1.59MIN	0.42MIN	7.2MIN	1.2MAX
TF-M11F-08150	1.0-6.0V	4.5V	28000	0.05	22027	0.18	1.92	0.43	9	0.68
GENERAL TEST TOLERANCE			±15%	0.1MAX	±15%	0.22MAX	1.54MIN	0.35MIN	7.2MIN	0.82MAX

注：电机出轴长度及性能参数，EMC对策可依客户要求做调整，详情请咨询相关业务人员。



PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.

TF-M20F DC Brush Motor


Precious Metal-Brush

外形图 Outline Drawing

DIRECTION OF ROTATION

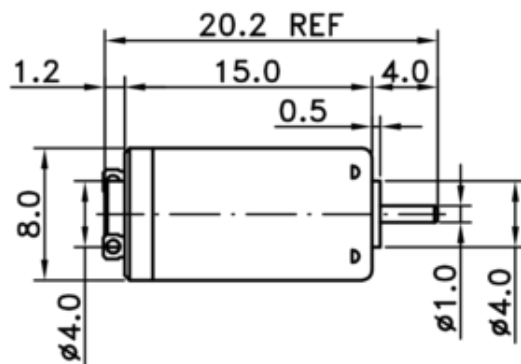
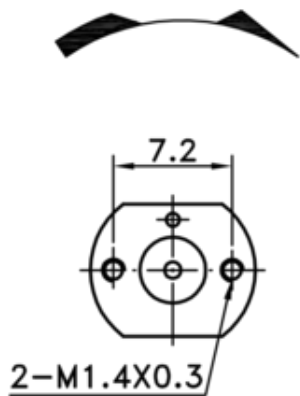


WEIGHT:4g(APPROX)

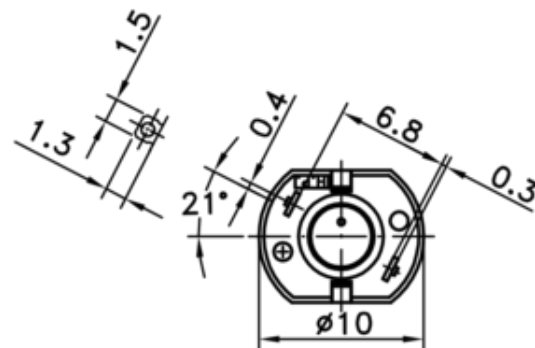

UNIT:mm

性能曲线 Performance Curve

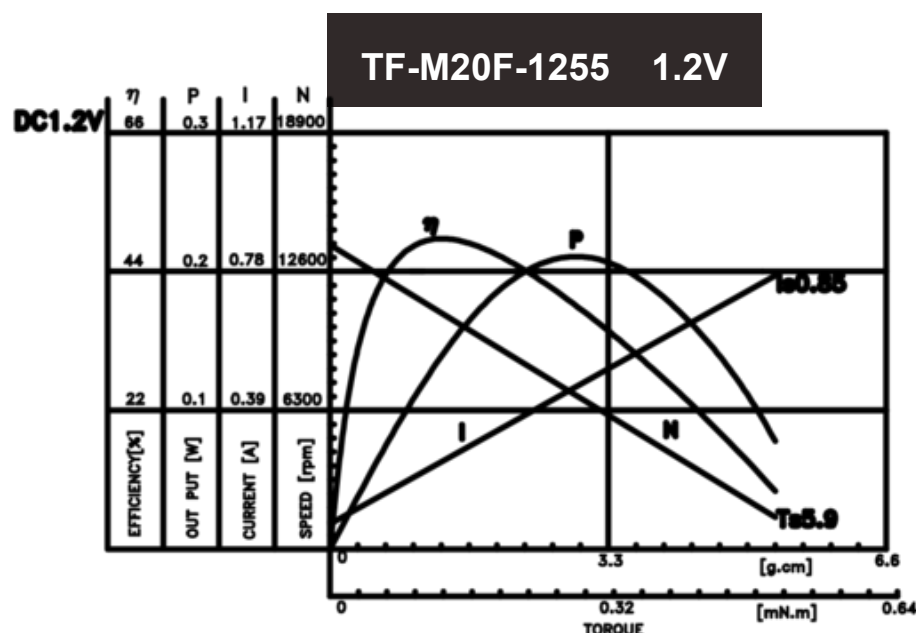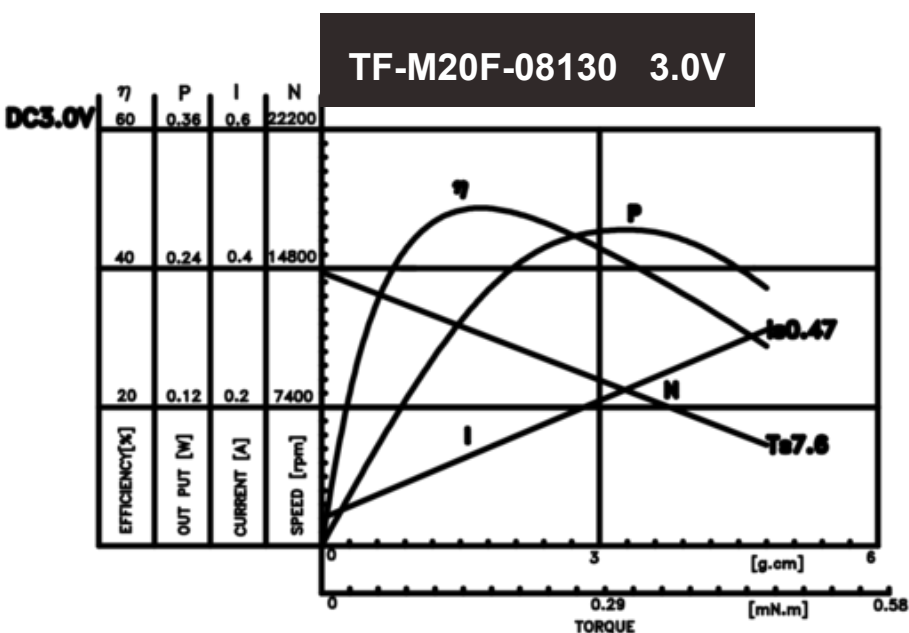

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY				堵转 STALL	
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	扭矩 TORQUE	输出 OUTPUT	扭矩 TORQUE	电流 CURRENT
	V	V	r/min	A	r/min	A	g·cm	W	g·cm	A
TF-M20F-08130	1.5-3.0V	3.0V	14600	0.04	11300	0.137	1.7	0.2	7.6	0.47
GENERAL TEST TOLERANCE			±10%	0.06MAX	±10%	0.15MAX	1.1MIN	0.15MIN	5.4MIN	0.564MAX
TF-M20F-1255	1.0-2.4V	1.2V	13800	0.07	10700	0.244	1.3	0.14	5.9	0.85
GENERAL TEST TOLERANCE			±10%	0.1MAX	±10%	0.29MAX	1.0MIN	0.12MIN	4.7MIN	1.0MAX

注：电机出轴长度及性能参数，EMC对策可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.



TF-N20F DC Brush Motor

Precious Metal-Brush




外形图 Outline Drawing

DIRECTION OF ROTATION

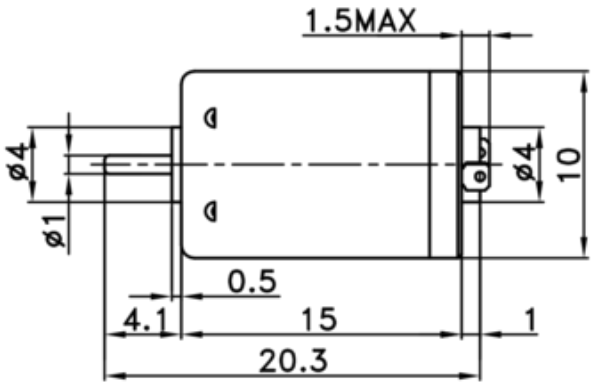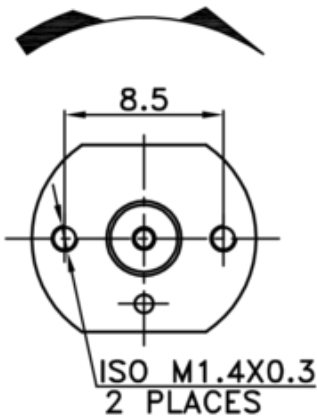


WEIGHT:5g(APPROX)

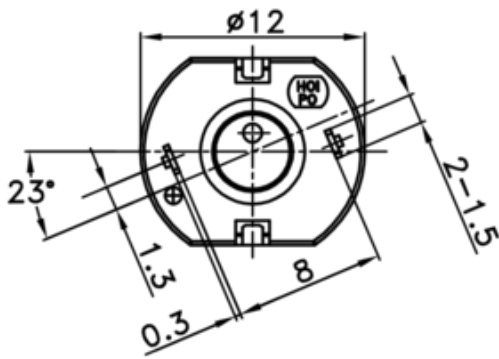


UNIT:mm

性能曲线 Performance Curve

TF-N20F-08260 4.8V

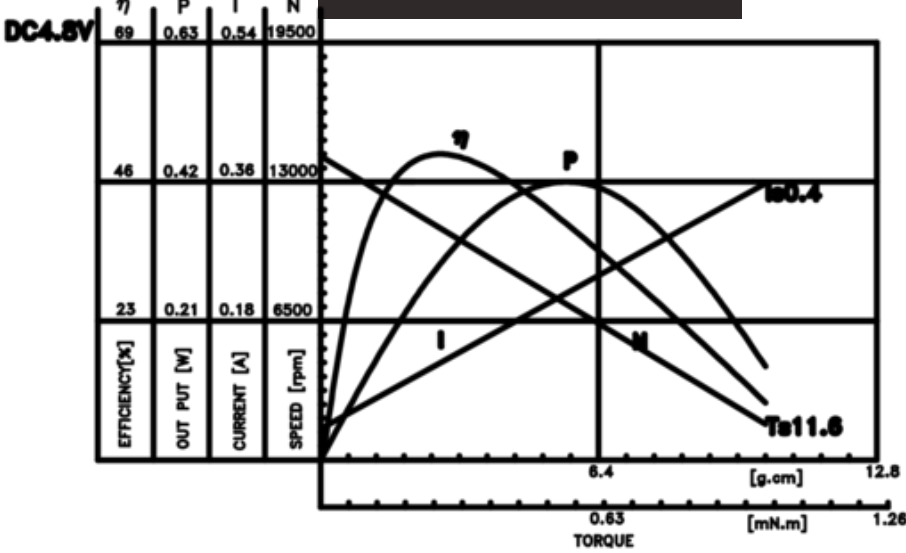

TF-N20F-13115 2.4V

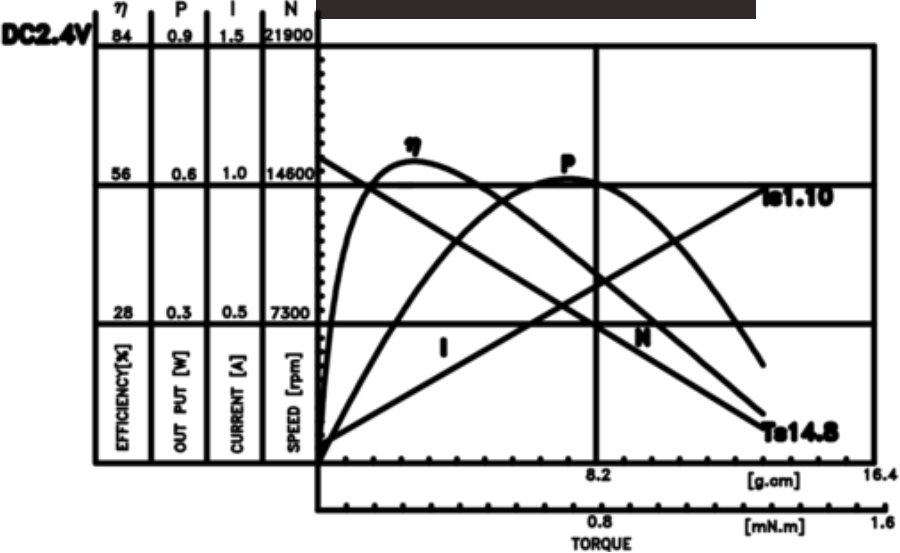

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY				堵转 STALL	
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	扭矩 TORQUE	输出 OUTPUT	扭矩 TORQUE	电流 CURRENT
	V	V	r/min	A	r/min	A	g·cm	W	g·cm	A
TF-N20F-08260	1.5-6.0V	4.8V	14200	0.04	10800	0.126	2.8	0.31	11.6	0.4
GENERAL TEST TOLERANCE			±10%	0.05MAX	±10%	0.15MAX	2.2MIN	0.24MIN	9.2MIN	0.48MAX
TF-N20F-13115	1.0-3.0V	2.4V	16100	0.06	13000	0.257	2.8	0.38	14.8	1.1
GENERAL TEST TOLERANCE			±10%	0.072MAX	±10%	0.31MAX	2.2MIN	0.3MIN	12MIN	1.3MAX

注：电机出轴长度及性能参数，EMC对策可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.




TF-03 DC Brush Motor

Precious Metal-Brush



外形图 Outline Drawing


DIRECTION OF ROTATION

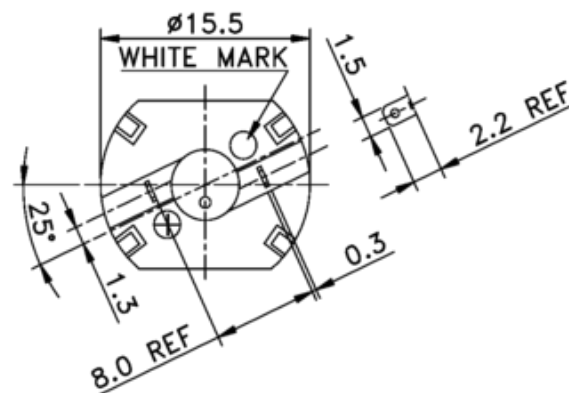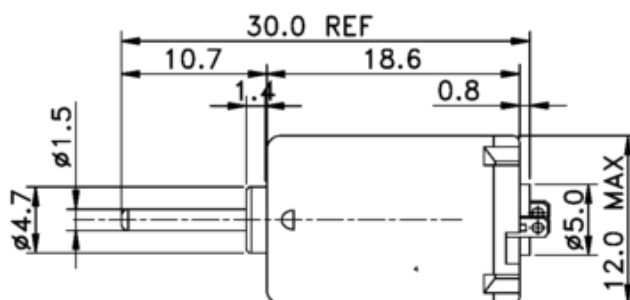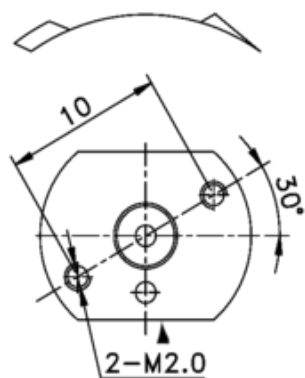

WEIGHT:10g(APPROX)

UNIT:mm

性能曲线 Performance Curve

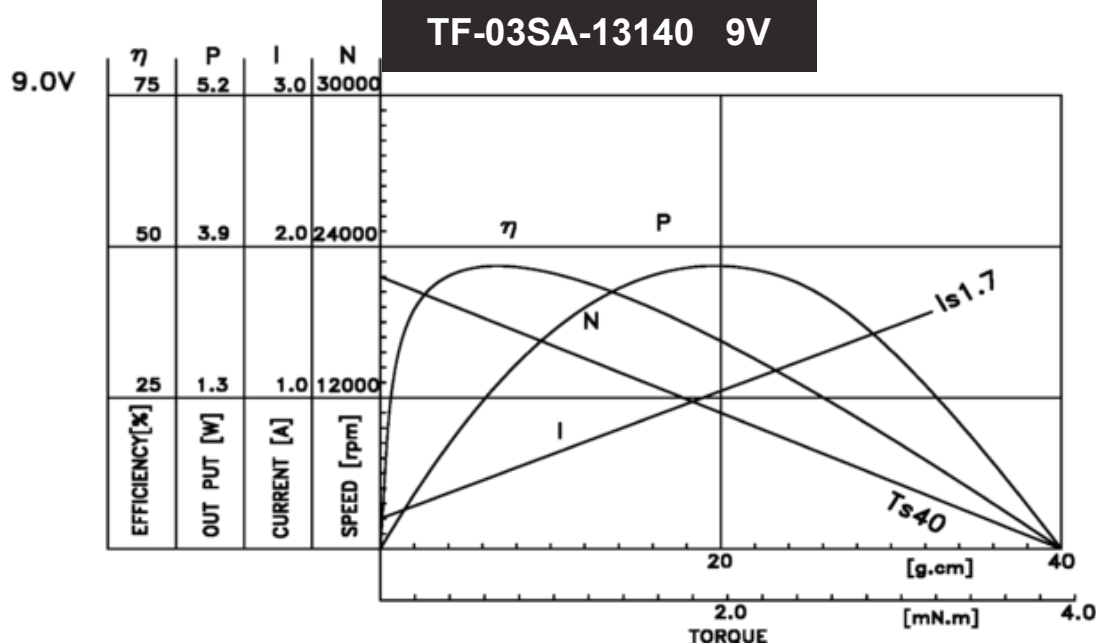

型号

MODEL

电压 VOLTAGE

无负荷 NO LOAD

最大效率 AT MAXIMUM EFFICIENCY

堵转 STALL

范围
RANGE

额定值
NOMINAL

转速
SPEED

电流
CURRENT

转速
SPEED

电流
CURRENT

扭矩
TORQUE

输出
OUTPUT

扭矩
TORQUE

电流
CURRENT

V

V

r/min

A

r/min

A

g·cm

W

g·cm

A

TF-03SA-13140

1.5-9.0V

9.0V

24500

0.06

20625

0.32

6.33

1.34

40

1.7

GENERAL TEST TOLERANCE

±10%

0.08MAX

±15%

0.38MAX

5.06MIN

1.07MIN

32MIN

2.04MAX


注：电机出轴长度及性能参数，EMC对策可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.


TF-13F DC Brush Motor

Precious Metal-Brush

外形图 Outline Drawing

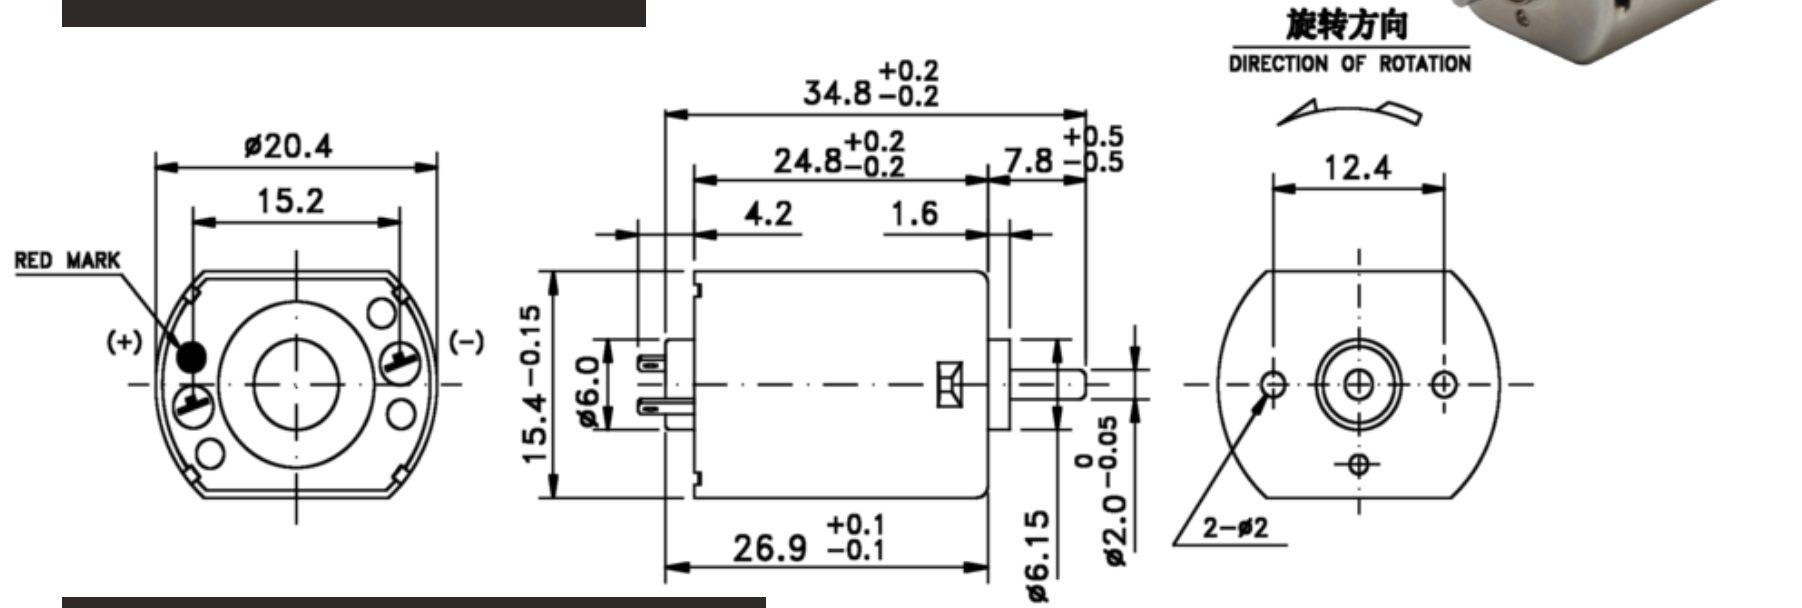

性能曲线 Performance Curve

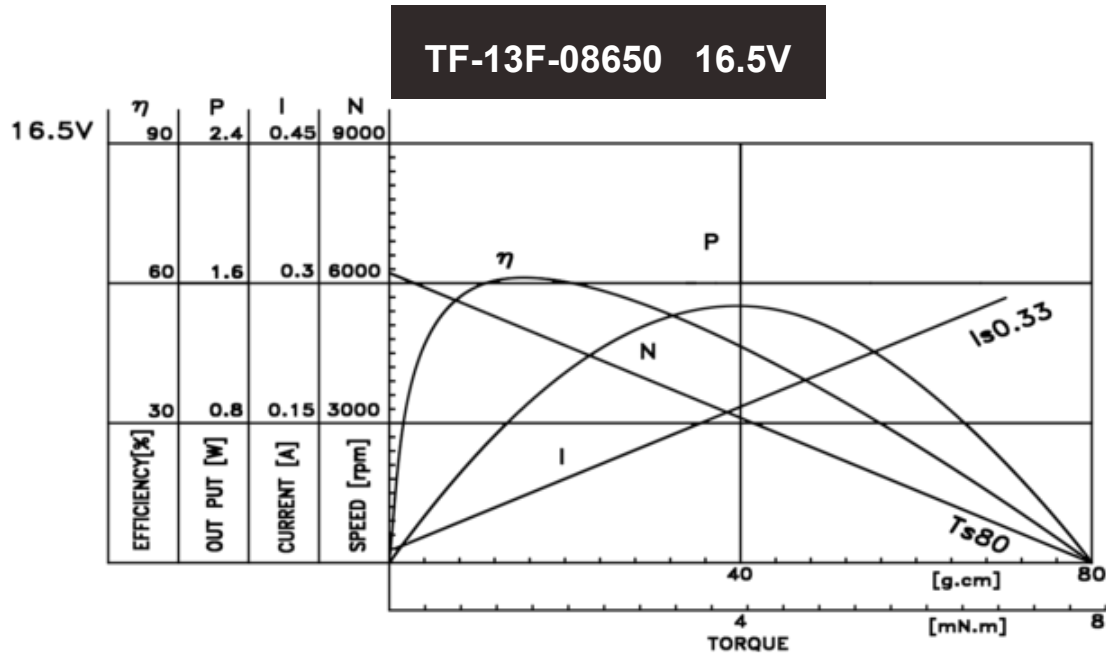


型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY				堵转 STALL	
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	扭矩 TORQUE	输出 OUTPUT	扭矩 TORQUE	电流 CURRENT
	V	V	r/min	A	r/min	A	g·cm	W	g·cm	A
TF-13F-08650	3.0-24V	16.5V	6200	0.018	5026	0.08	15.15	0.78	80	0.33
GENERAL TEST TOLERANCE			±15%	0.025MAX	±15%	0.09MAX	12.1MIN	0.62MIN	64MIN	0.38MAX

注：电机出轴长度及性能参数，EMC对策可依客户要求做调整，详情请咨询相关业务人员。
PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.

TR-30FI DC Brush Motor


Precious Metal-Brush

外形图 Outline Drawing

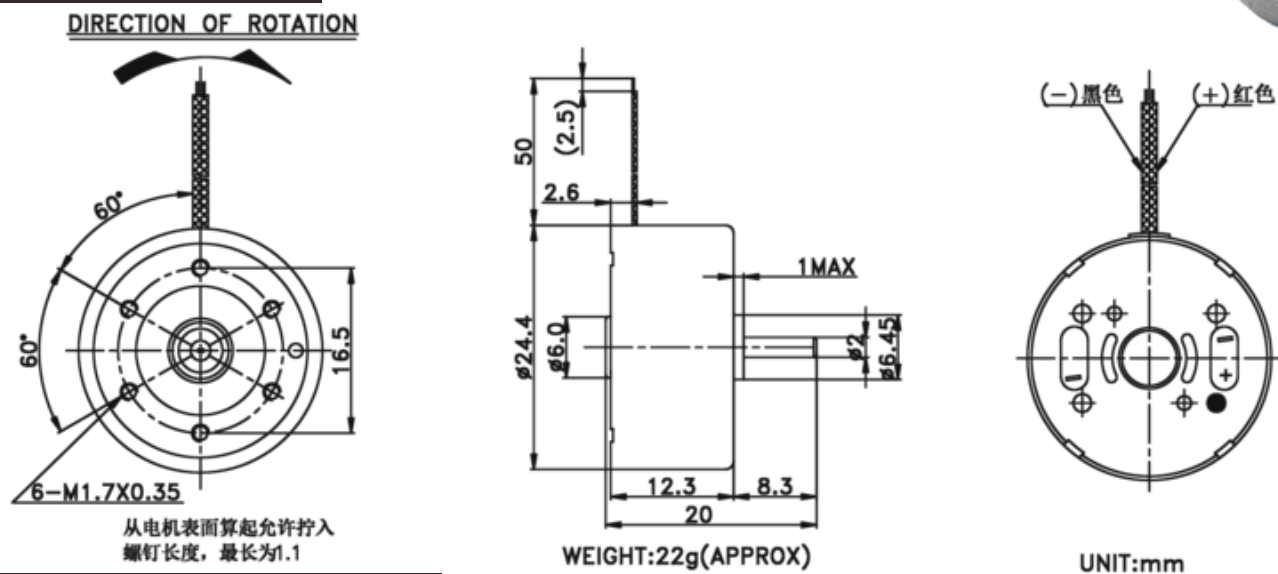

性能曲线 Performance Curve

TR-30FI-115335 3.7V

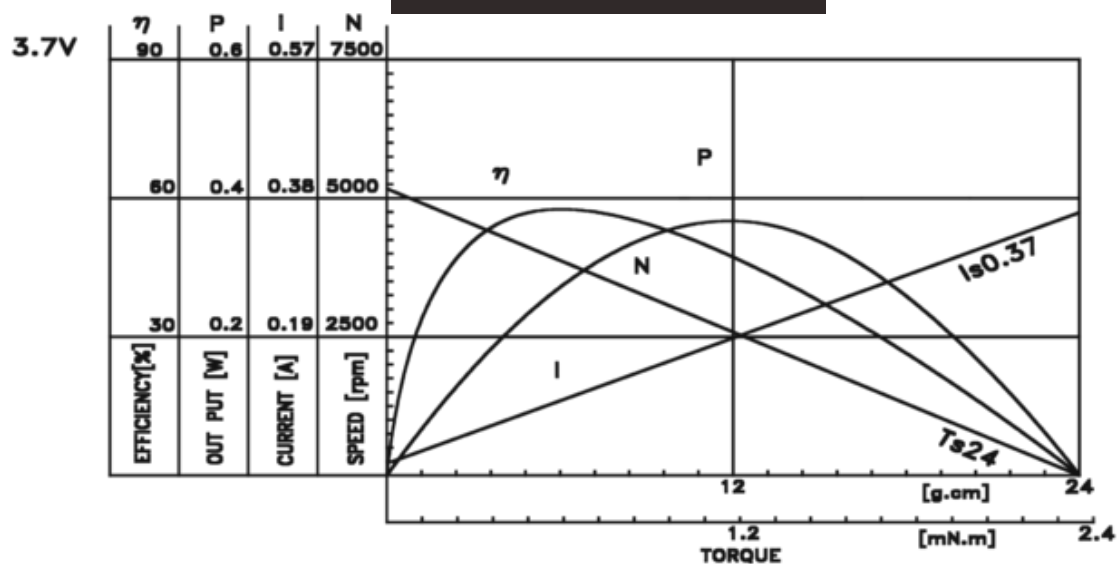

型号

MODEL

电压 VOLTAGE

无负荷 NO LOAD

最大效率 AT MAXIMUM EFFICIENCY

堵转 STALL

范围
RANGE

额定值
NOMINAL

转速
SPEED

电流
CURRENT

转速
SPEED

电流
CURRENT

扭矩
TORQUE

输出
OUTPUT

扭矩
TORQUE

电流
CURRENT

V

V

r/min

A

r/min

A

g·cm

W

g·cm

A

TR-30FI-115335

1.0-6.0V

3.7

5200

0.03

4047

0.105

5.32

0.22

24

0.37

GENERAL TEST TOLERANCE

±15%

0.039MAX

±15%

0.126MAX

4.26MIN

0.18MIN

19MIN

0.44MAX


注：电机出轴长度及性能参数, EMC对策可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.


TR-50F DC Brush Motor

Precious Metal-Brush

外形图 Outline Drawing

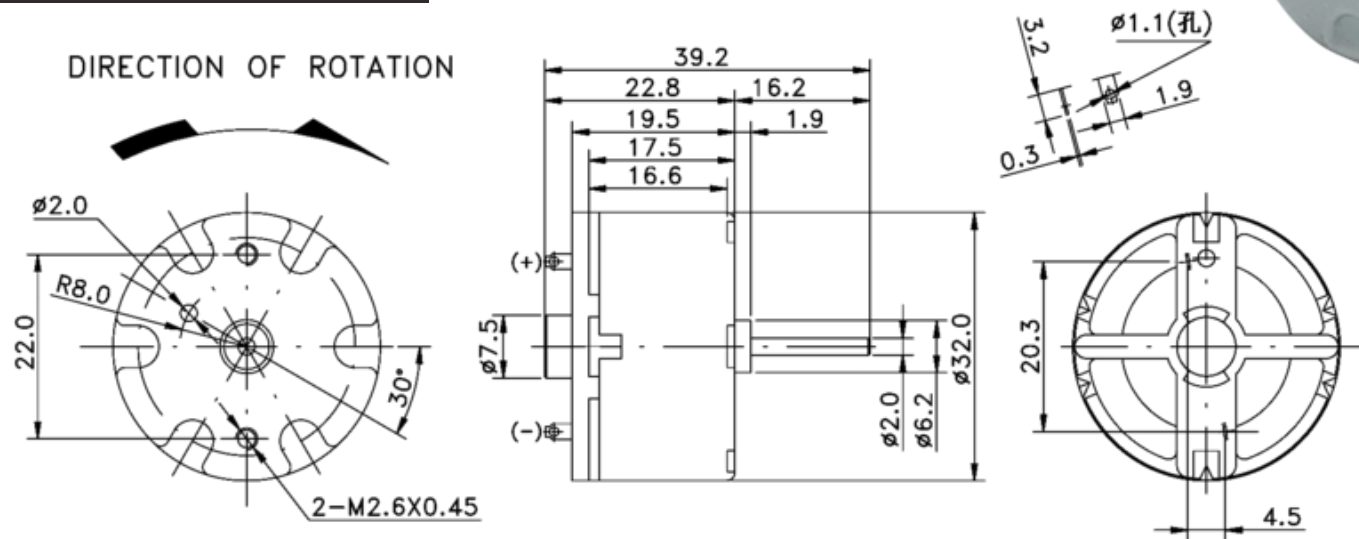

性能曲线 Performance Curve

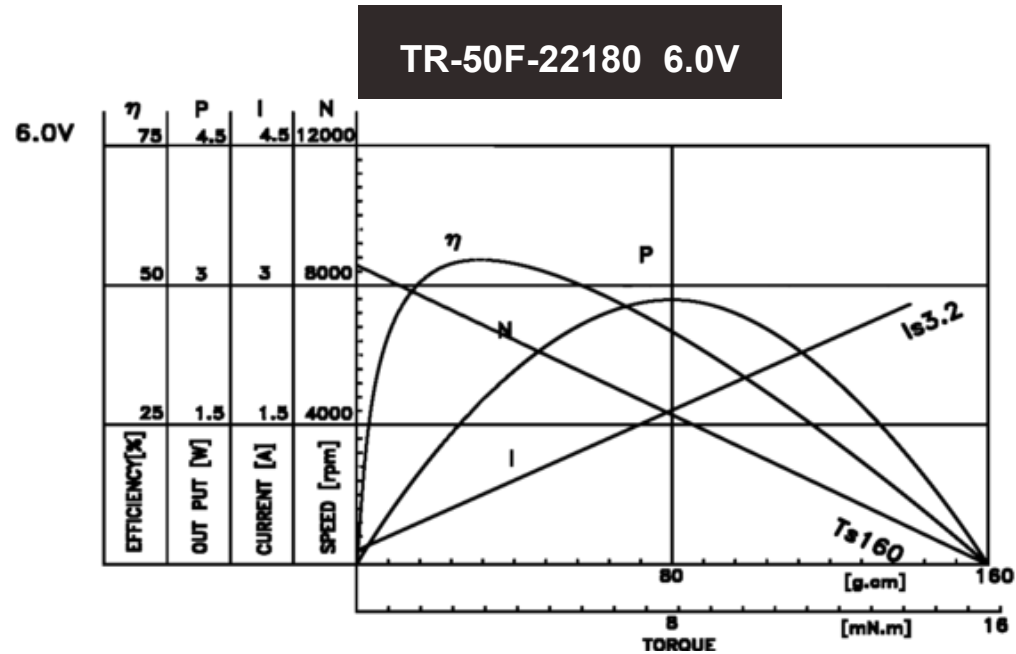

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY				堵转 STALL	
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	扭矩 TORQUE	输出 OUTPUT	扭矩 TORQUE	电流 CURRENT
	V	V	r/min	A	r/min	A	g·cm	W	g·cm	A
TR-50F-22180	1.5-9.0V	6.0V	8600	0.075	7458	0.49	21.24	1.62	160	3.2
GENERAL TEST TOLERANCE			±10%	0.1MAX	±15%	0.59MAX	17MIN	1.3MIN	128MIN	3.84MAX




注：电机出轴长度及性能参数, EMC对策可依客户要求做调整, 详情请咨询相关业务人员。
PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.

TF-13 DC Brush Motor

Carbon-Canister

外形图 Outline Drawing

DIRECTION OF ROTATION

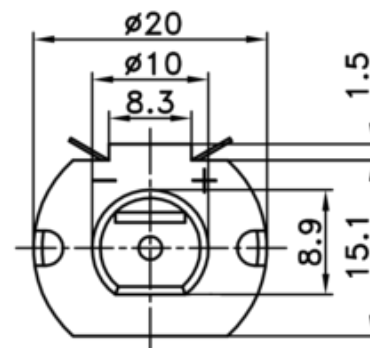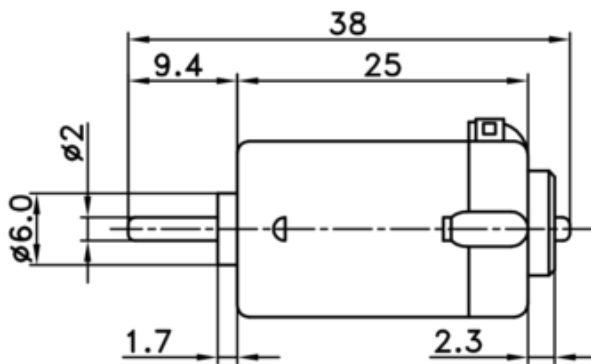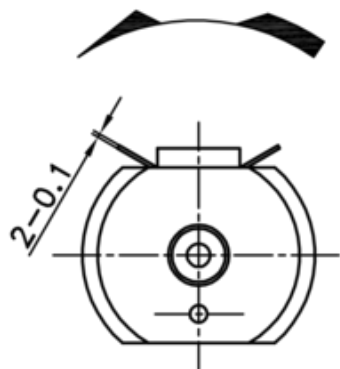


WEIGHT:17g(APPROX)


UNIT:mm

性能曲线 Performance Curve

TF-13-18110 3V

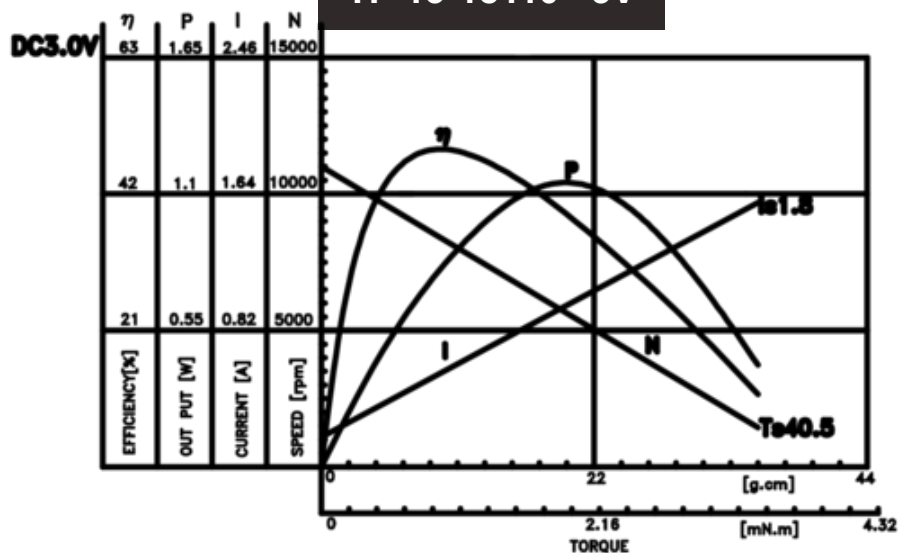

TF-13-2270 4.8V

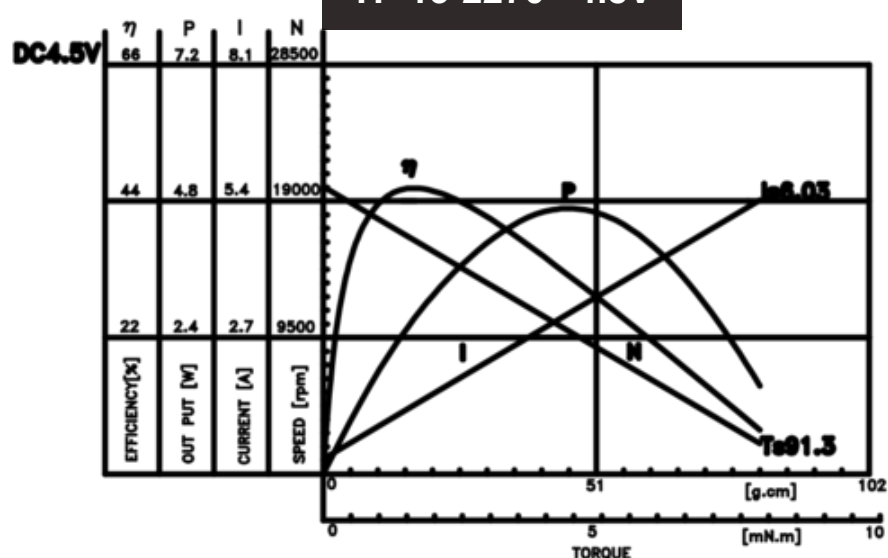

型号

MODEL

电压 VOLTAGE

无负荷 NO LOAD

最大效率 AT MAXIMUM EFFICIENCY

堵转 STALL

范围
RANGE

额定值
NOMINAL

转速
SPEED

电流
CURRENT

转速
SPEED

电流
CURRENT

扭矩
TORQUE

输出
OUTPUT

扭矩
TORQUE

电流
CURRENT

V

V

r/min

A

r/min

A

g·cm

W

g·cm

A

TF-13-18110	1.5-6.0V	3.0V	11000	0.18	8400	0.569	9.7	0.83	40.5	1.8
GENERAL TEST TOLERANCE			±10%	0.24MAX	±10%	0.72MAX	8MIN	0.68MIN	32MIN	2.2MAX
TF-13-2270	1.5-4.5V	4.5V	20000	0.30	16400	1.345	16.6	2.79	91.2	6.03
GENERAL TEST TOLERANCE			±10%	0.39MAX	±10%	1.6MAX	13MIN	2.3MIN	73MIN	7.2MAX


注：电机出轴长度及性能参数，EMC对策可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.

TR-14 DC Brush Motor

Carbon-Canister



外形图 Outline Drawing

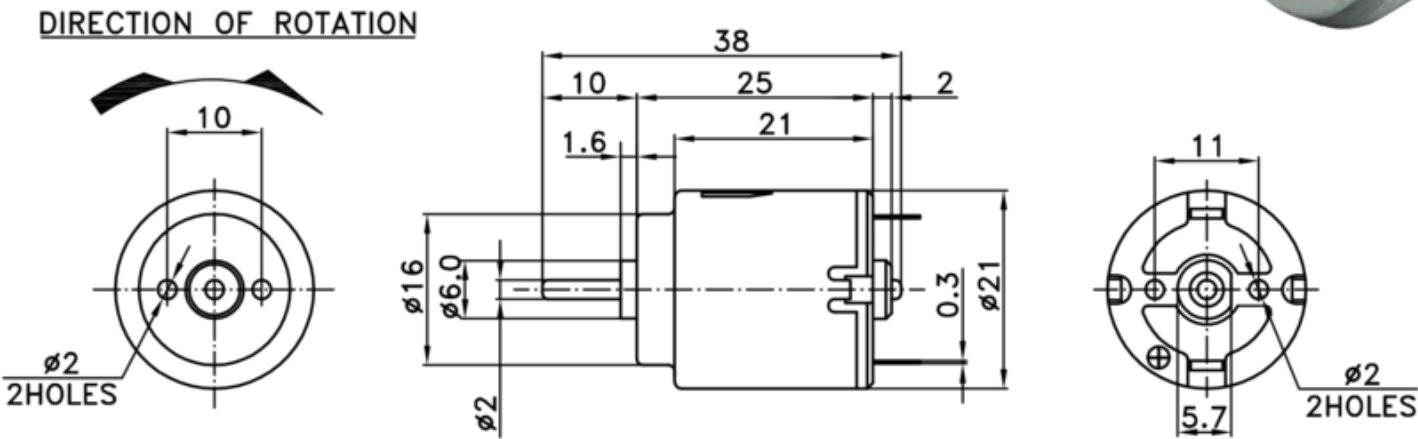

WEIGHT:19g(APPROX)

UNIT:mm

性能曲线 Performance Curve

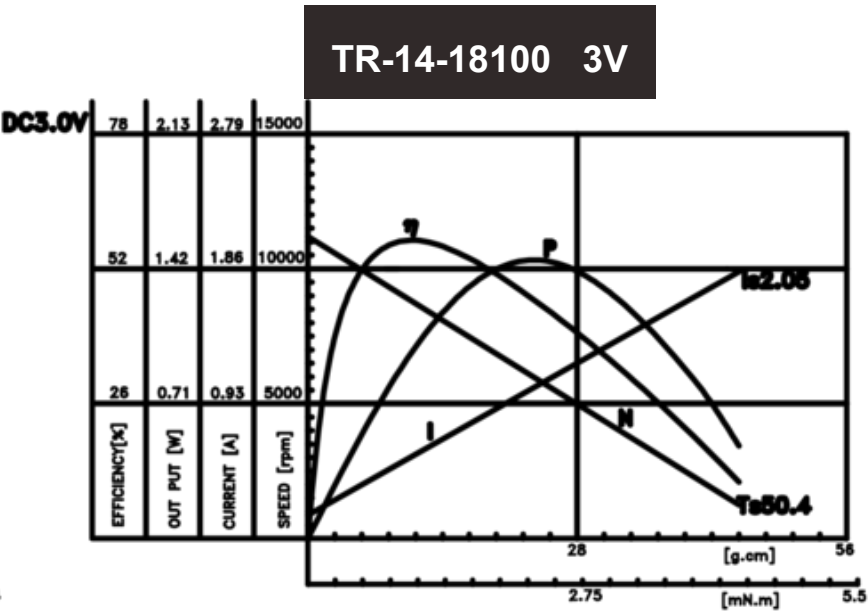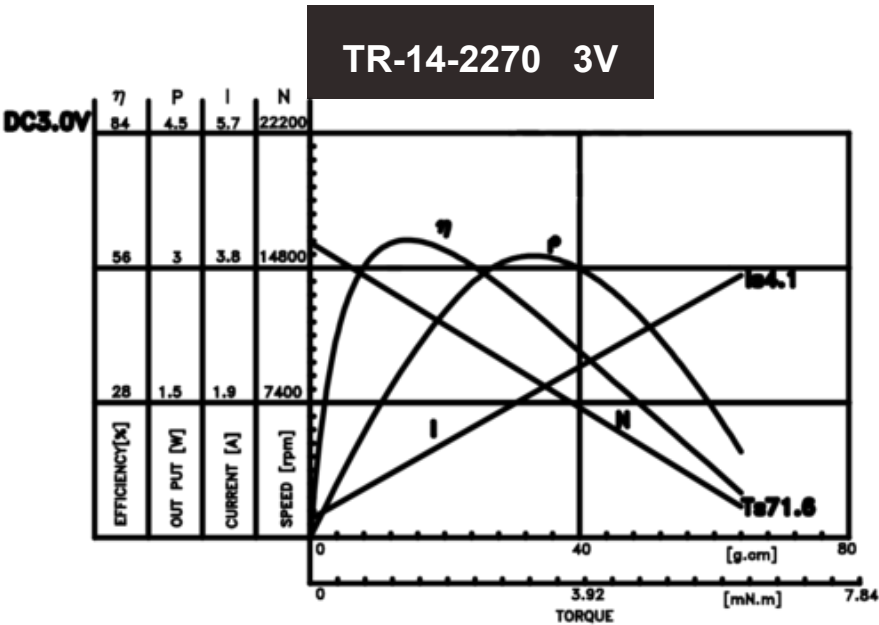

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY				堵转 STALL	
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	扭矩 TORQUE	输出 OUTPUT	扭矩 TORQUE	电流 CURRENT
	V	V	r/min	A	r/min	A	g·cm	W	g·cm	A
TR-14-2270	1.5-4.5V	3.0V	16200	0.26	12900	1.032	14.4	1.91	71.6	4.1
GENERAL TEST TOLERANCE			±10%	0.34MAX	±10%	1.24MAX	12MIN	1.5MIN	57MIN	4.9MAX
TR-14-18100	1.5-6.0V	3.0V	11200	0.16	8800	0.573	11	0.99	50.4	2.05
GENERAL TEST TOLERANCE			±10%	0.21MAX	±10%	0.69MAX	8.8MIN	0.79MIN	40MIN	2.5MAX

注：电机出轴长度及性能参数，EMC对策可依客户要求做调整，详情请咨询相关业务人员。



PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.

TR-26 DC Brush Motor


Carbon-Canister

外形图 Outline Drawing

DIRECTION OF ROTATION

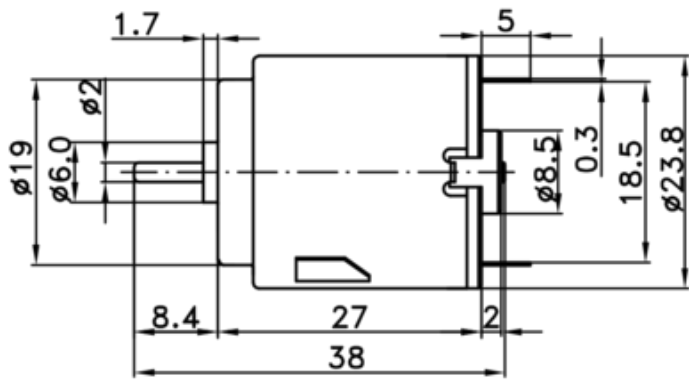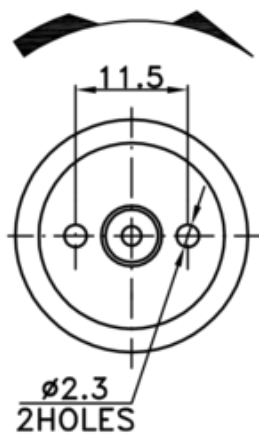


WEIGHT:27.5g(APPROX)

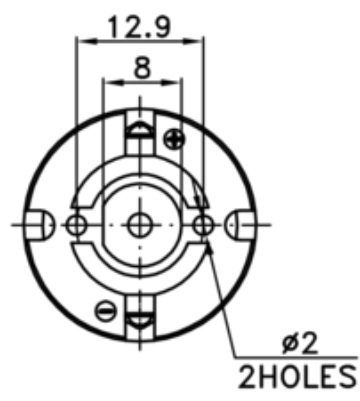

UNIT:mm

性能曲线 Performance Curve

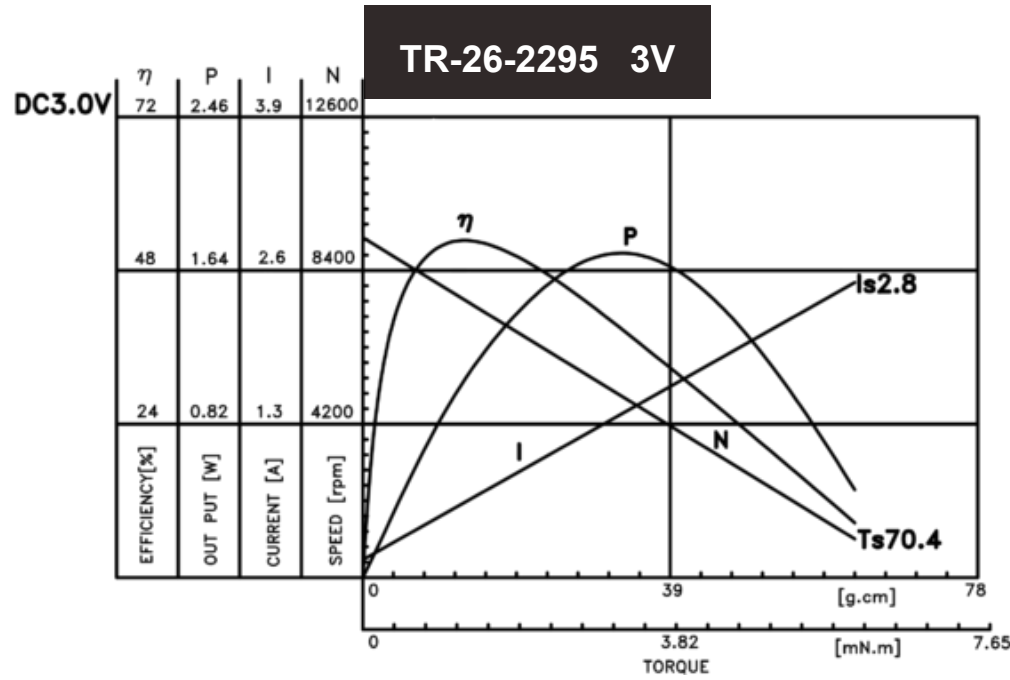

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY				堵转 STALL	
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	扭矩 TORQUE	输出 OUTPUT	扭矩 TORQUE	电流 CURRENT
	V	V	r/min	A	r/min	A	g·cm	W	g·cm	A
TR-26-2295	1.5-6.0V	3.0V	9300	0.15	7600	0.643	13.2	1.02	70.4	2.8
GENERAL TEST TOLERANCE			±10%	0.2MAX	±10%	0.78MAX	11MIN	0.82MIN	56MIN	3.4MAX


注：电机出轴长度及性能参数, EMC对策可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.


TF-26 DC Brush Motor

Carbon-Canister

外形图 Outline Drawing

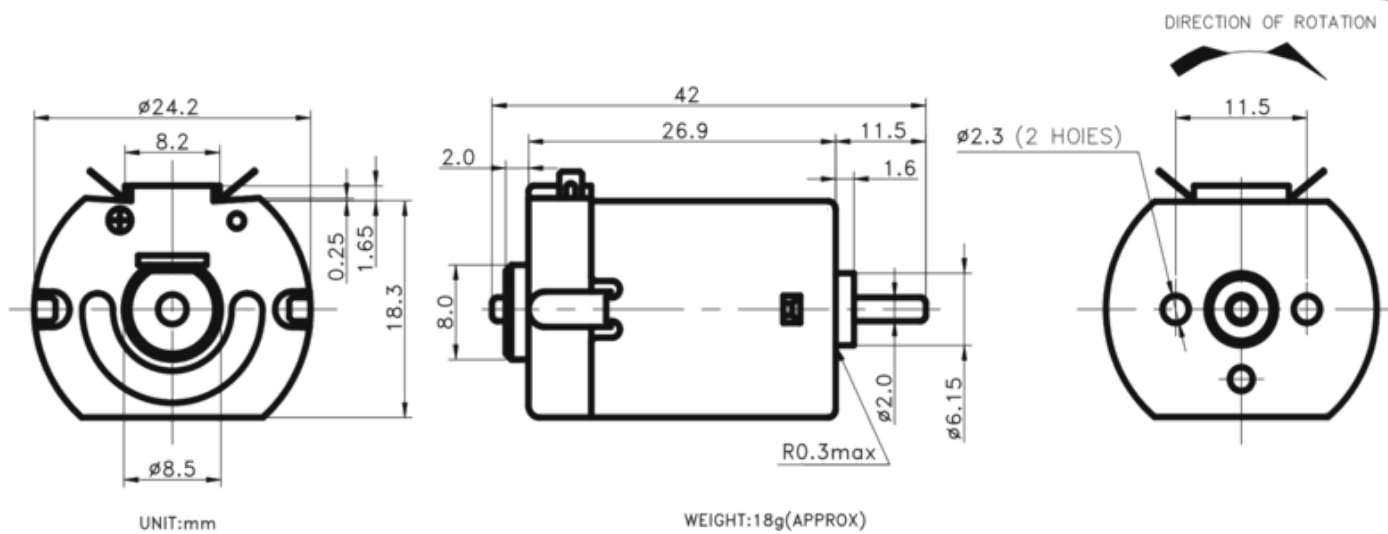

性能曲线 Performance Curve

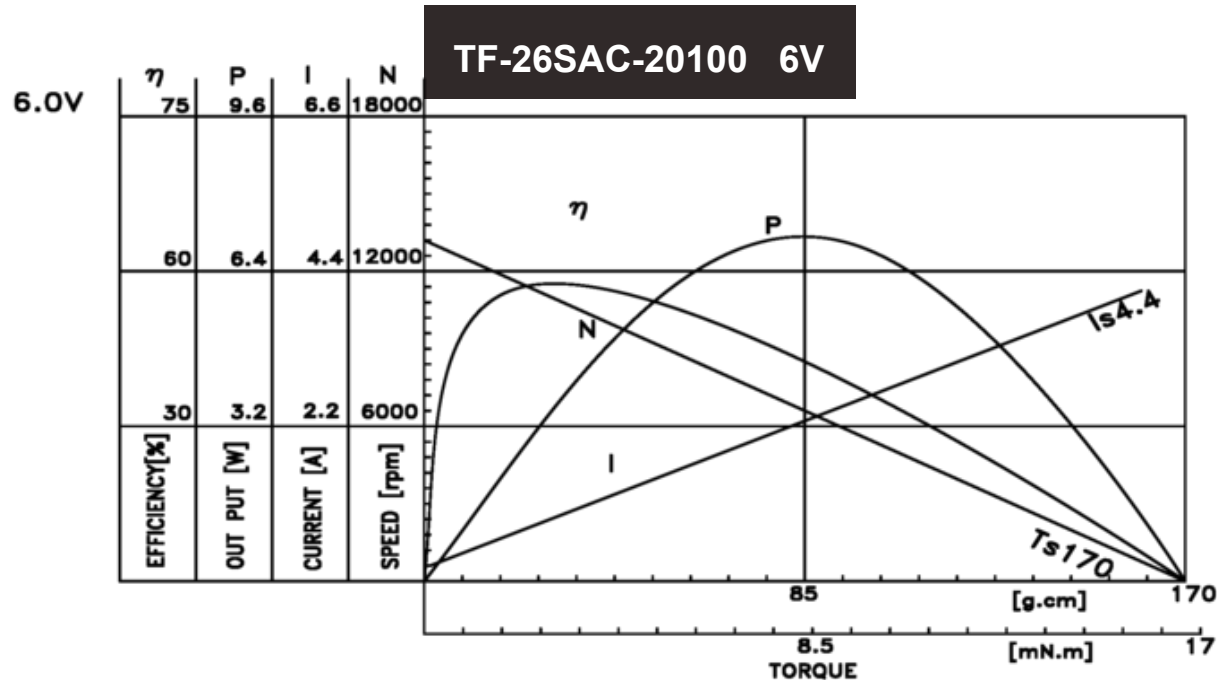

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY				堵转 STALL	
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	扭矩 TORQUE	输出 OUTPUT	扭矩 TORQUE	电流 CURRENT
	V	V	r/min	A	r/min	A	g·cm	W	g·cm	A
TF-26SAC-20100	1.0-9.0V	6.0V	13000	0.19	10763	0.91	29.25	3.23	170	4.4
GENERAL TEST TOLERANCE			±10%	0.25MAX	±15%	1.1MAX	23.4MIN	2.58MIN	136MIN	5.28MAX

注：电机出轴长度及性能参数, EMC对策可依客户要求做调整, 详情请咨询相关业务人员。



PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.

TR-28 DC Brush Motor


Carbon-Canister

外形图 Outline Drawing

DIRECTION OF ROTATION

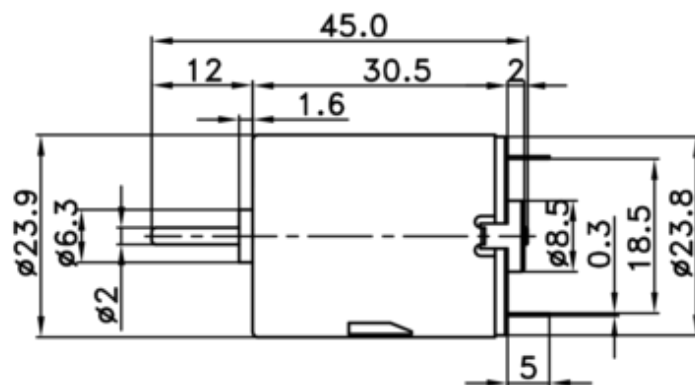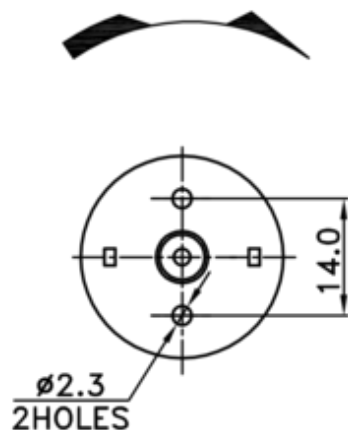


WEIGHT:42g(APPROX)

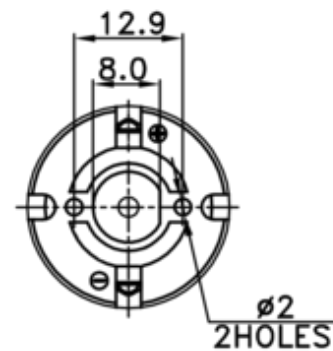


UNIT:mm

性能曲线 Performance Curve

TR-28-2865 3V

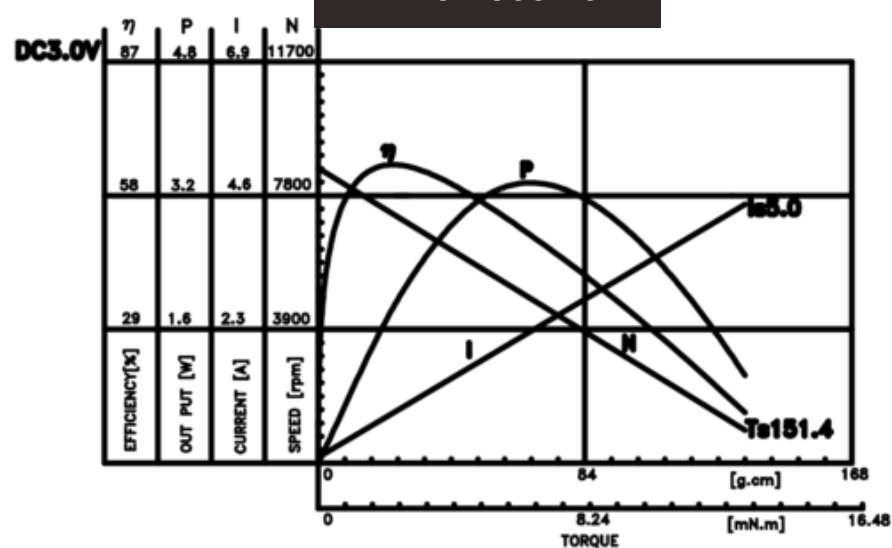

TR-28S-2865 3V

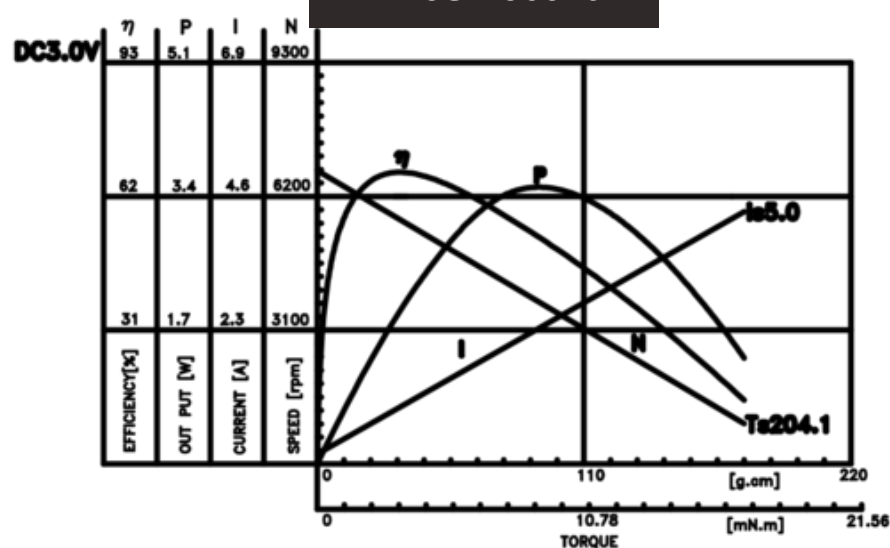

型号

MODEL

电压 VOLTAGE

无负荷 NO LOAD

最大效率 AT MAXIMUM EFFICIENCY

堵转 STALL

范围
RANGE

额定值
NOMINAL

转速
SPEED

电流
CURRENT

转速
SPEED

电流
CURRENT

扭矩
TORQUE

输出
OUTPUT

扭矩
TORQUE

电流
CURRENT

V

V

r/min

A

r/min

A

g·cm

W

g·cm

A

TR-28-2865	1.5-6.0V	3.0V	8600	0.15	7300	0.866	22.4	1.68	151.4	5
GENERAL TEST TOLERANCE			±10%	0.195MAX	±10%	1.0MAX	18MIN	1.3MIN	120MIN	6.0MAX
TR-28S-2865	1.5-4.5V	3.0V	6800	0.17	5700	0.922	31.8	1.87	204.1	5
GENERAL TEST TOLERANCE			±10%	0.22MAX	±10%	1.2MAX	25MIN	1.5MIN	160MIN	6.0MAX


注：电机出轴长度及性能参数，EMC对策可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.


TF-28 DC Brush Motor

Carbon-Canister

外形图 Outline Drawing

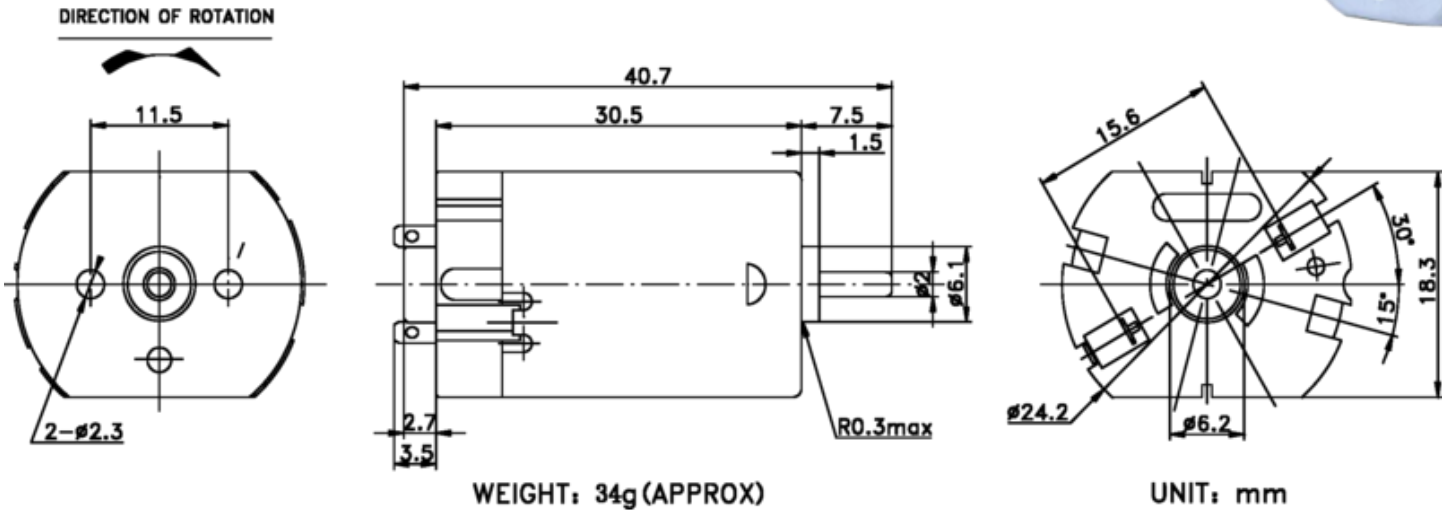

性能曲线 Performance Curve

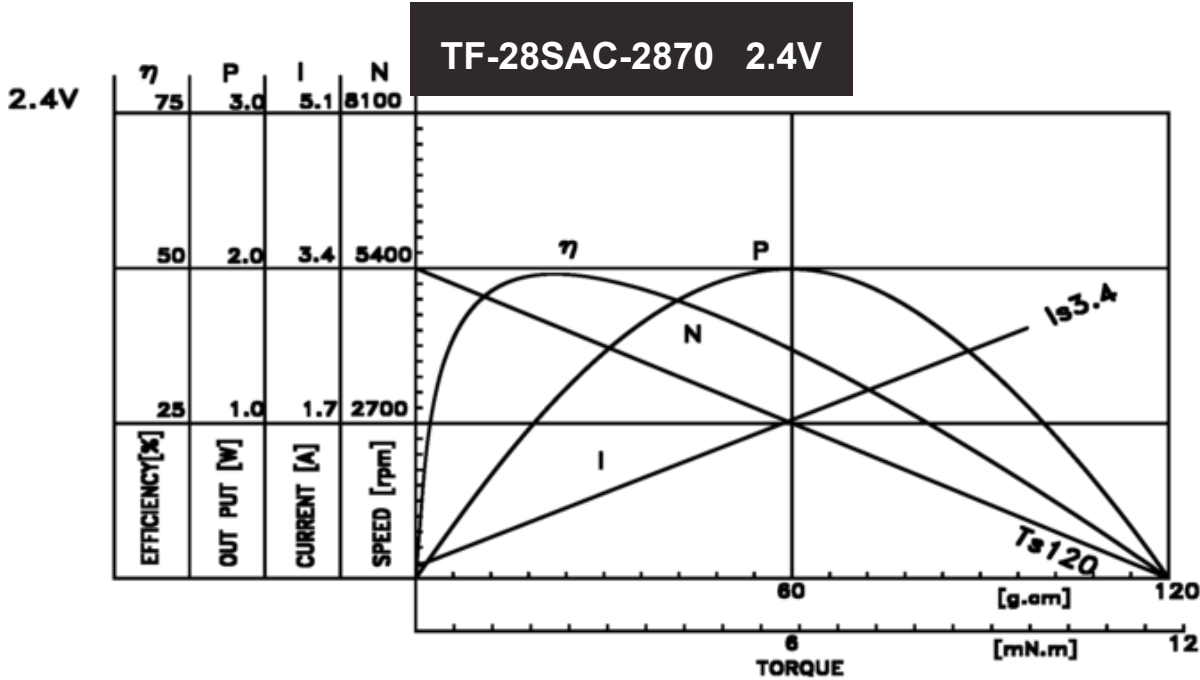

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY				堵转 STALL	
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	扭矩 TORQUE	输出 OUTPUT	扭矩 TORQUE	电流 CURRENT
	V	V	r/min	A	r/min	A	g·cm	W	g·cm	A
TF-28SAC-2870	1.5-6.0V	2.4V	5400	0.3	4163	1.01	27.48	1.17	120	3.4
GENERAL TEST TOLERANCE			±15%	0.39MAX	±15%	1.21MAX	22MIN	0.94MIN	96MIN	4.08MAX


注：电机出轴长度及性能参数, EMC对策可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.

TR-37 DC Brush Motor


Carbon-Canister

外形图 Outline Drawing

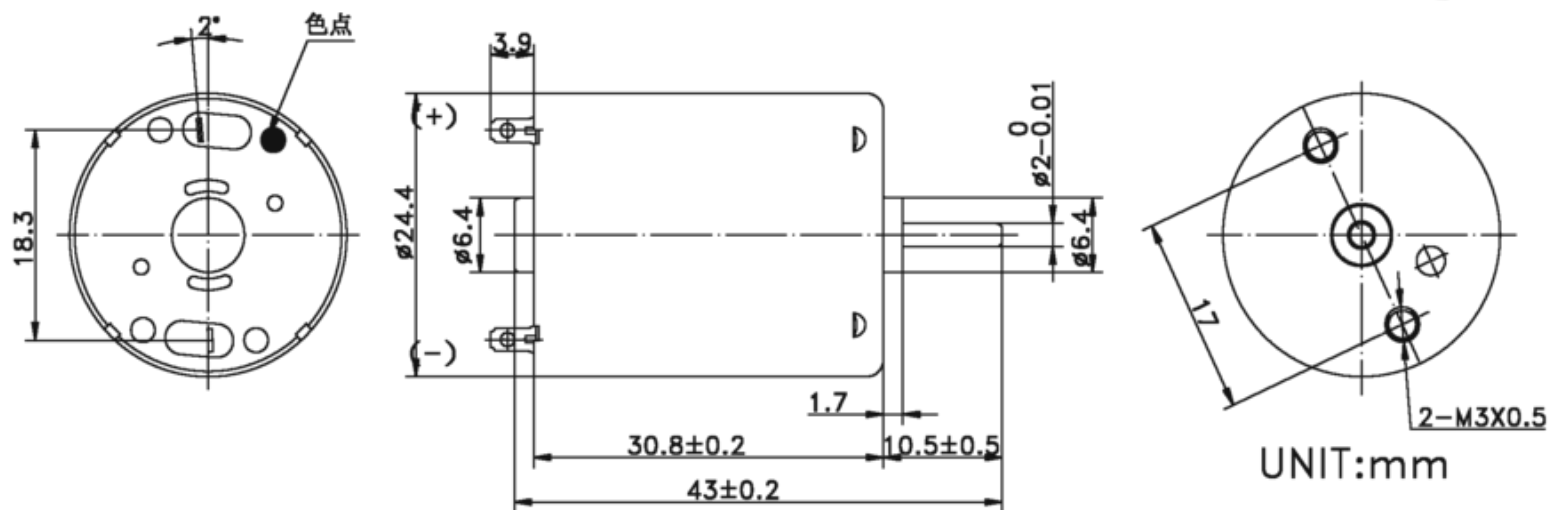


性能曲线 Performance Curve

TR-370-12470 12V

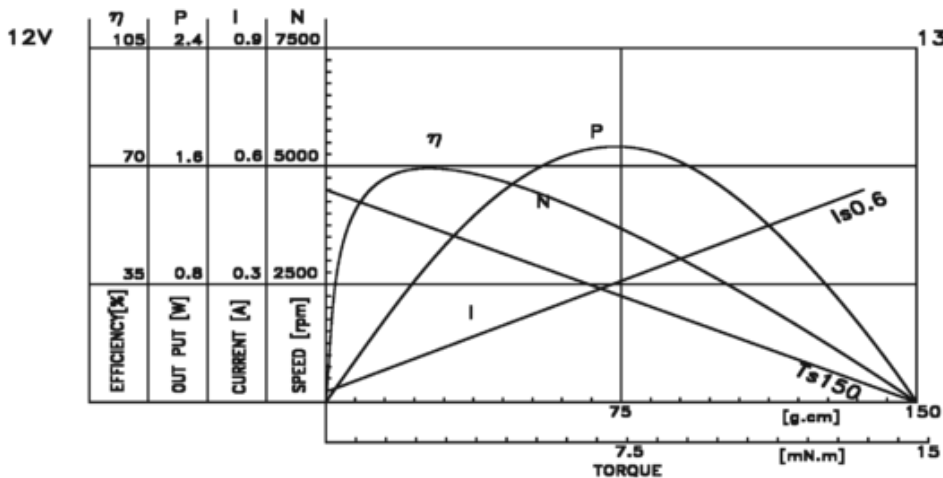

TR-370-09980 13.5V

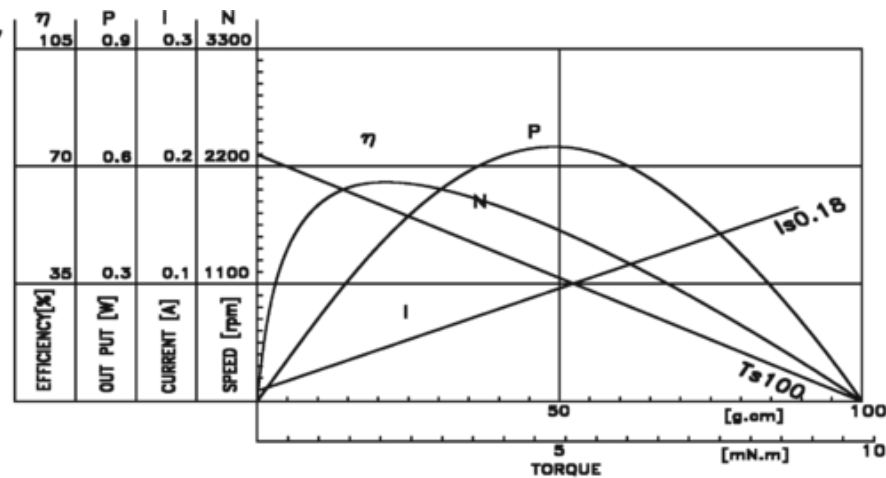

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY				堵转 STALL	
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	扭矩 TORQUE	输出 OUTPUT	扭矩 TORQUE	电流 CURRENT
	V	V	r/min	A	r/min	A	g·cm	W	g·cm	A
TR-370-12470	3.0-18V	12.0V	4500	0.015	3886	0.095	20.48	0.816	150	0.6
GENERAL TEST TOLERANCE			±15%	0.02MAX	±15%	0.11MAX	16.4MIN	0.65MIN	120MIN	0.68MAX
TR-370-09980	3.0-18V	13.5V	2300	0.01	1861	0.04	19.07	0.36	100	0.18
GENERAL TEST TOLERANCE			±15%	0.02MAX	±15%	0.05MAX	15.3MIN	0.29MIN	80MIN	1.21MAX


注：电机出轴长度及性能参数，EMC对策可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.

TR-38 DC Brush Motor


Carbon-Canister

外形图 Outline Drawing

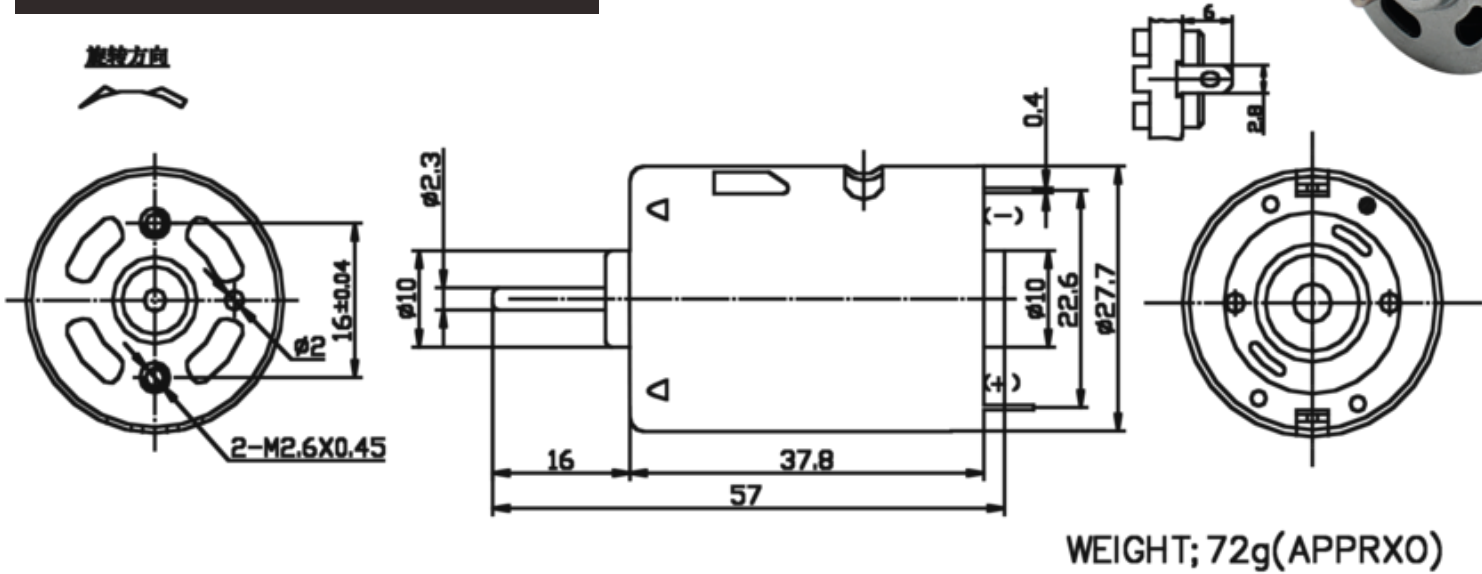


性能曲线 Performance Curve

TR-380SAC-4730 6V

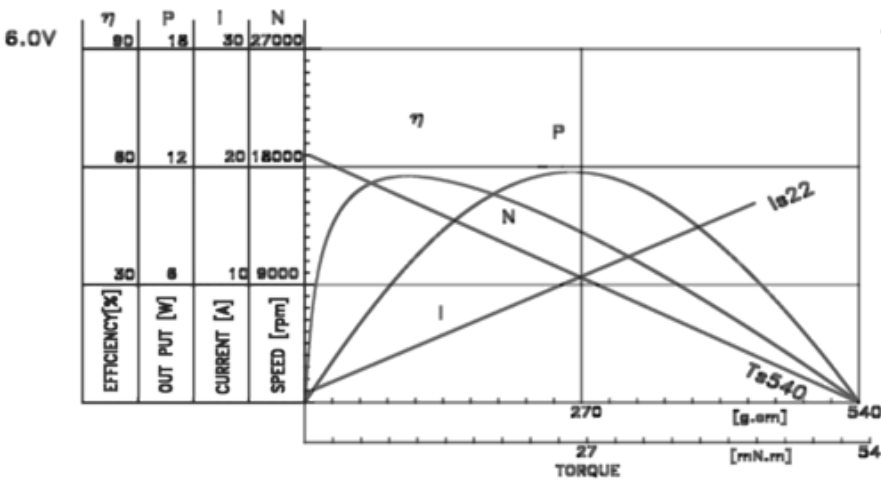

TR-380SMC-4914 7.2V

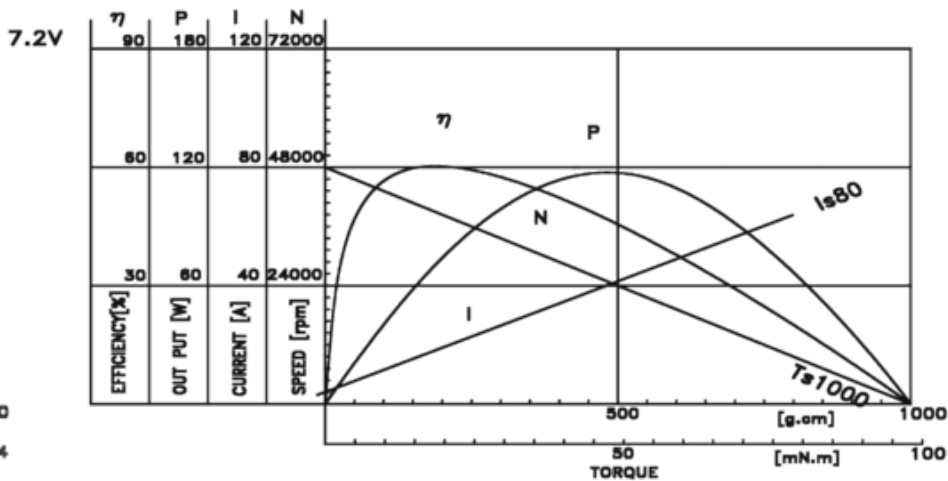

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		最大效率 AT MAXIMUM EFFICIENCY				堵转 STALL	
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT	转速 SPEED	电流 CURRENT	扭矩 TORQUE	输出 OUTPUT	扭矩 TORQUE	电流 CURRENT
	V	V	r/min	A	r/min	A	g·cm	W	g·cm	A
TR-380SAC-4730	1.0-12V	6.0V	19000	0.65	16213	3.78	79.21	13.17	540	22
GENERAL TEST TOLERANCE			±15%	0.85MAX	±15%	4.54MAX	63.4MIN	10.5MIN	432MIN	26.4MAX
TR-380SMC-4914	1.0-12V	7.4V	48000	2.5	40789	14.14	150.22	62.85	1000	80
GENERAL TEST TOLERANCE			±15%	3.25MAX	±15%	17MAX	120MIN	50.3MIN	800MIN	96MAX

注：电机出轴长度及性能参数，EMC对策可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor shaft length and performance parameters, EMC countermeasures can be adjusted according to customer requirements, please consult relevant sales personnel for details.

直流无刷电机

BRUSHLESS DC MOTOR




无刷直流电机由电动机主体和驱动器组成，是一种典型的机电一体化产品。无刷电机是指无电刷和换向器（或集电环）的电机，又称无换向器电机。


Brushless DC motor is a typical mechatronics product, which is composed of motor body and driver. Brushless motor refers to the motor without brush and commutator (or collector ring), also known as commutatorless motor.

命名规则

Motor Number Information

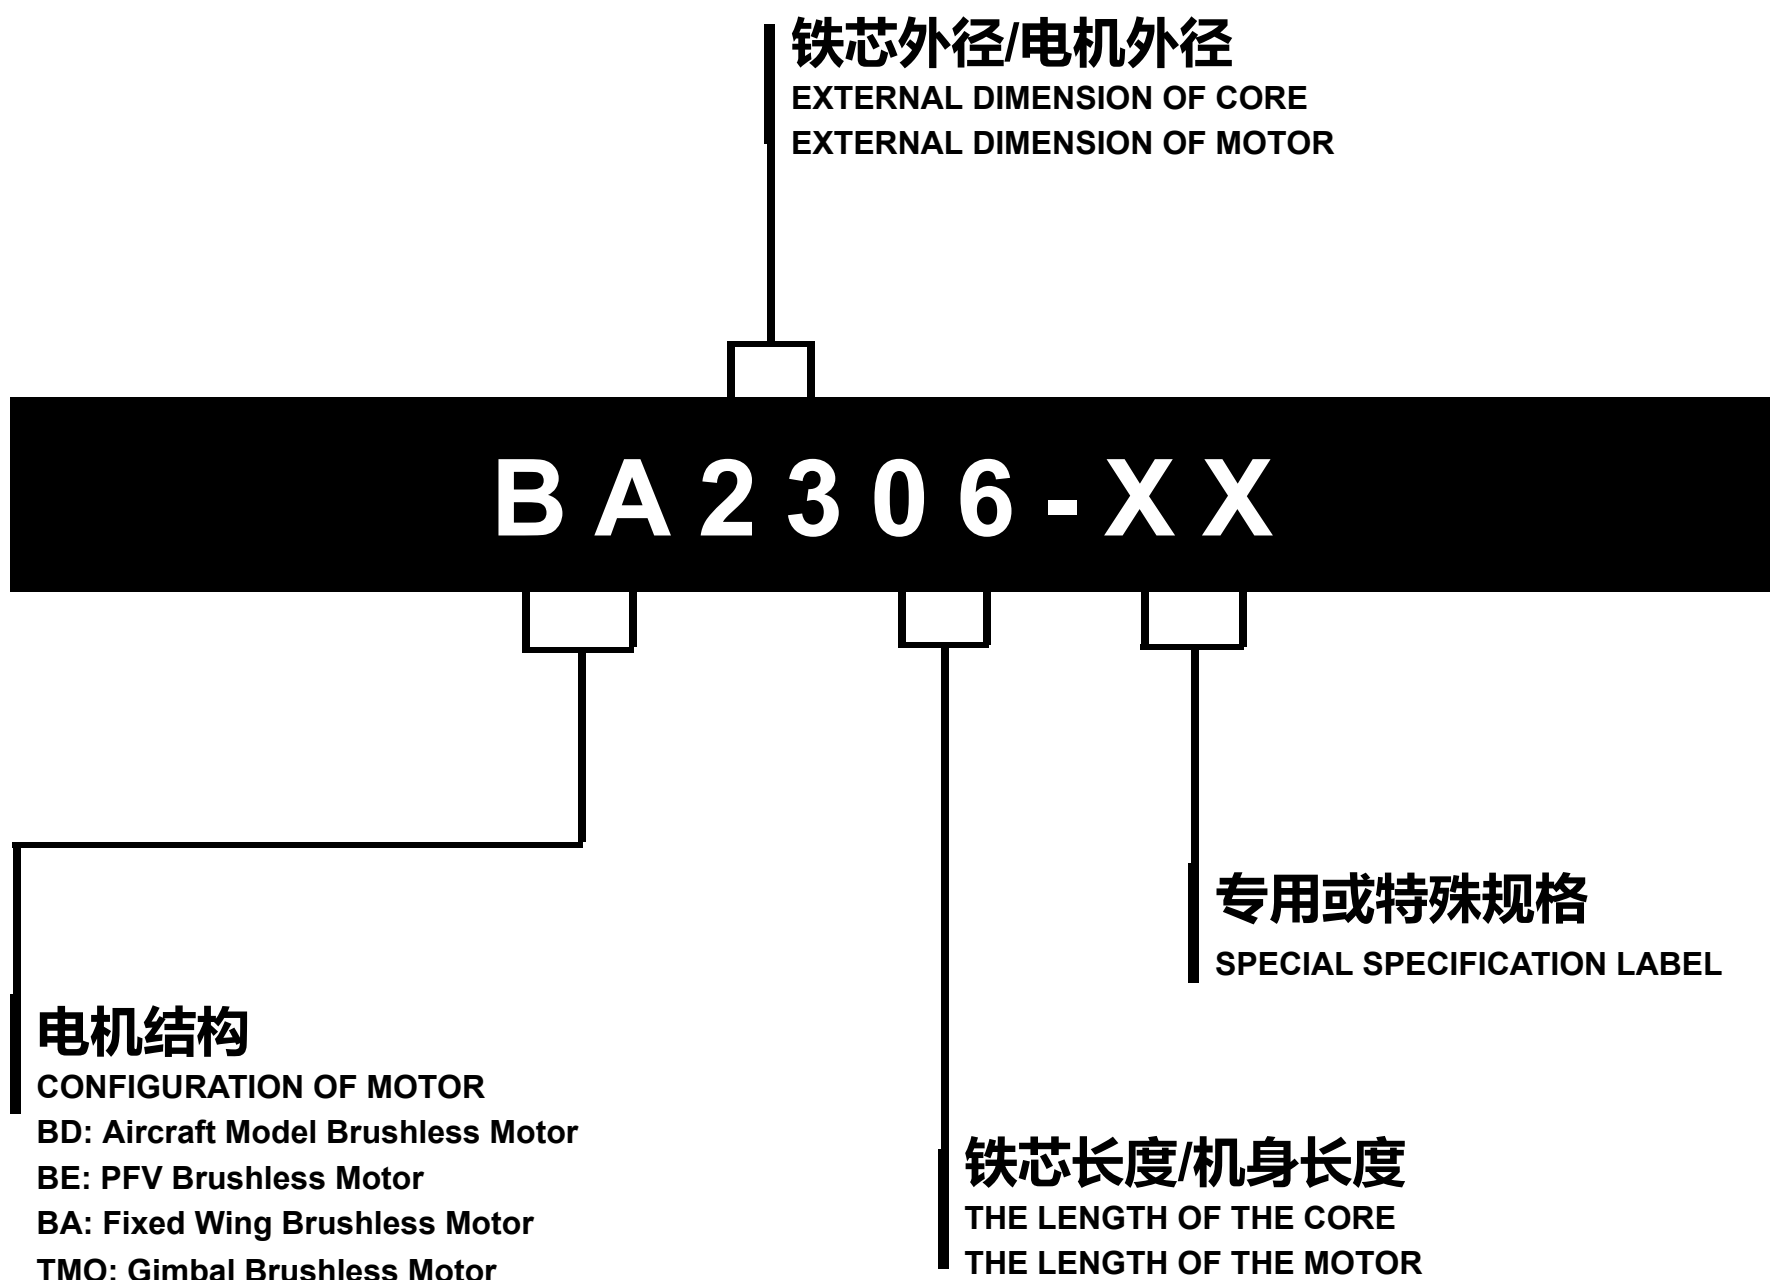

BD2830

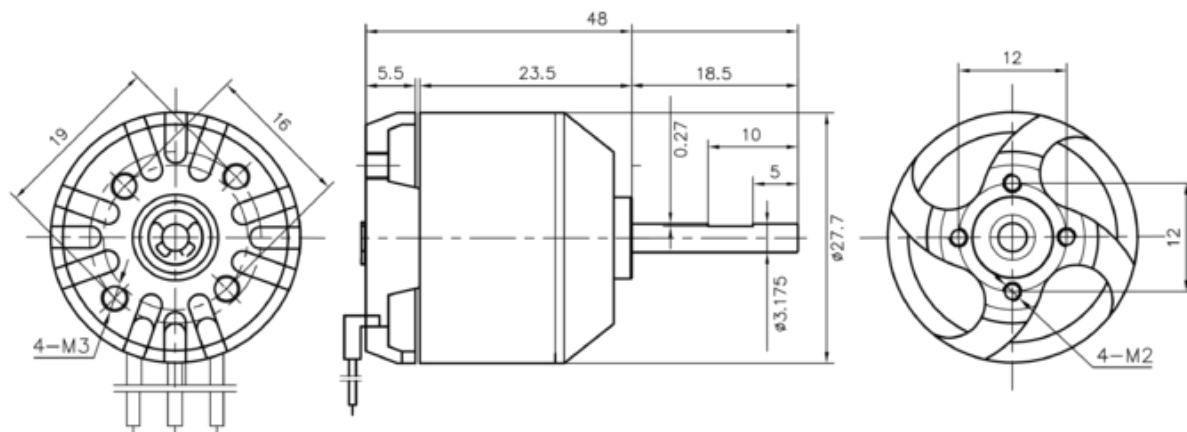


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BD2830-8	1300	30A	275	19	52	2~4S	0.075	930	Φ3.17	Φ28x30
BD2830-11	1000		210	14.5			0.127	890		
BD2830-12	850		185	12.8			0.192	866		
BD2830-14	750		185	12.8			0.192	866		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BD2836-R

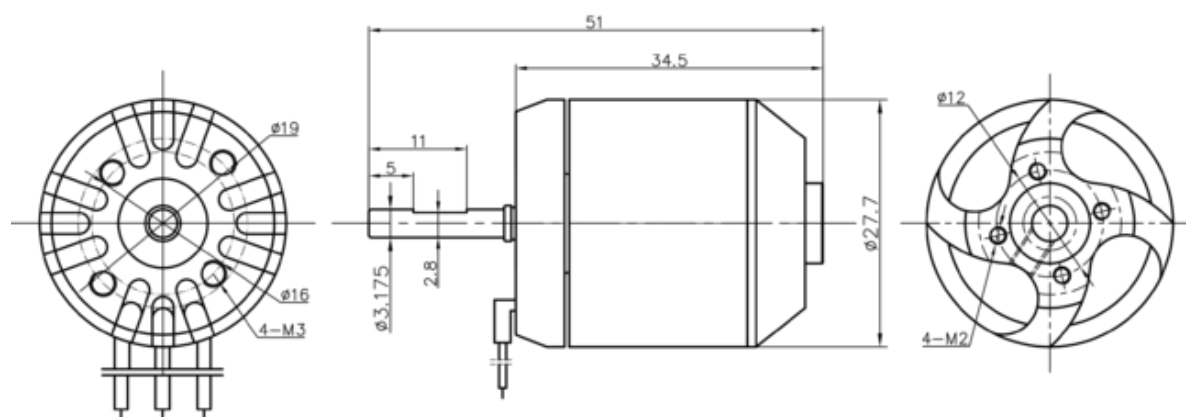


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BD2836-4	4000	40A	480	44.5	66	2~3S	0.125	990	Φ4.0	Φ28x36
BD2836-3	3500		349	32.3			0.158	880		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BD2225-R

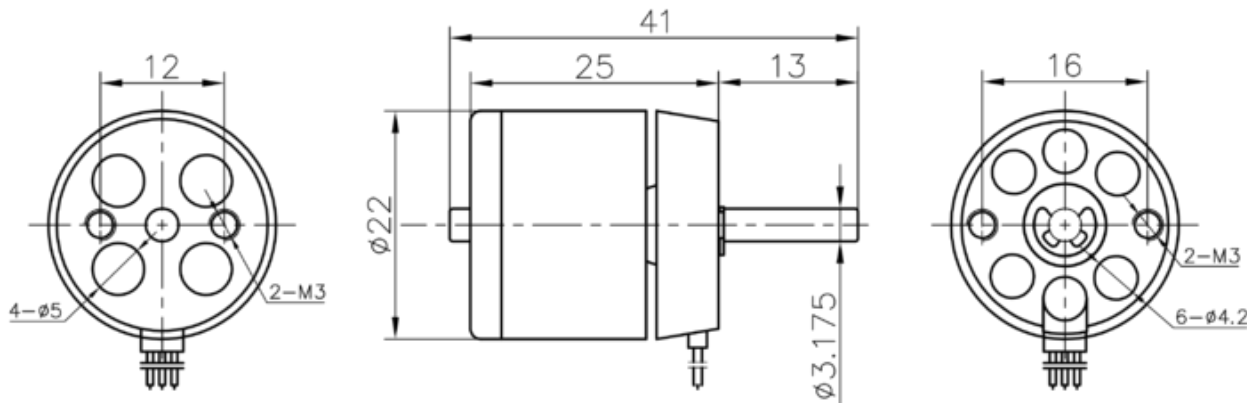


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴经 Shaft Φ	马达尺寸 Motor Size (mm)
BD2225-13	2000		120	11			0.143	450		
BD2225-15	1600	18A	90	10	32	2~3S	0.156	440	$\Phi 3.17$	$\Phi 22 \times 25$
BD2225-19	1350		105	8.2			0.203	340		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BD2812



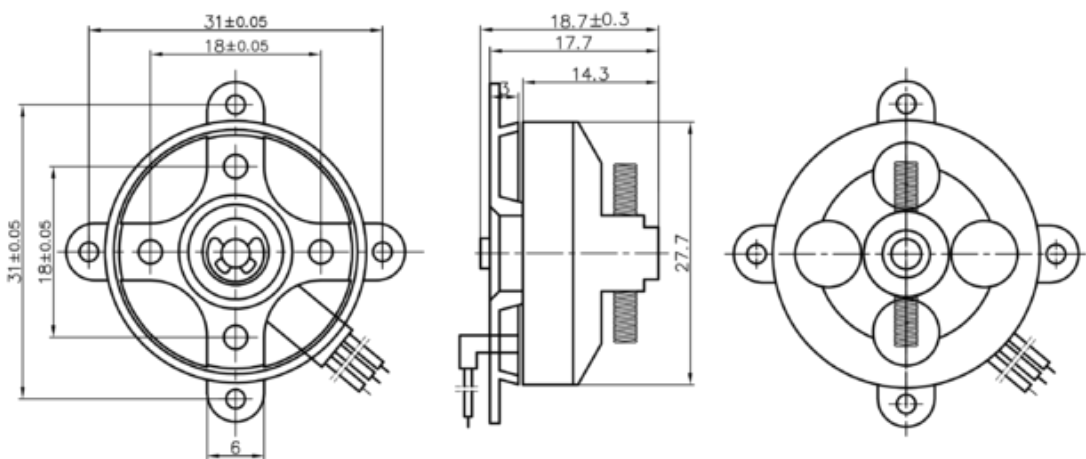


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴经 Shaft Φ	马达尺寸 Motor Size (mm)
BD2812-14	1600	20A	97	12	22	2~3S	0.27	470	$\Phi 3.17$	$\Phi 28 \times 12$

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BD2822-R

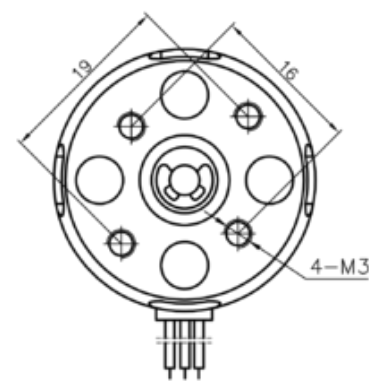
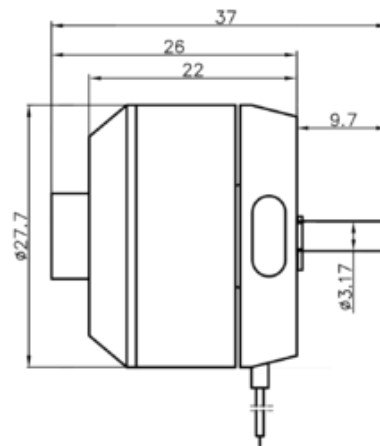



型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BD2822-8	2600	30A	260	24	38	2~3S	0.044	850	Φ3.17	Φ28x22
BD2822-12	1800		180	16.6			0.091	660		
BD2822-14	1450		160	14.8			0.112	550		
BD2822-17	1100		102	9.9			0.192	520		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BD2826

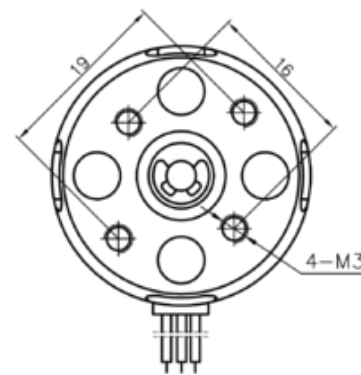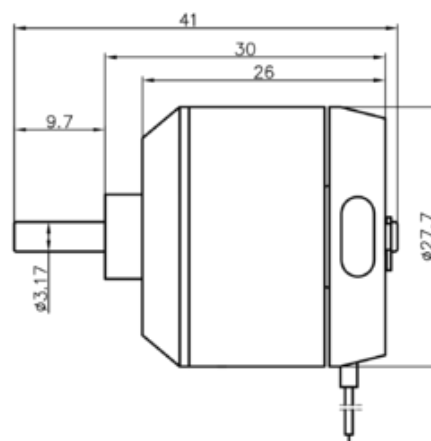


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BD2826-6	2200	40A	342	31.5	50	2~3S	0.044	960	Φ3.17	Φ27.7x26.3
BD2826-10	1400		205	18.9			0.091	780		
BD2826-13	1000		150	13.8			0.112	660		
BD2826-15	930		130	12			0.192	645		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BD2836

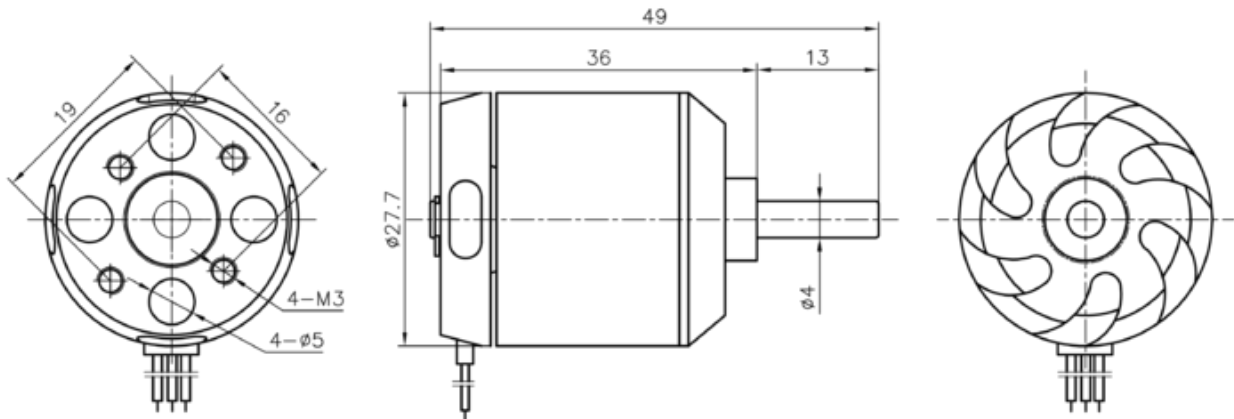


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴经 ShaftΦ	马达尺寸 Motor Size (mm)
BD2836-6	1500	40A	368	25.4	70	2~4S	0.041	1150	Φ4.0	Φ28x36
BD2836-7	1120		336	23.2			0.070	1130		
BD2836-9	880		243	16.8			0.107	850		
BD2836-11	750		206	14.2			0.160	800		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BD3530



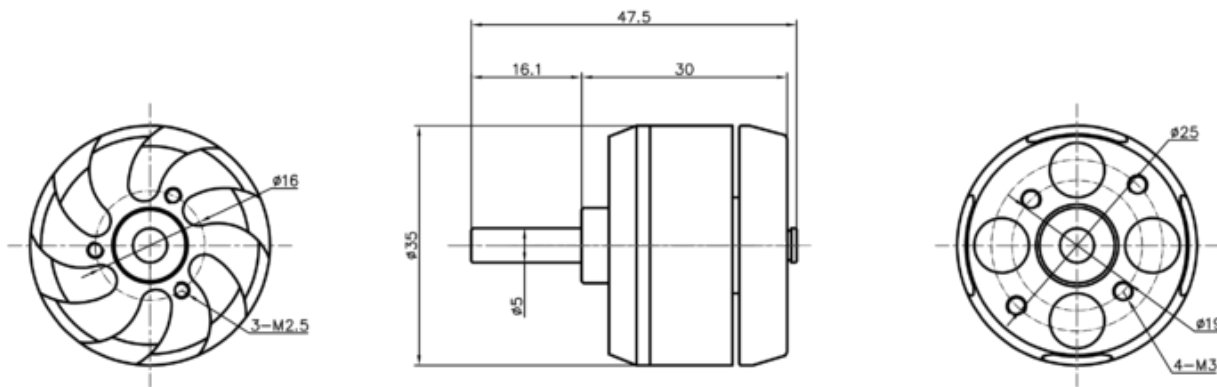


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴经 ShaftΦ	马达尺寸 Motor Size (mm)
BD3530-8	1700	50A	480	33.1	74	2~4S	0.040	1240	Φ5.0	Φ35x30
BD3530-10	1400		446	30.8			0.051	1180		
BD3530-14	1100		313	21.6			0.077	1100		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BD3536

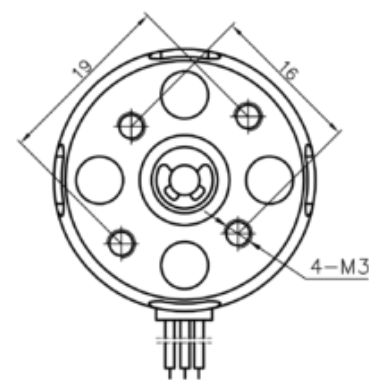
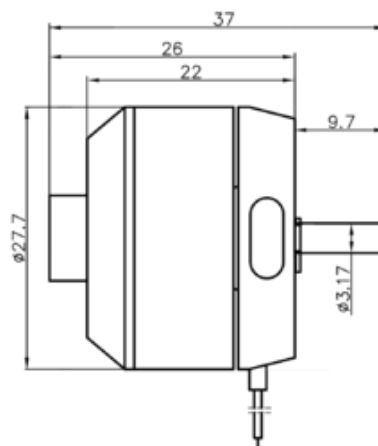



型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BD3536-5	1450	50A	655	45.2	102	2~4S	0.023	1380	Φ5.0	Φ35x36
BD3536-6	1250		496	34.2			0.034	1270		
BD3536-8	1000		432	29.8			0.052	1160		
BD3536-9	910		370	25.5			0.036	1050		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.




BD3542

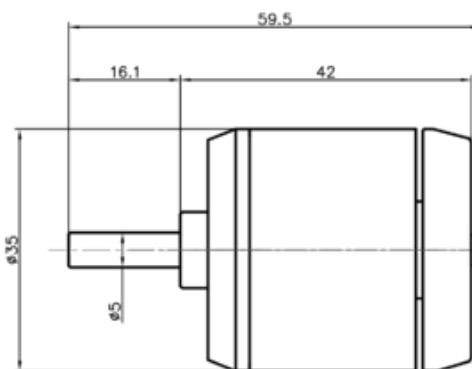

型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BD3542-4	1450	70A	690	47.6	130	2~4S	0.019	1420	Φ5.0	Φ35x42
BD3542-5	1250		664	45.8			0.021	1350		
BD3542-6	1000		543	37.5			0.031	1260		




注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

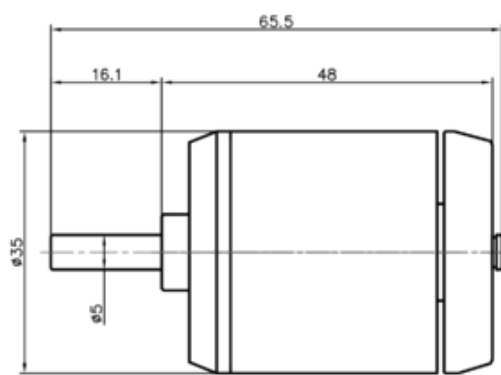

型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴经 ShaftΦ	马达尺寸 Motor Size (mm)
BD3548-4	1100		911	50.3			0.023	2150		
BD3548-5	900	70A	770	42.5	156	3~5S	0.036	1780	Φ5.0	Φ35x48
BD3548-6	790		717	39.6			0.040	1650		



PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

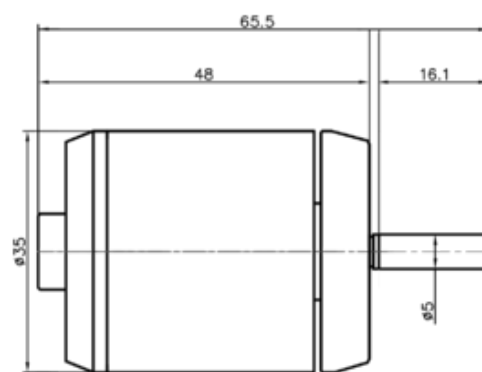

型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴经 ShaftΦ	马达尺寸 Motor Size (mm)
BD3548-4	1100		911	50.3			0.023	2150		
BD3548-5	900	70A	770	42.5	156	3~5S	0.036	1780	Φ5.0	Φ35x48
BD3548-6	790		717	39.6			0.040	1650		

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE1102



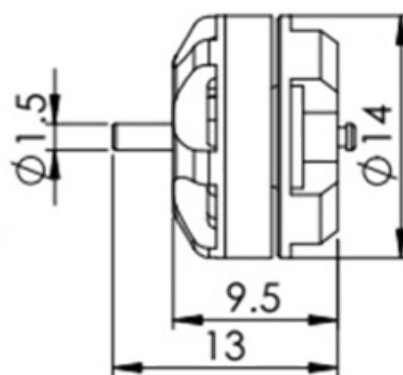


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴经 ShaftΦ	马达尺寸 Motor Size (mm)
BE1102	7800	10A	36	3.2	3.2	2~3S	0.06	74	Φ1.5	Φ14x9.5
BE1102	10000		74	6.7			0.36	120		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE1404

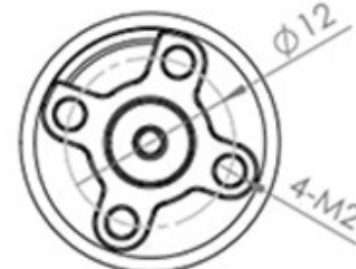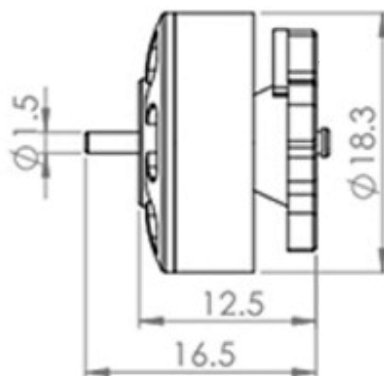


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴经 ShaftΦ	马达尺寸 Motor Size (mm)
BE1404	4300	20A	174.6	11.8	9.37	3~4S	0.28	230	Φ1.5	Φ18.3x12.5
BE1404	6000		215	14.5			0.22	270		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE2208

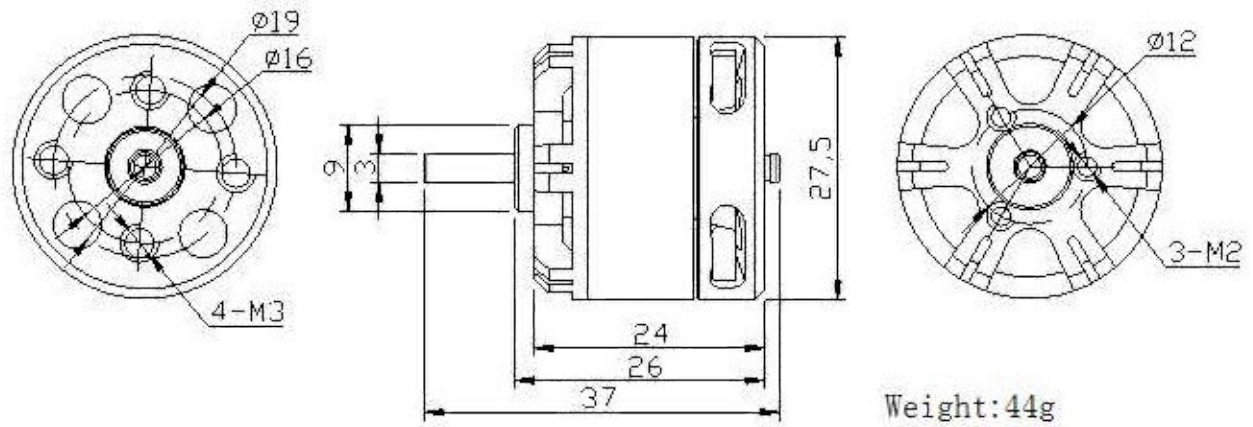


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BE2208-7	2600	40A	478	43.1	44	2~5S	0.044	800	Φ3.0	Φ28x26
BE2208-10	1800	30A	389	26.1			0.085	816		
BE2208-13	1400	30A	384	26			0.106	1060		
BE2208-17	1070	20A	351	19			0.208	1025		

注：电机出轴方向性能参数，颜色可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE2212

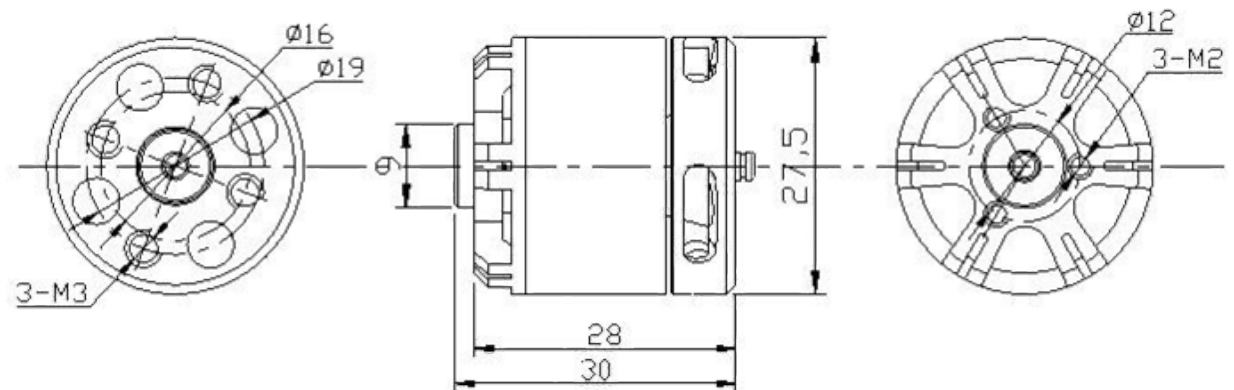


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BE2212-11	1000	20A	216	14.6	66	3~4S	0.032	1000	Φ3.0	Φ28x30
BE2212-13	880		254	17.2			0.067	1000		

注：电机出轴方向性能参数，颜色可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE2217

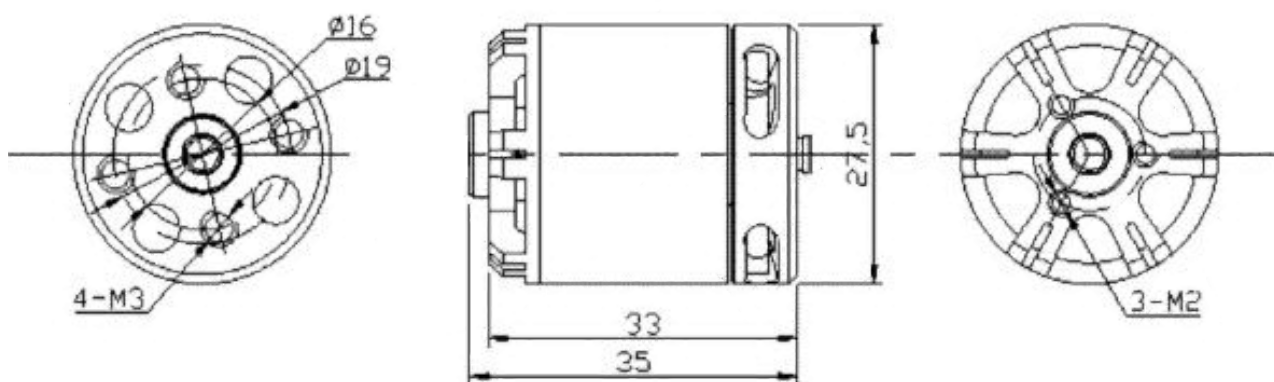


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 Shaft Φ	马达尺寸 Motor Size (mm)
BE2217-9	930	20A	234	21.1	80	3~4S	0.131	1040	$\Phi 4.0$	$\Phi 28 \times 36$
BE2217-10	800		178	16.1			0.131	1200		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE2808(3530)



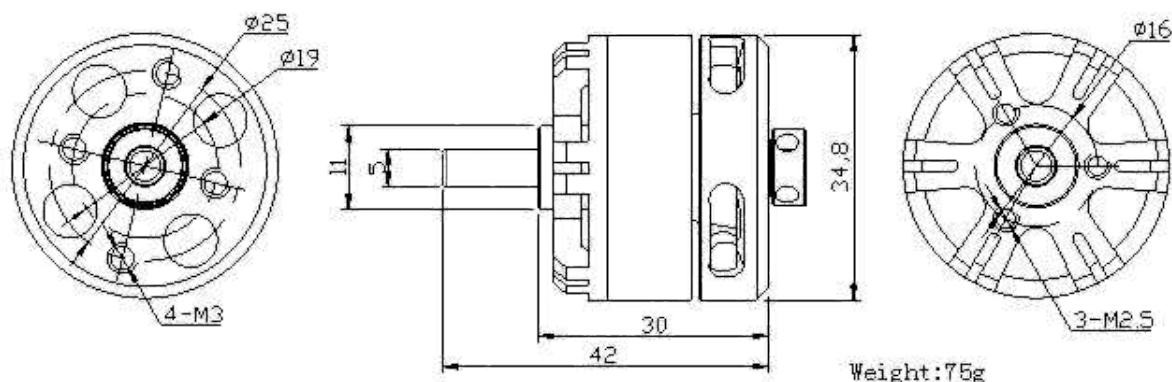


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 Shaft Φ	马达尺寸 Motor Size (mm)
BE2808-8	1760	40A	535	36.2	75	3~6S	0.033	1390	$\Phi 5.0$	$\Phi 35 \times 30$
BE2808-10	1400		529	34			0.045	1500		
BE2808-13	1080		523	23.6			0.081	1430		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE2814(3536)

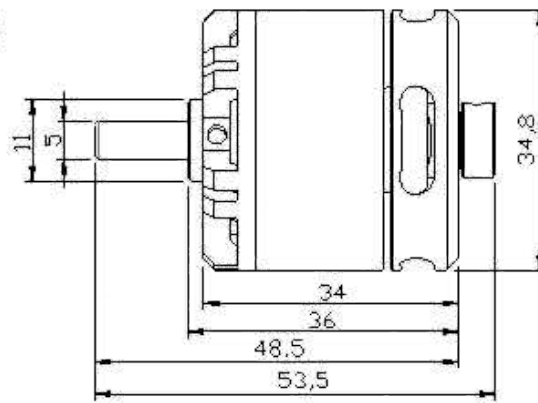



Weight: 100g

型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BE2814-8.5	910	40A	759	34.2	100	3~6S	0.061	1990	Φ5.0	Φ35x36
BE2814-8	980	40A	797	35.9			0.038	1710		
BE2814-6	1280	40A	596	38.5			0.022	1610		
BE2814-5	1400	40A	633	42.8			0.015	1390		


注：电机出轴方向性能参数，颜色可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE2820(3542)

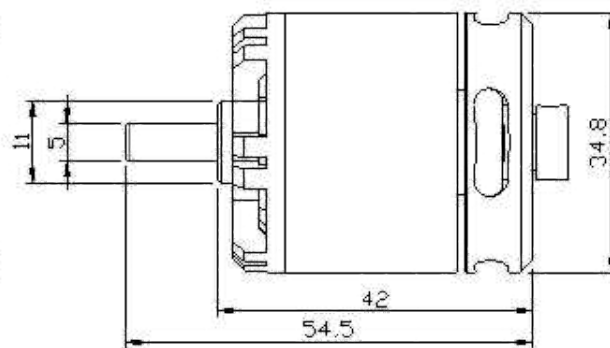

Weight: 131g




型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BE2820-4	1340	40A	740	40	131	3~6S	0.015	1820	Φ5.0	Φ35x42
BE2820-4.5	1200		575	31.1			0.018	1610		
BE2820-5.5	970	30A	586	26.4			0.018	1630		

注：电机出轴方向性能参数，颜色可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE2826(3548)

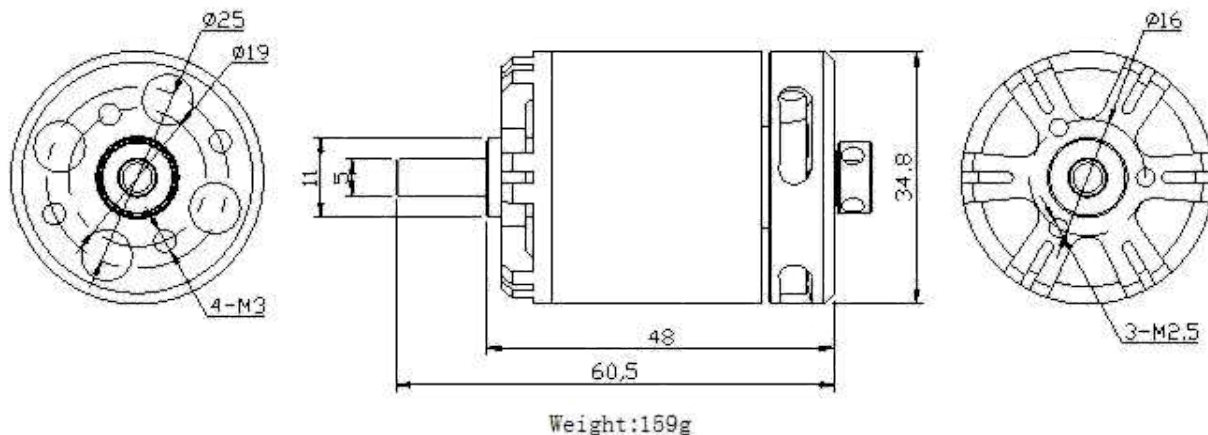


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BE2826-4	1060		817	44.2			0.018	2120		
BE2826-4.5	940	40A	543	24.5	159	3~6S	0.021	1580	Φ5.0	Φ35x48
BE2826-5.5	770		825	37.2			0.034	2820		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE3506

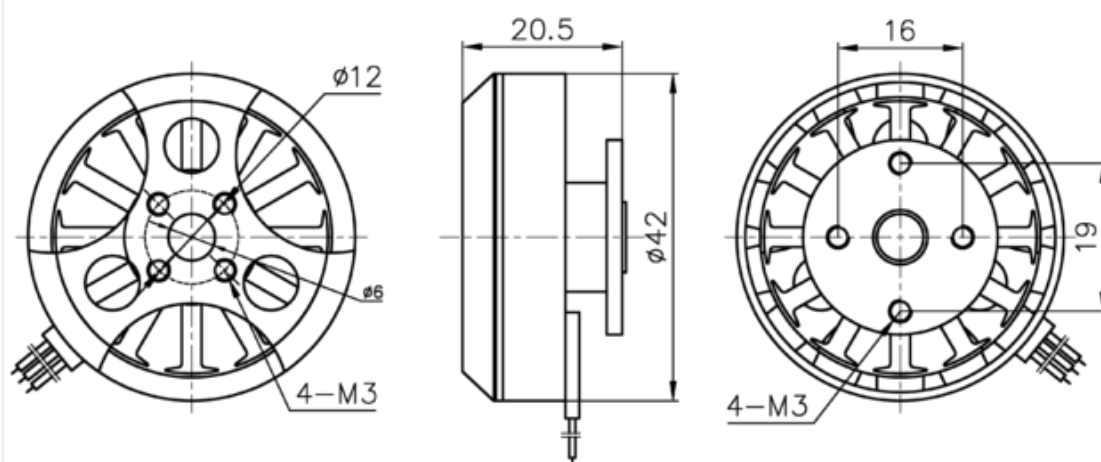


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
BE3506	79KV	18V	1.584W	0.09A	58g	Φ42x20.5	11.9	Φ12



注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE3608



WEIGHT: 83g (APPROX)



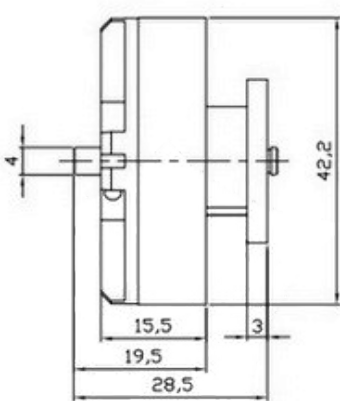


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴经 ShaftΦ	马达尺寸 Motor Size (mm)
BE3608-15	460	30A	450	20.3	83	3~6S	0.128	2103	Φ4.0	Φ42x15
BE3608-11	630	40A	700	31.2			0.076	2369		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE4010


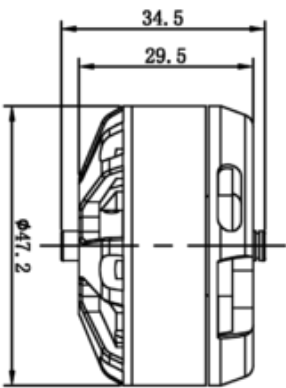
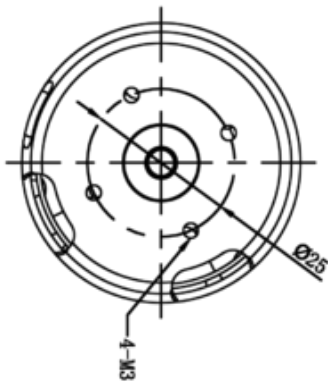


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴经 ShaftΦ
BE4010	348KV	12V	5.48W	0.45A	155g	Φ47.2x29.5	0.26	Φ3.0

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE4108(4625)

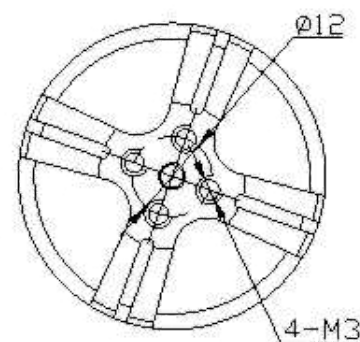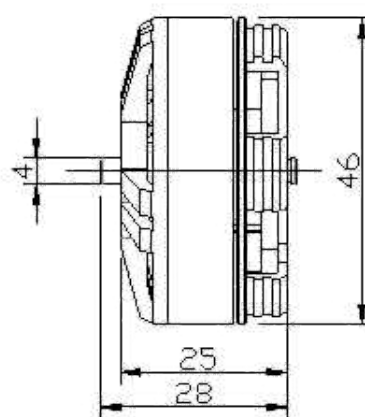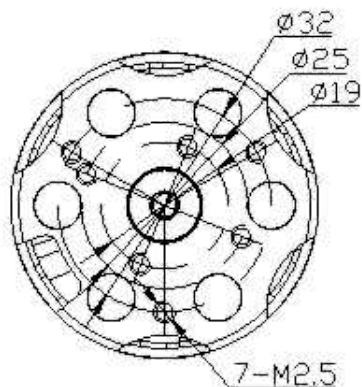


WEIGHT: 113g (APPROX)

型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BE4108-8	720	30A	666	30	113	3~6S	0.055	2200	Φ4.0	Φ46x25
BE4108-10	580	40A	821	37			0.098	2000		
BE4108-12	480	30A	599	27			0.125	2450		
BE4108-15	380	20A	381	17.2			0.193	2080		



注：电机出轴方向性能参数，颜色可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE4215

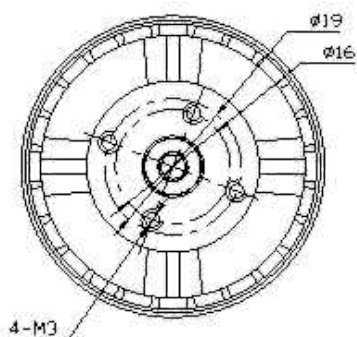

WEIGHT: 83g (APPROX)

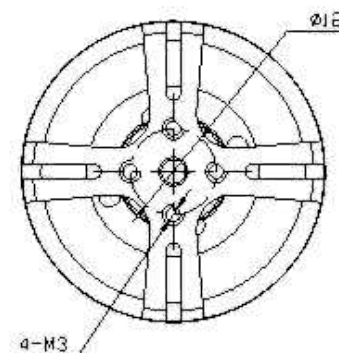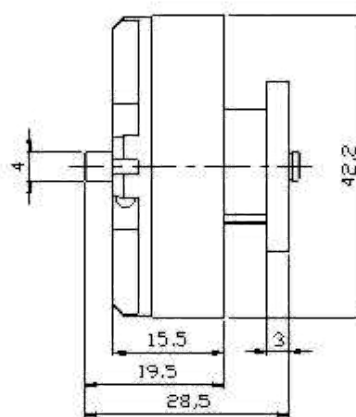


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BE4215-21	650	40A	865	39	83	3~6S	0.110	2290	Φ4.0	Φ42x15

注：电机出轴方向性能参数，颜色可依客户要求做调整，详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE4250

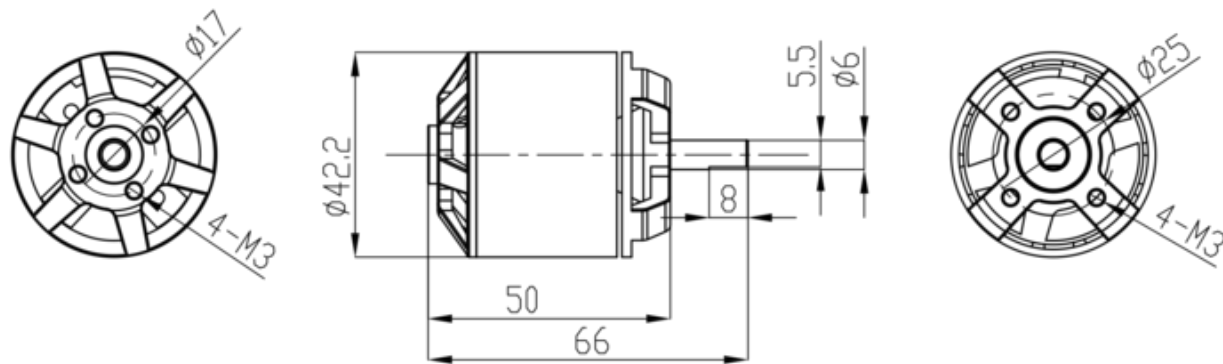


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
BE4250	600KV	12V	20.8W	2.52A	214g	Φ50x42.2	0.024	Φ17

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BE5208(6325)

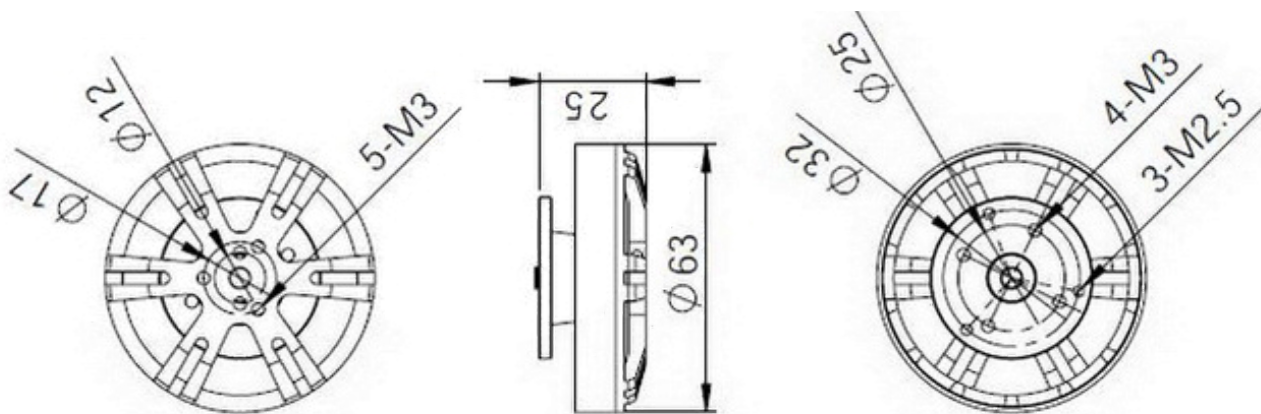


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BE5208-25	330	30A	626	28.2	200	3~6S	0.106	3300	Φ5.0	Φ63x30

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BA0703


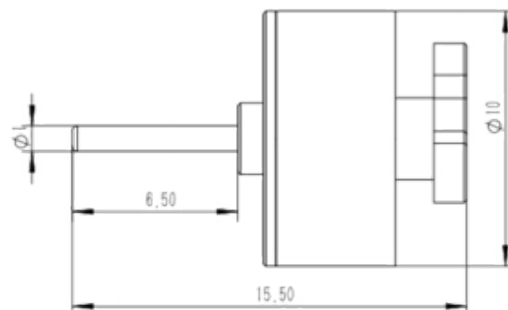


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BA0703	10000	7A	18	2.4	2.13	1~2S	0.59	35	Φ1.5	Φ10x9

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BA1104(1412)

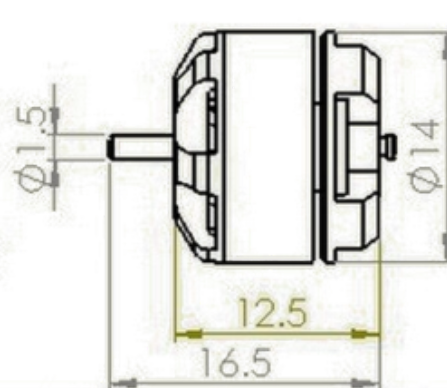


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BA1104	4000	20A	81.4	5.5	6.0	2~3S	0.54	190	Φ1.5	Φ14x12.5
BA1104	7500	10A	131	11.8			0.19	220		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BA1306(1814)

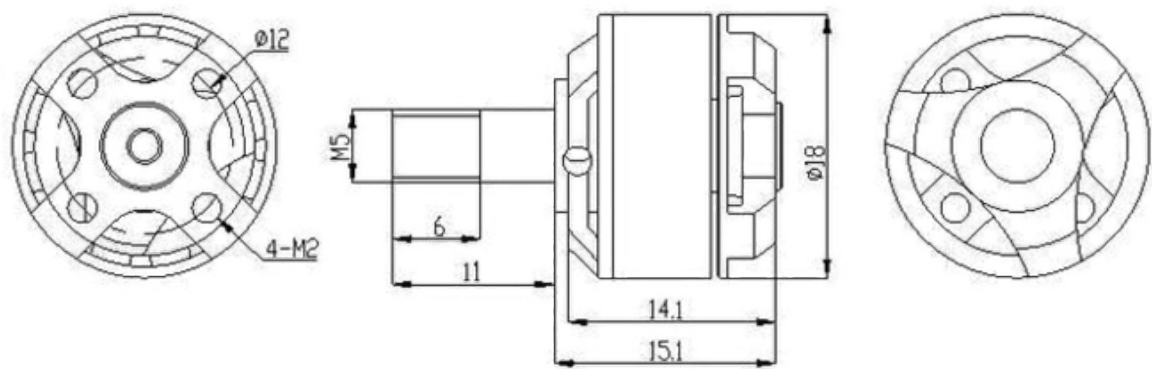


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴经 ShaftΦ	马达尺寸 Motor Size (mm)
BA1306-23	2300	10A	63	5.7			0.60	220		
BA1306-17	3100	10A	104.3	7.9	12	2~4S	0.55	230	M5	Φ18x15.1
BA1306-14	4000	20A	158.4	20			0.15	370		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BA1407(1816)

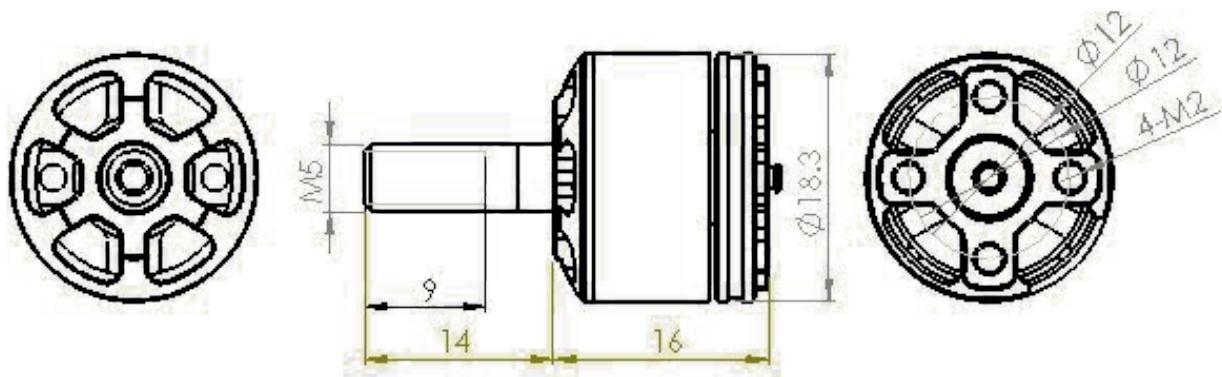


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴经 ShaftΦ	马达尺寸 Motor Size (mm)
BA1407	4300	30A	368	24.2	14.66	3~4S	0.36	350	Φ3.0	Φ18.3x16

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BA1804(2313)

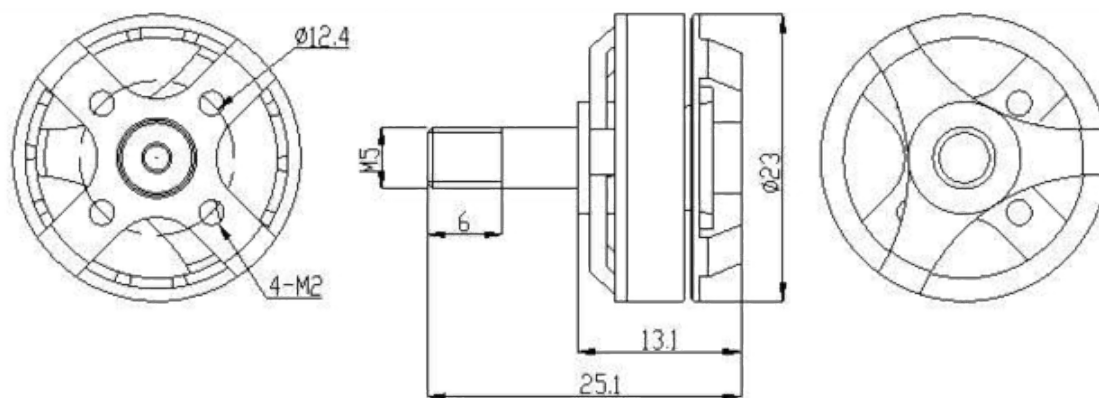


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BA1804	2300	10A	92.1	8.3	16	2~3S	0.61	320	M5	Φ23x25.1
BA1804	2000		55.5	5			0.61	280		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BA1806(2318)

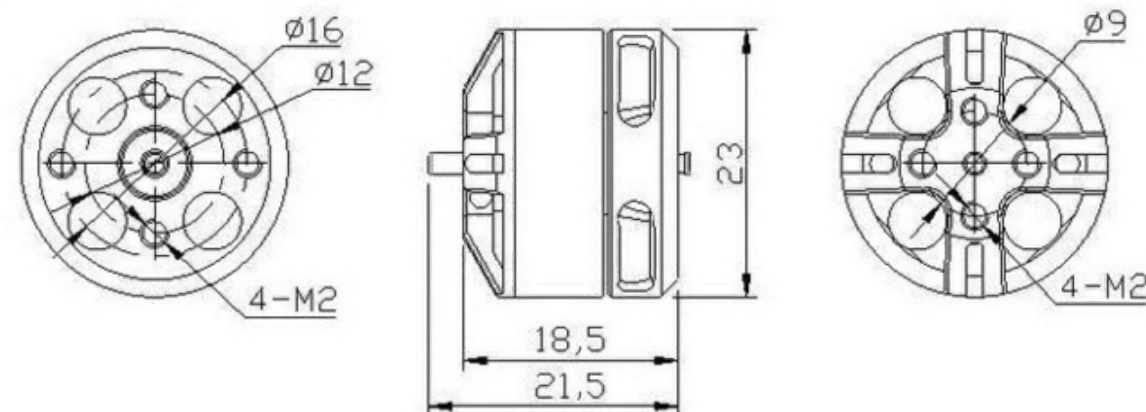


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BA1806	2300	20A	84.4	19	22	3~4S	0.19	630	M5	Φ23x17.5
BA1806	2700		256	17.3			0.12	690		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.


BA1812

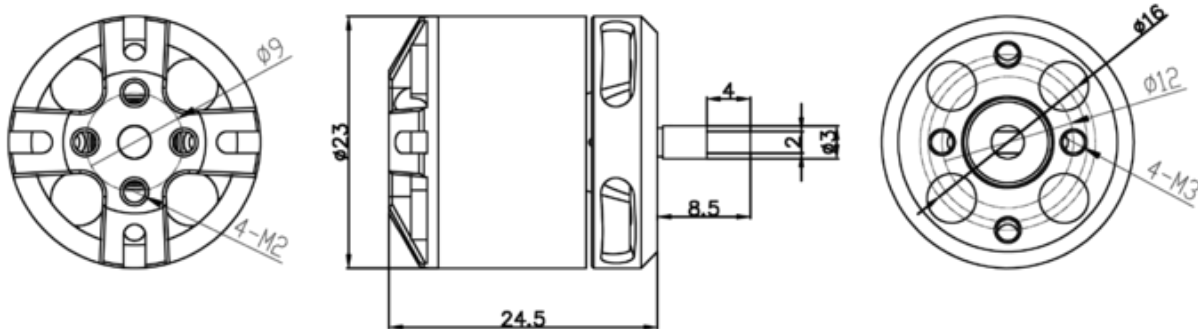

型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
BA1812	2300KV	10V	10.85W	1.12A	32.7g	Φ24.5x23	0.1	Φ9.0

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。
PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.



BA2205(2818)

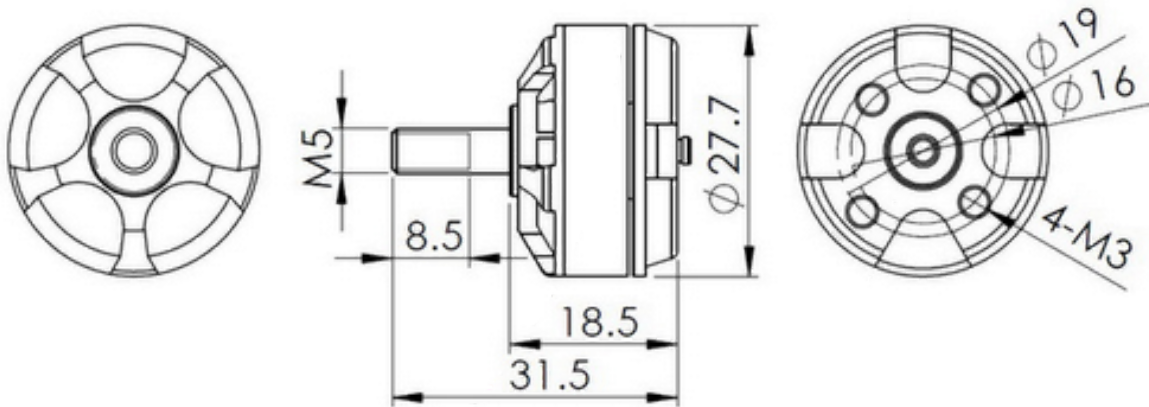

型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BA2205	2300	20A	428.8	26.8	30	3~6S	0.06	1070	M5	Φ27.7x19
BA2205	2550	30A	411.4	27.8			0.08	1020		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。
PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BA2206

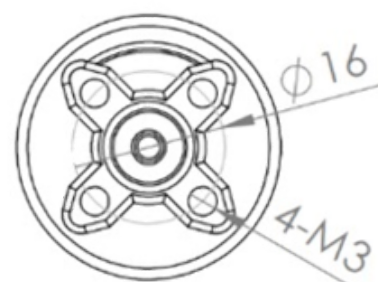
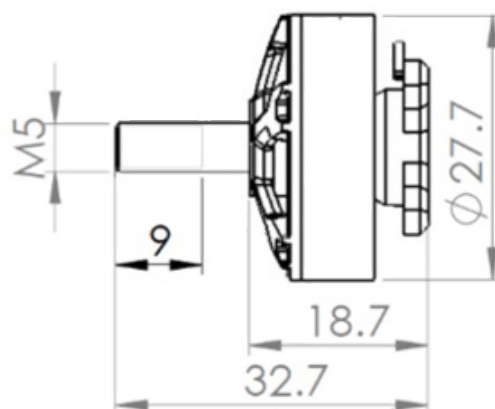


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BA2206	2400	20A	523.2	32.7	31.15	3~6S	0.07	1000	M5	Φ27.7x18.7
BA2206	2700	30A	691.2	43.2			0.06	1140		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BA2207

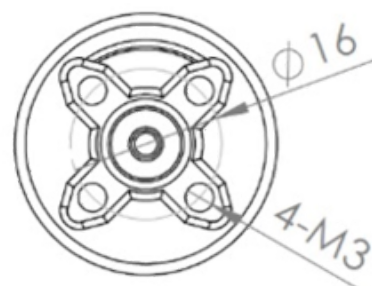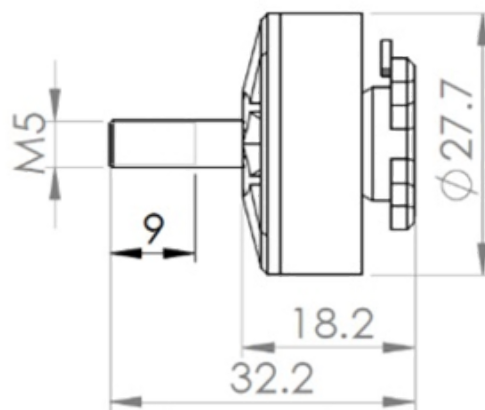


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 ShaftΦ	马达尺寸 Motor Size (mm)
BA2207	2300	30A	579	36.2	34.71	3~6S	0.06	1100	M5	Φ27.7x18.2
BA2207	2600		704	44			0.05	1140		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BA2306

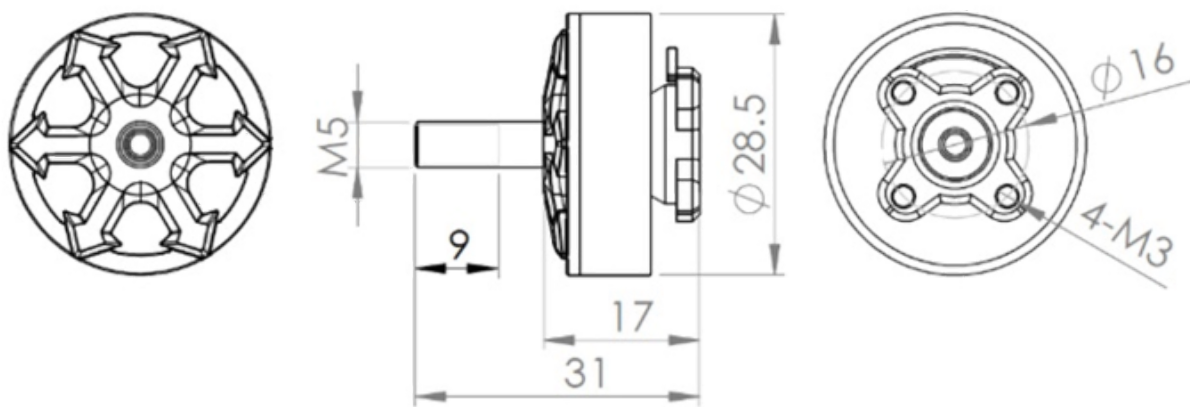


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴经 ShaftΦ	马达尺寸 Motor Size (mm)
BA2306	2500	30A	705.6	44.1	33.59	3~6S	0.06	1200	M5	Φ28.5x17
BA2306	2800		672	42			0.05	1100		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BA6007

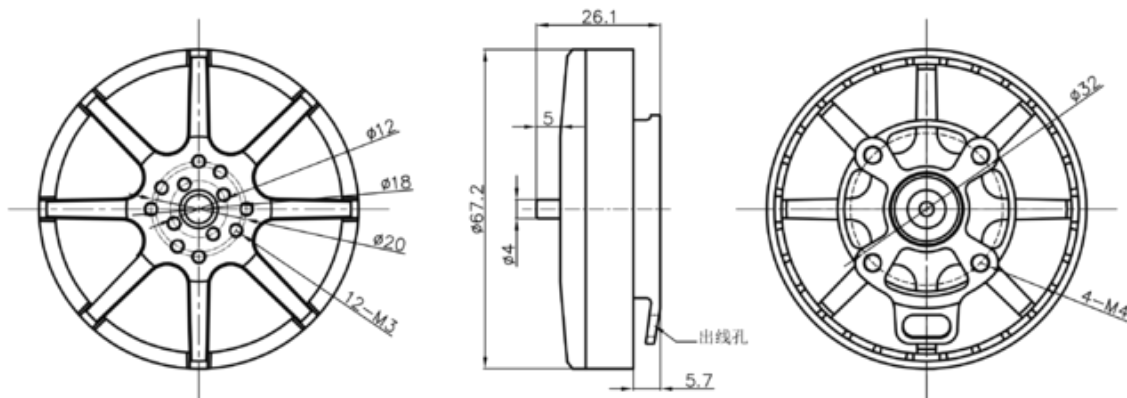


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴经 ShaftΦ
BA6007	160KV	18V	7.542W	0.42A	156g	Φ67.2x26.1	0.27	Φ5.0

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

BA8108

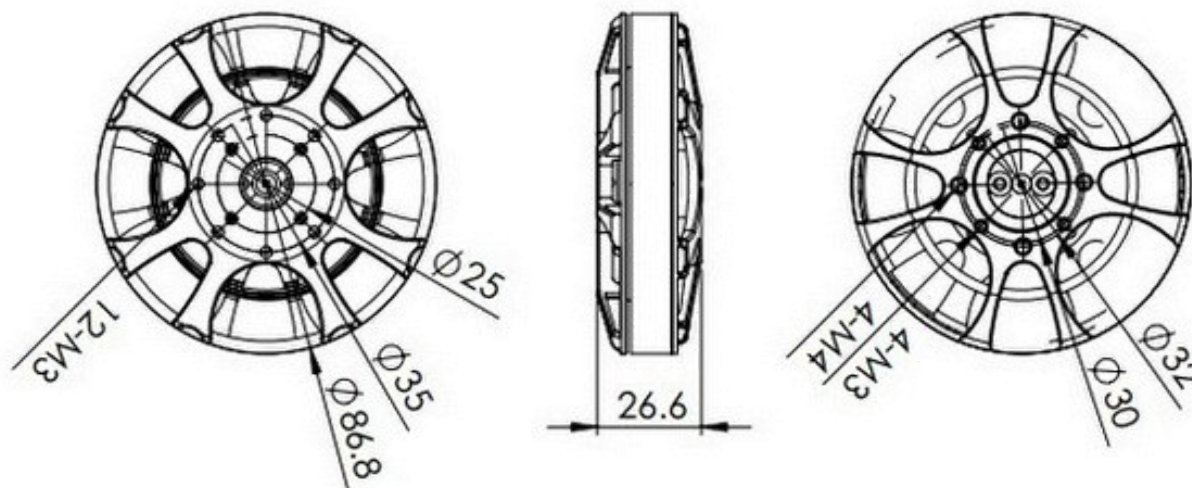


型号 MODEL	KV值 RPM/KV	电调 ESC	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	电池节数 Battery Lipo cells	电阻 RI(Ω)	拉力 Pull(g)	轴径 Shaft Φ	马达尺寸 Motor Size (mm)
BA8108-16	100	24A	215	8.6	240	6~12S	0.18	2600	$\Phi 8.0$	$\Phi 86.8 \times 26.6$
BA8108-12	135	30A	407	16.3			0.14	3750		

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM1806(2318)


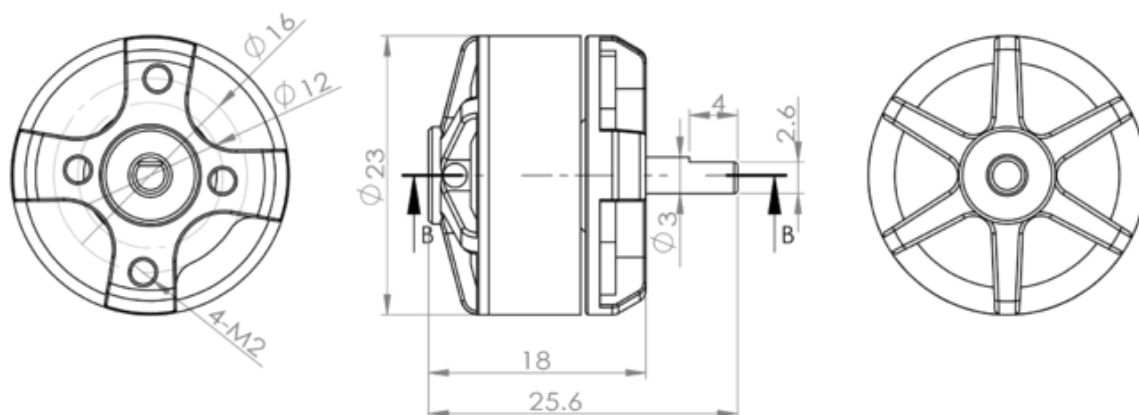


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 Shaft Φ
TM1806(2318)	1600KV	12V	5.2W	0.44A	18.9g	$\Phi 23 \times 18$	0.30	$\Phi 3.0$

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM2212(2830)


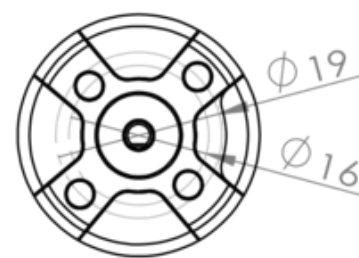
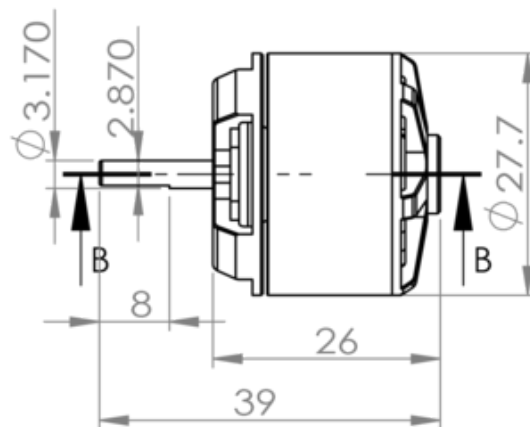


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TM2212(2830)	16000KV	12V	20.68W	1.8A	47.8g	Φ27.7x26	0.07	Φ3.17

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM3536

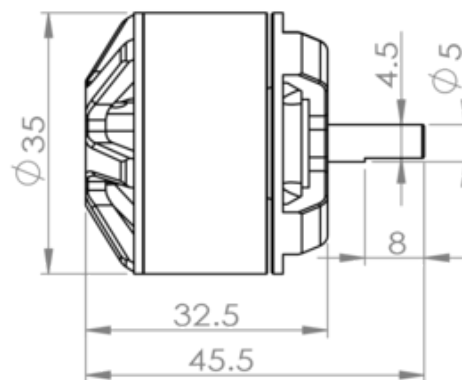


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TM3536	950KV	12V	15.38W	1.3A	90.9g	Φ35x32.5	0.065	Φ5.0

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

HB3536

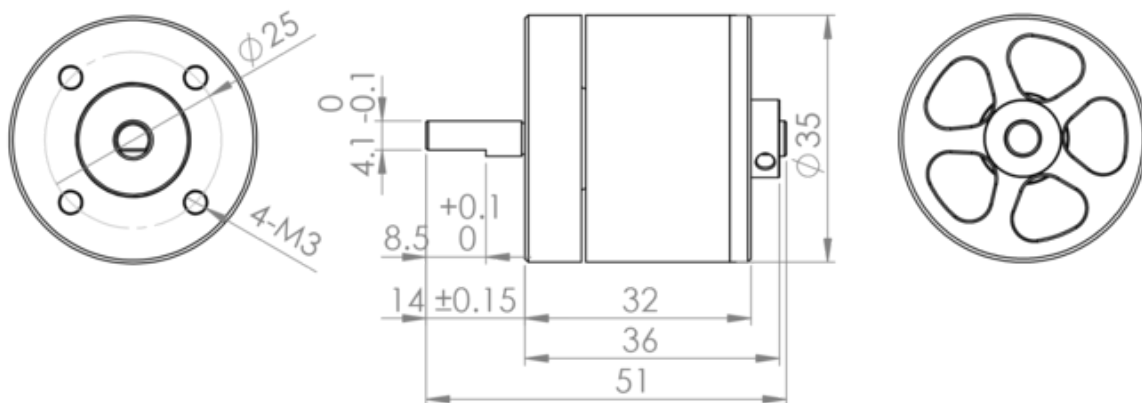


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 Shaft Φ
HB3536	181KV	12V	1.584W	0.13A	111.7g	$\Phi 35 \times 36$	1.17	$\Phi 5.0$

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM4250

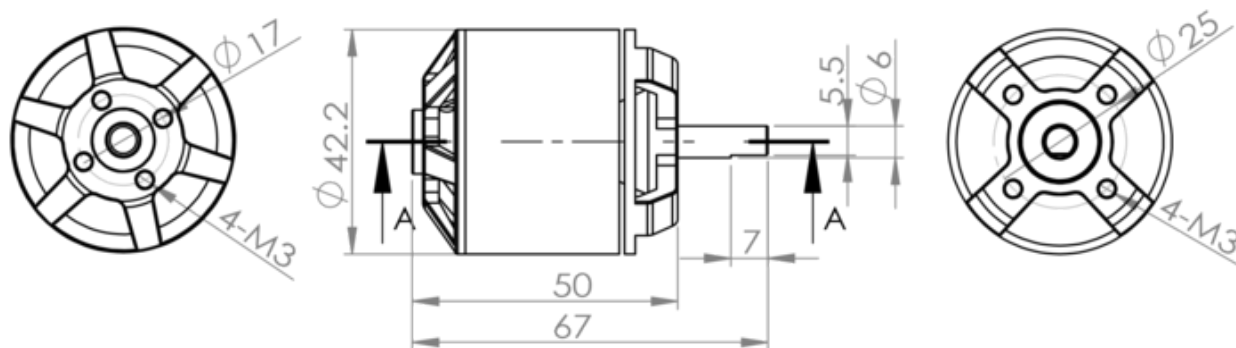


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 Shaft Φ
TM4250	700KV	12V	29.7W	2.5A	218.2g	$\Phi 42.2 \times 50$	0.024	$\Phi 6.0$

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM8016

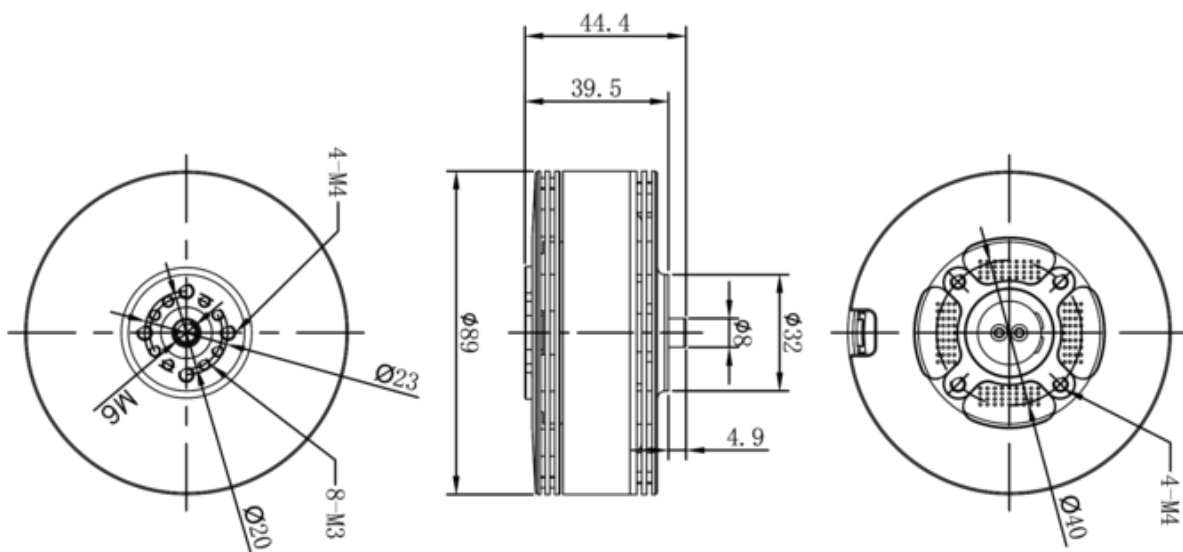


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 Shaft Φ
TM8016	101KV	12V	6.64W	0.55A	510.46g	$\Phi 89 \times 39.5$	0.20	$\Phi 8.0$

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM8108



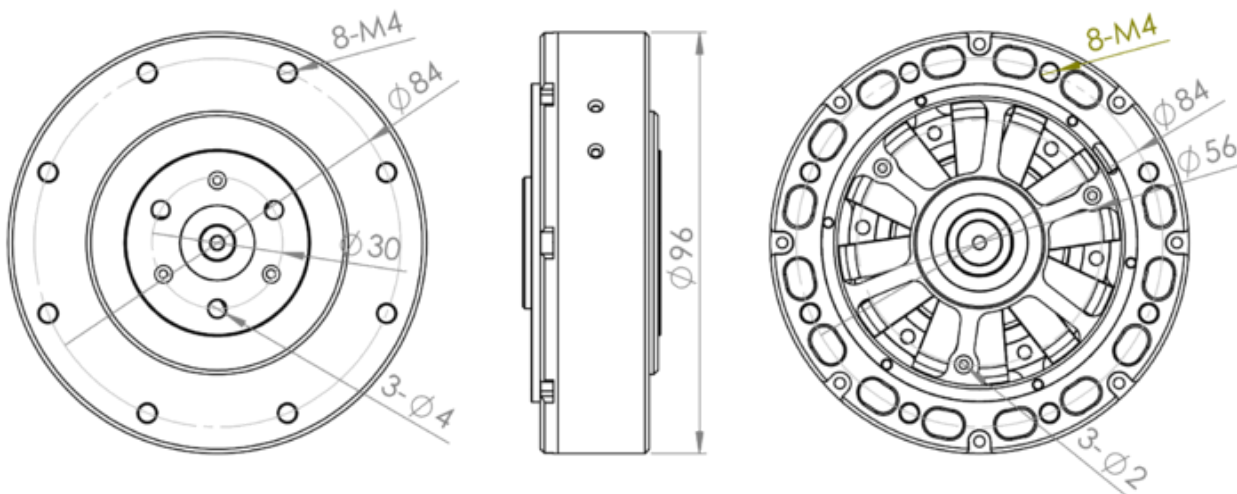


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 Shaft Φ
TM8108	41KV	18V	4.12W	0.23A	598.81g	$\Phi 67.2 \times 26.1$	0.28	$\Phi 15.0$

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM2807


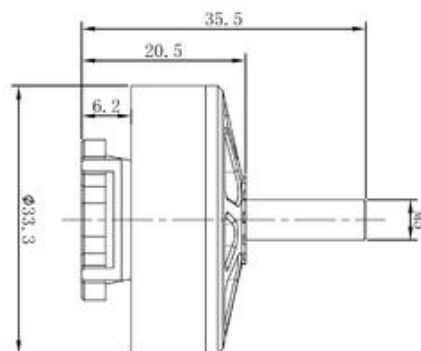



型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TM2807	1300KV	3~6S	1085W	45.2A	48g	Φ33.3x35.5	51mΩ	M5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM2810

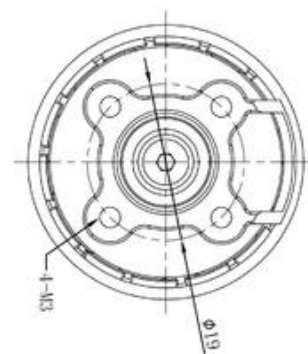
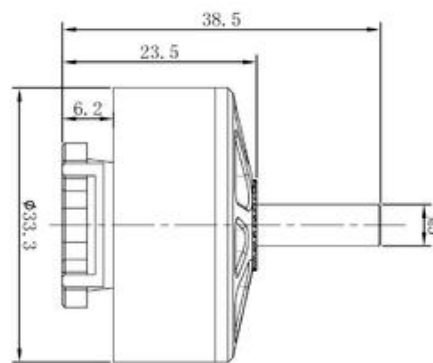



型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TM2810	900KV	3~6S	1070W	44.6A	57g	Φ33.3x38.5	83mΩ	M5
TM2810	1180KV	3~6S	1512W	63A	57g	Φ33.3x38.5	39mΩ	M5
TM2810	1250KV	3~6S	1416W	59A	57g	Φ33.3x38.5	50mΩ	M5
TM2810	1350KV	3~6S	1116W	46.5A	57g	Φ33.3x38.5	46mΩ	M5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM2812

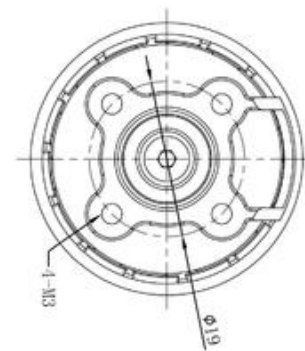
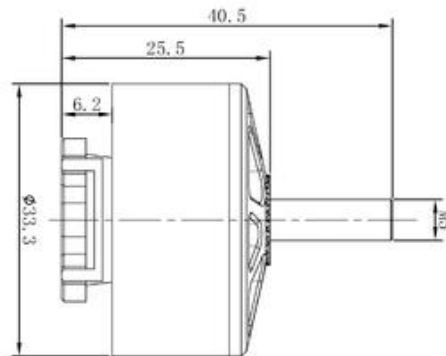



型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TM2812	900KV	3~6S	1188W	49.5A	67g	Φ33.3x40.5	61mΩ	M5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM3110

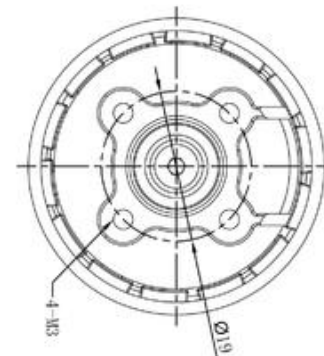
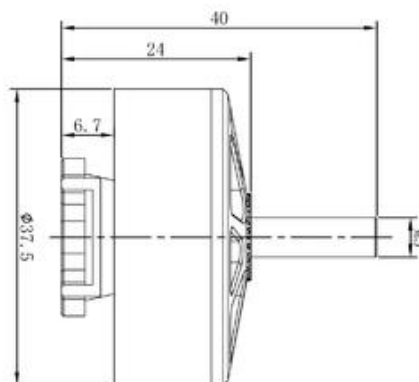



型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TM3110	900KV	3~6S	1469W	61.2A	76g	Φ37.5x40	55mΩ	M5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM3112

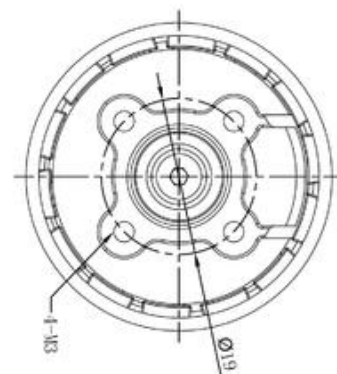
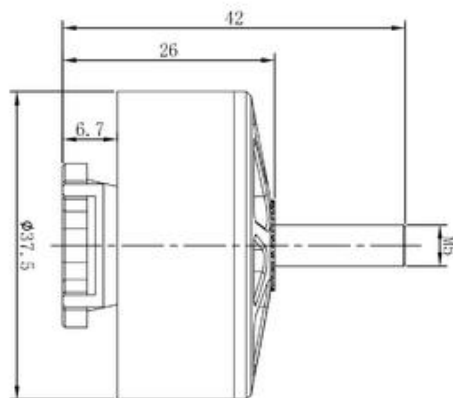



型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TM3112	900KV	3~6S	1454.4W	60.6A	86g	Φ37.5x42	55mΩ	M5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM3115

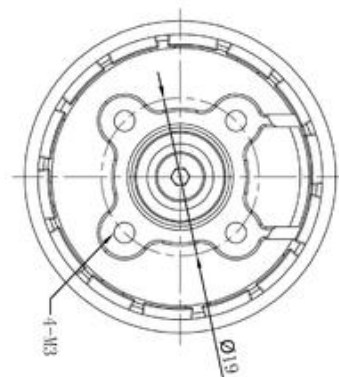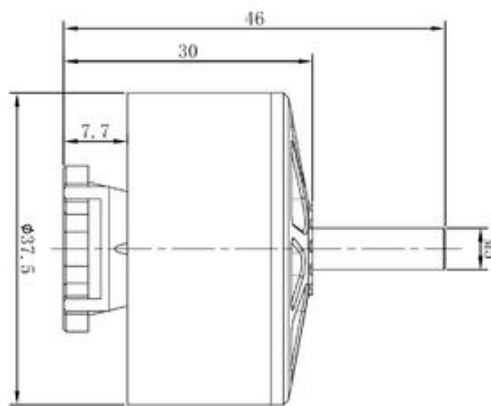


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TM3115	900KV	3~6S	1612.8W	67.2A	100g	Φ37.5x45	35mΩ	M5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM3512

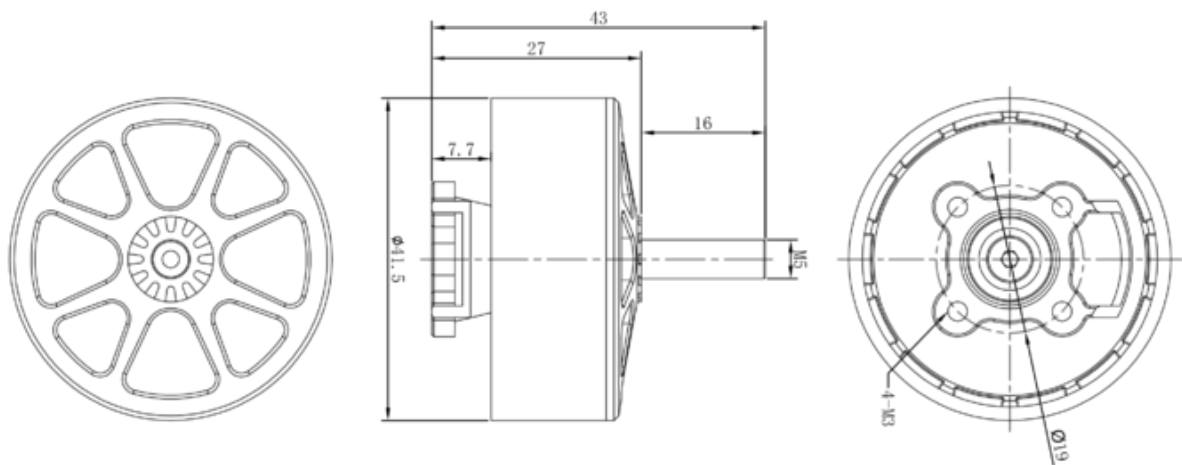


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴经 ShaftΦ
TM3512	900KV	3~6S	1656W	69A	112g	Φ41.5x43	25mΩ	M5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM3515


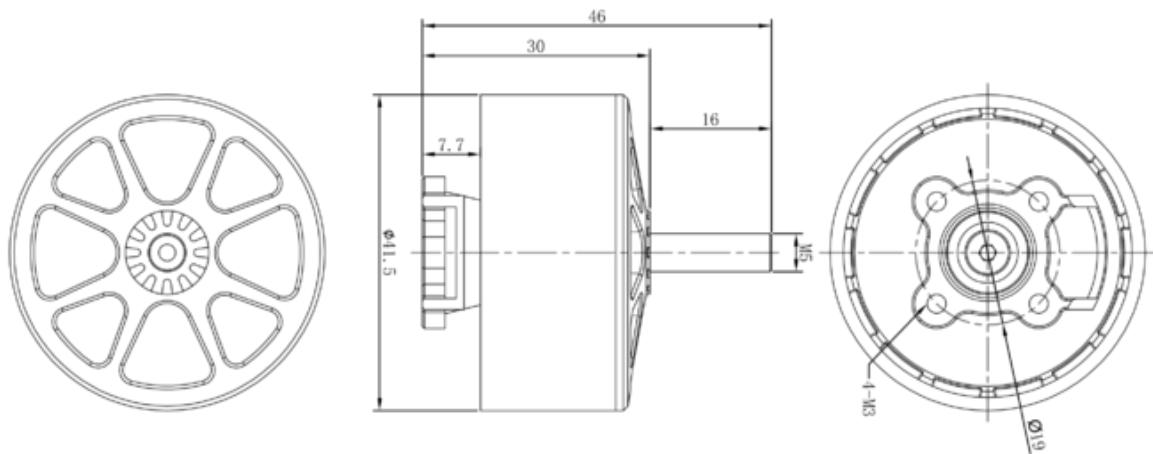


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴经 ShaftΦ
TM3515	900KV	3~6S	1623W	68A	132g	Φ41.5x46	23mΩ	M5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM2627

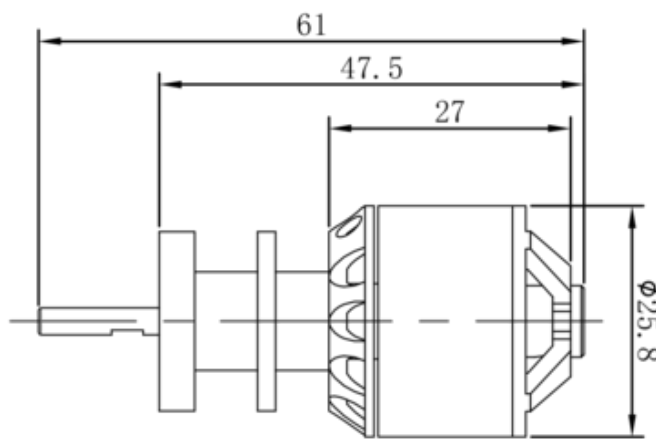


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TM2627	4500KV	3~4S	769W	45.8A	53.8g	Φ25.8x47.5	36mΩ	3mm

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM2840



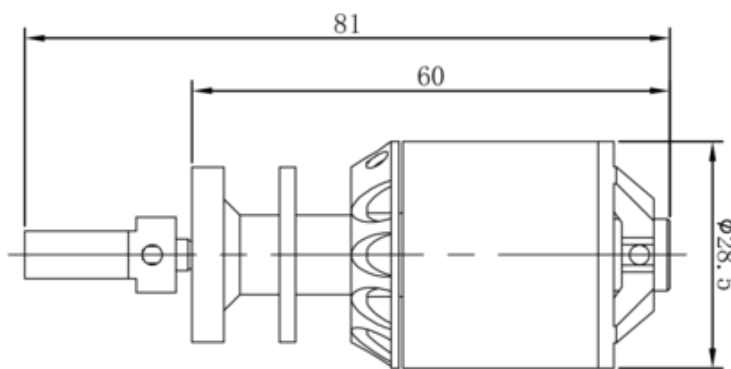


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TM2840	2300KV	3~6S	1140W	47.5A	95.5g	Φ28.5x60	35mΩ	4mm
TM2840	2800KV	3~6S	712W	42.4A	95.5g	Φ28.5x60	32mΩ	4mm
TM2840	3200KV	3~6S	1053W	62.7A	95.5g	Φ28.5x60	23mΩ	4mm
TM2840	3500KV	3~6S	582W	46.2A	95.5g	Φ28.5x60	20mΩ	4mm

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM4214

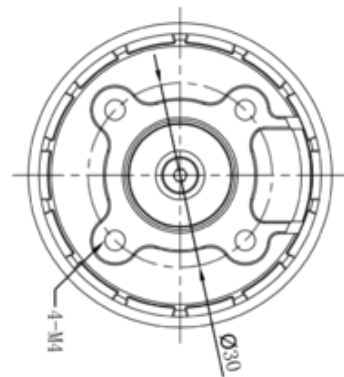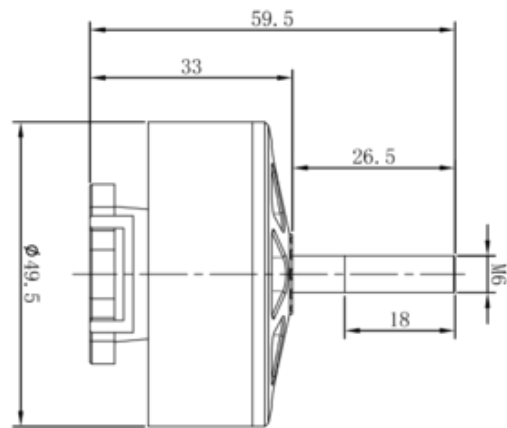


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TM4214	380KV	5~8S	1080W	36A	182g	Φ49.5x33	58mΩ	M6
TM4214	510KV	5~8S	1908W	63.6A	182g	Φ49.5x33	40mΩ	M6

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

云台电机

GIMBAL BRUSHLESS MOTOR

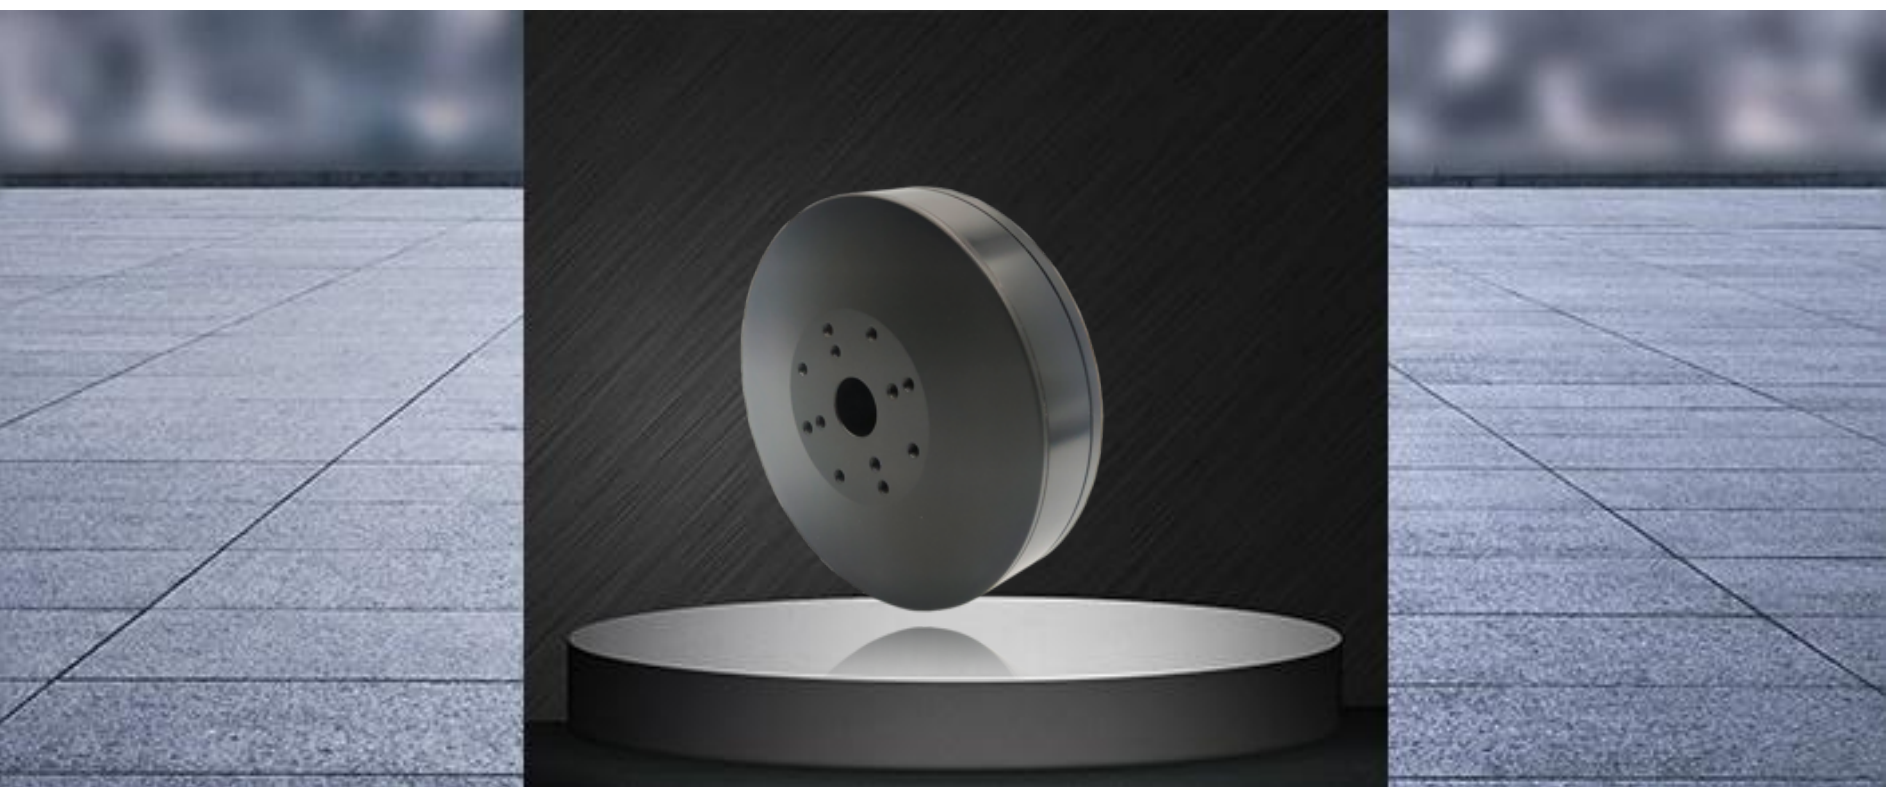


云台电机属于小功率微型精密伺服电机，主要结构由定子和转子组合而成。云台电机也称为精密云台电机，具有抗干扰、抗过载、大力矩等优势。


Gimbal brushless motor belongs to a small power micro precision servo motor, and its main structure is composed of a combination of stator and rotor. Pan tilt motor, also known as precision pan tilt motor, has advantages such as anti-interference, overload resistance, and strong torque.

命名规则

Motor Number Information

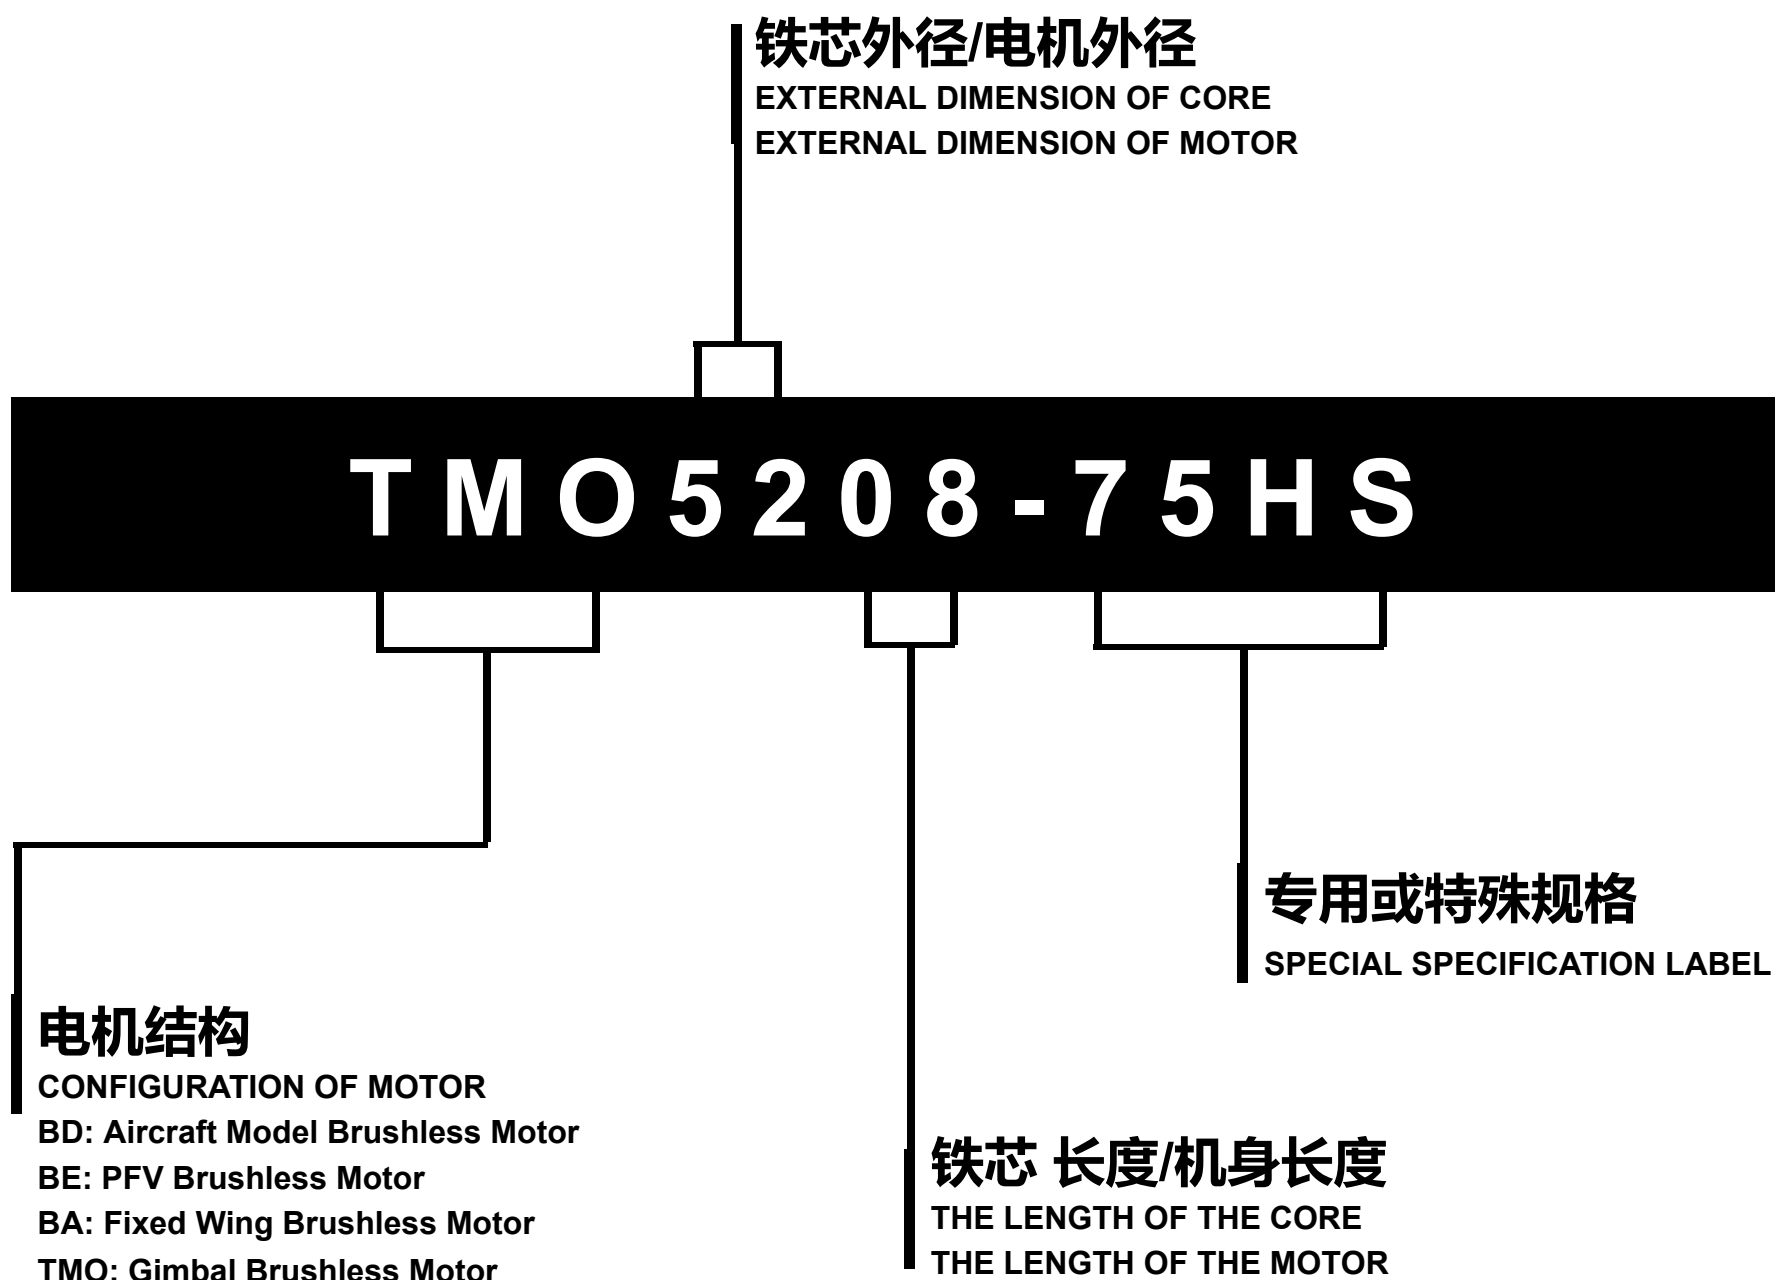

TMO2208-70T

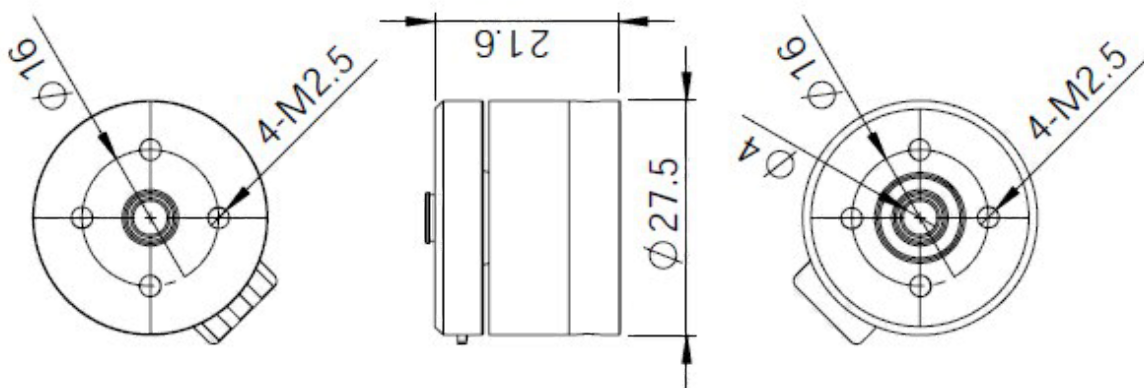


型号 MODEL	圈数 Turns	铜线 Wire (mm)	适用相机 Camrea Range	级数 Poles	槽数 Slots	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	扭力 Torque (g/5v)	马达尺寸 Motor Size (mm)
TMO2208-70T	70	0.15	Gopro	14	12	Φ4.0	40	15.0	230	Φ28x22

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO2606-90T

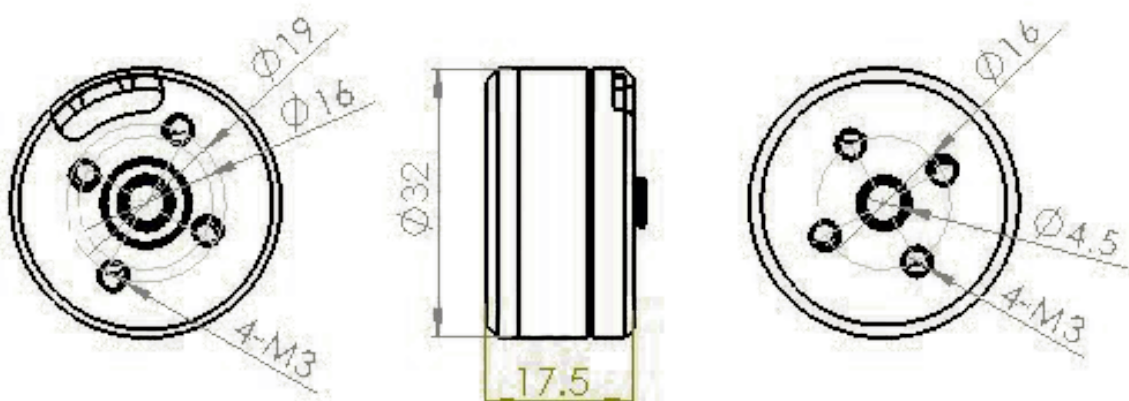


型号 MODEL	圈数 Turns	铜线 Wire (mm)	适用相机 Camrea Range	级数 Poles	槽数 Slots	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	扭力 Torque (g/5v)	马达尺寸 Motor Size (mm)
TMO2606-90T	90	0.2	Gopro	14	12	Φ4.0	40	8.5	450	Φ32x17.5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO2608-70T

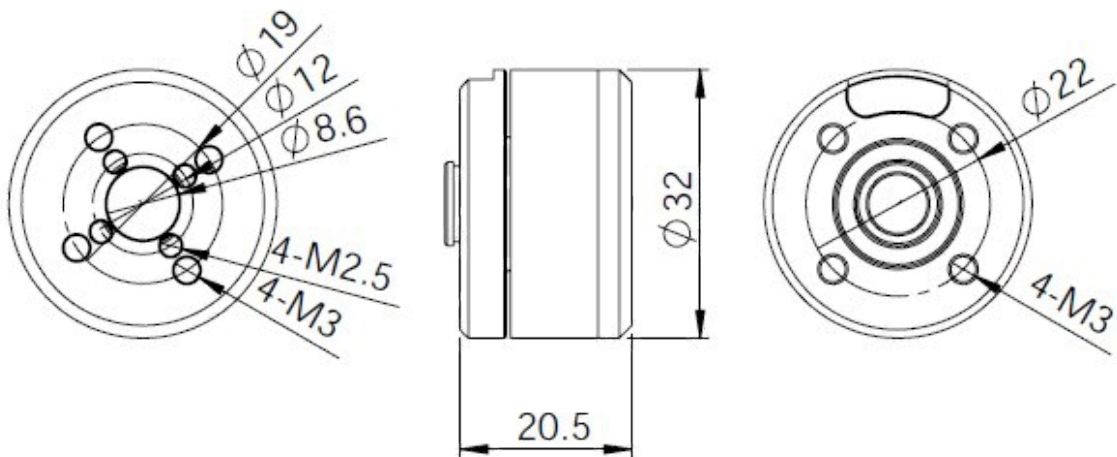


型号 MODEL	圈数 Turns	铜线 Wire (mm)	适用相机 Camrea Range	级数 Poles	槽数 Slots	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	扭力 Torque (g/5v)	马达尺寸 Motor Size (mm)
TMO2608-70T	70	0.15	Gopro	14	12	Φ8.5	40	8.0	930	Φ32x20.5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO2804-100T

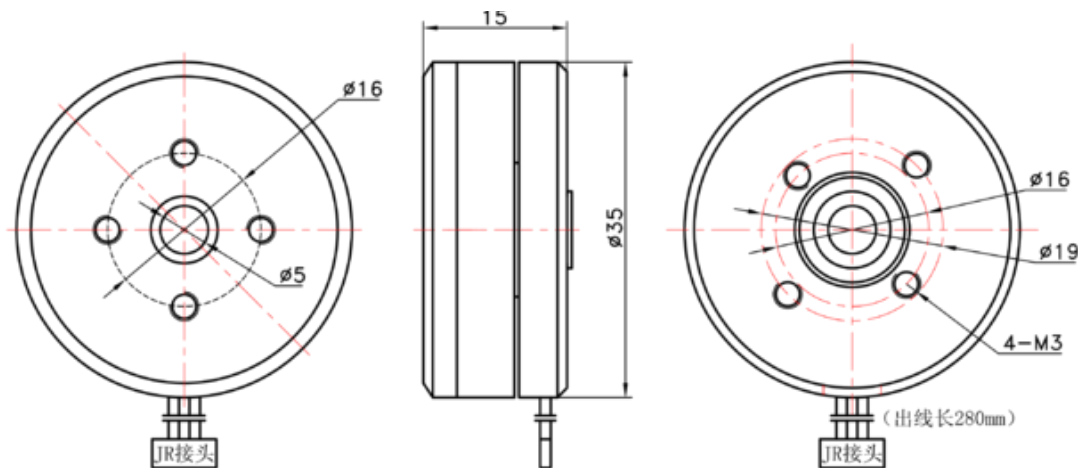


型号 MODEL	圈数 Turns	KV值 RPM/KV	电压 Voltage	最大电流 Max Current(A)	构造 construction	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	堵转扭矩 (N.M)	马达尺寸 Motor Size (mm)
TMO2804-100T	100	147	2~4S	5	12N14P	Φ5.0	40.8	11.2	0.065/3S	Φ35x15

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO3506

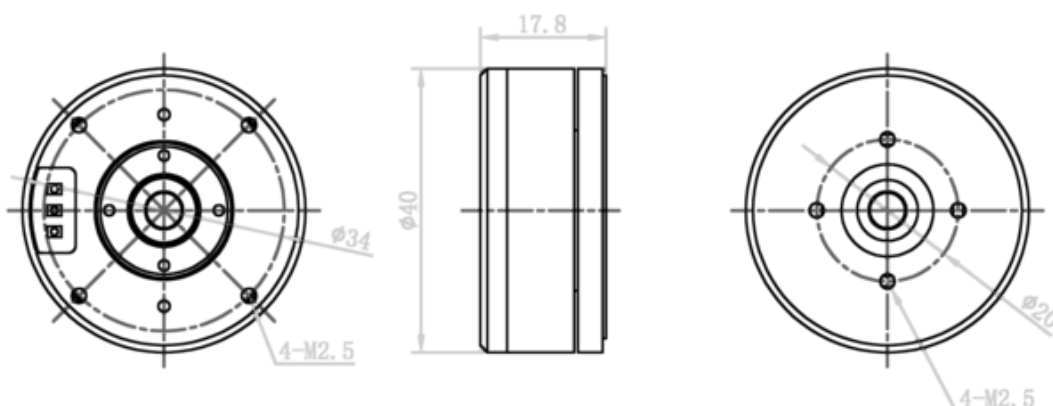


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TMO3506	125KV	12V	2.55W	0.22A	75g	Φ40x17.8	5.65	Φ5.2

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO4005-60T



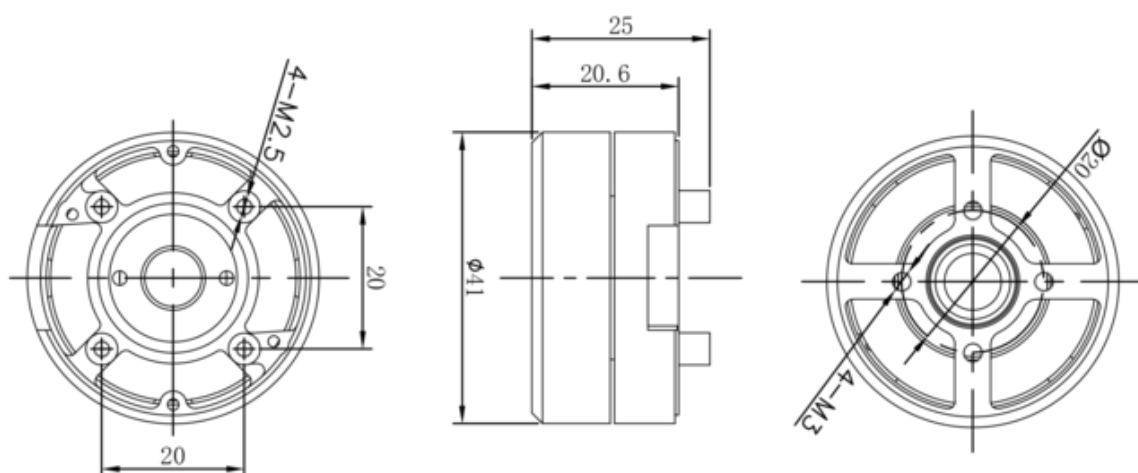


型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴径 ShaftΦ
TMO4005-60T	220KV	14.8V	4.7W	0.32A	48.5g	Φ41x25	4.35	Φ15

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO4014-75T


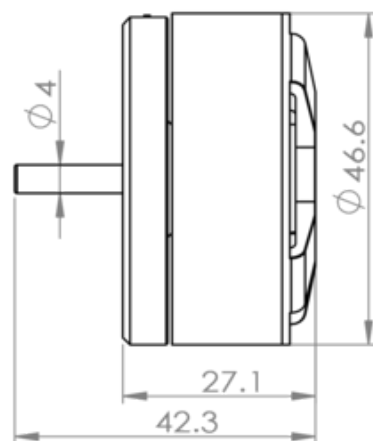
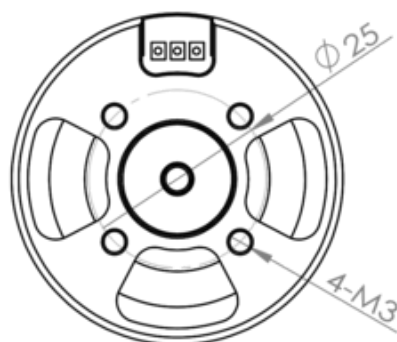


型号 MODEL	圈数 Turns	KV值 RPM/KV	电压 Voltage	最大电流 Max Current(A)	构造 construction	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	扭力 Torque (g/5V)	马达尺寸 Motor Size (mm)
TMO4014-75T	75	25KV	18V	0.1A	12N14P	Φ5	160	5.5	2510	Φ46.8x42.6

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO4108-120T

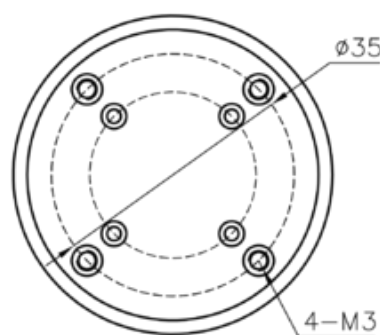
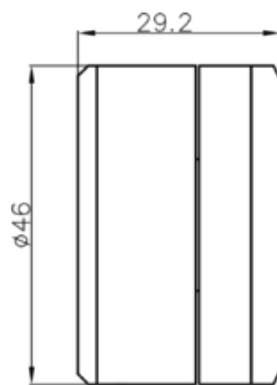
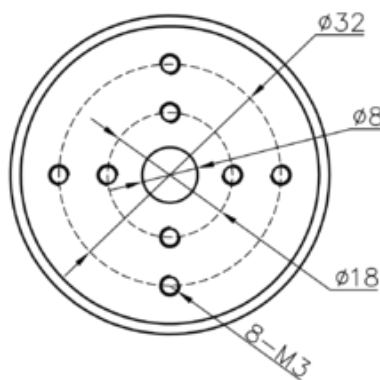


型号 MODEL	圈数 Turns	KV值 RPM/KV	电压 Voltage	最大电流 Max Current(A)	构造 construction	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	堵转扭矩 (N.M)	马达尺寸 Motor Size (mm)
TMO4108-120T	120	56	3~6S	8	24N22P	Φ8.0	93	15.5	0.235/3S	Φ46x29

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO4114-100T

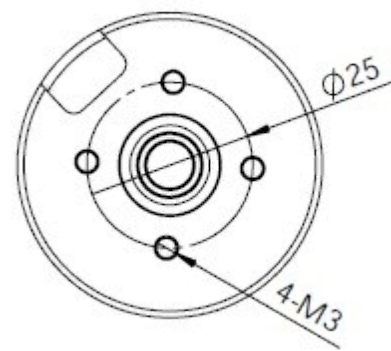
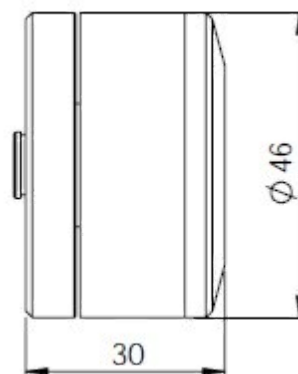
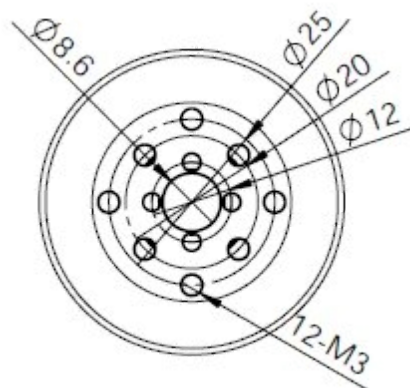


型号 MODEL	圈数 Turns	电压 Voltage	适用相机 Camrea Range	级数 Poles	槽数 Slots	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	扭力 Torque (g/5v)	马达尺寸 Motor Size (mm)
TMO4114-100T	100	3~5S	NEX	22	24	Φ8.5	136	15.0	1000	Φ46x30

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO4114-120T

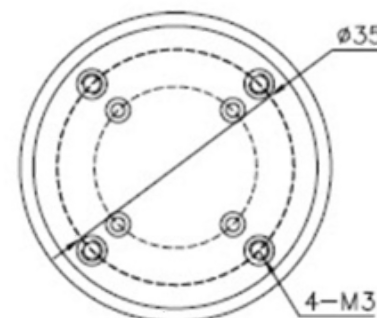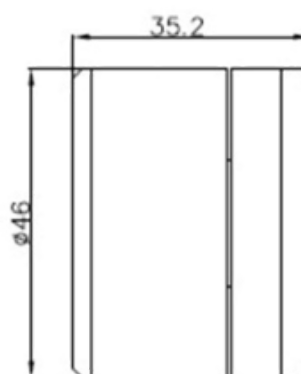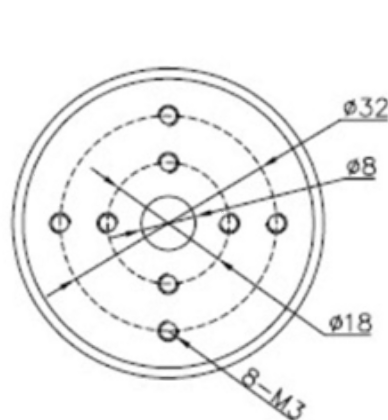


型号 MODEL	圈数 Turns	铜线 Wire (mm)	适用相机 Camrea Range	级数 Poles	槽数 Slots	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	扭力 Torque (g/5v)	马达尺寸 Motor Size (mm)
TMO4114-120T	120	0.17	800G	22	24	Φ8.0	154	16.5	2120	Φ46x35.2

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO5012-150


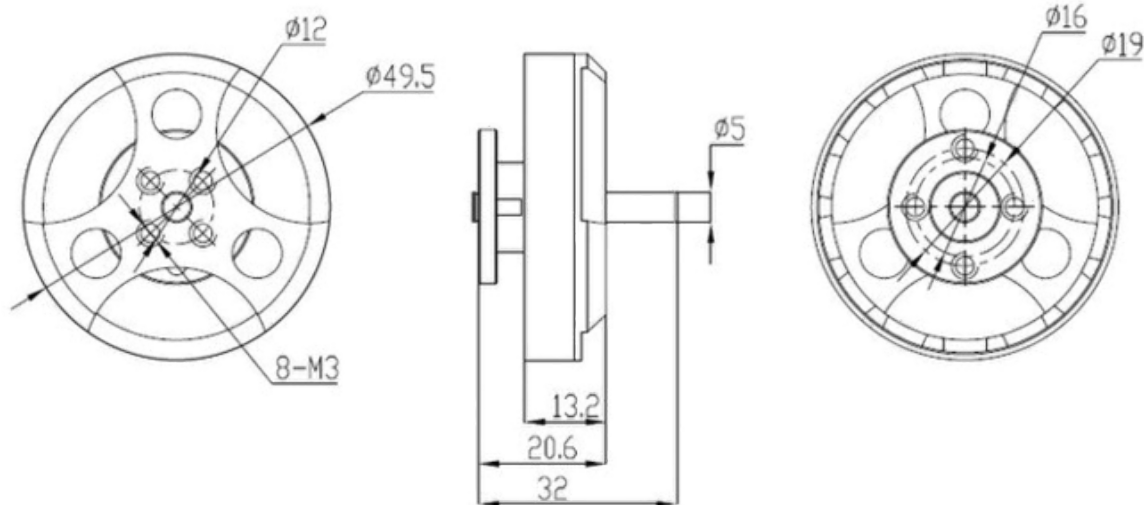


型号 MODEL	圈数 Turns	铜线 Wire (mm)	适用相机 Camrea Range	级数 Poles	槽数 Slots	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	扭力 Torque (g/5v)	马达尺寸 Motor Size (mm)
TMO5012-150	150	0.21	700G	14	12	Φ4.0	71	14.2	670	Φ49.5x20.6

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

HHZ5208-75T


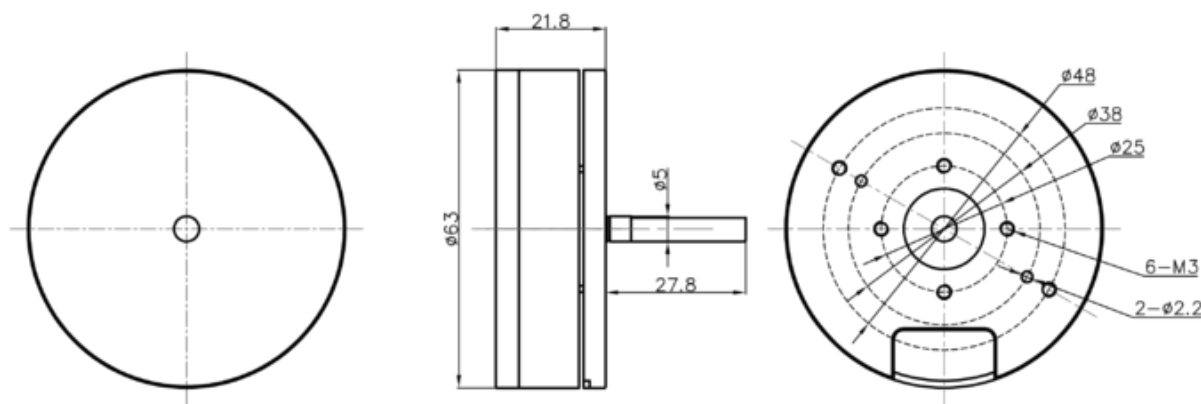



型号 MODEL	KV值 RPM/KV	电压 Voltage	最大功率 MAX watt(W)	最大电流 MAX CURRENT(A)	重量 Weight(g)	马达尺寸 Motor Size (mm)	电阻 RI(Ω)	轴经 ShaftΦ
HHZ5208-75T	65KV	30V	2.79W	0.1A	206.3	Φ63x21.8	6.4	Φ5.0

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO5208-200H

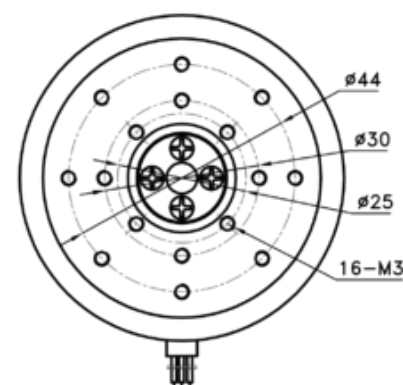
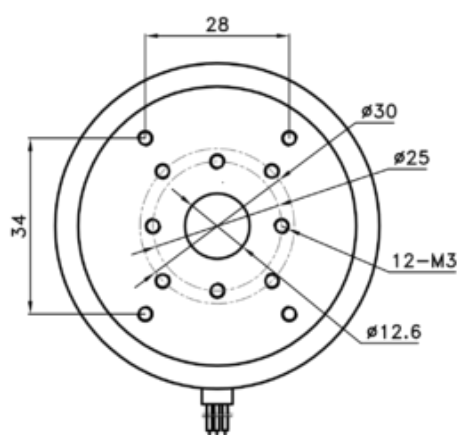



型号 MODEL	圈数 Turns	KV值 RPM/KV	电压 Voltage	最大电流 Max Current(A)	构造 construction	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	堵转扭矩 (N.M)	马达尺寸 Motor Size (mm)
TMO5208-200H	200	25	3~6S	10	12N14P	Φ12.6	196	15.5	0.368/3S	Φ63x24.5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO5208S

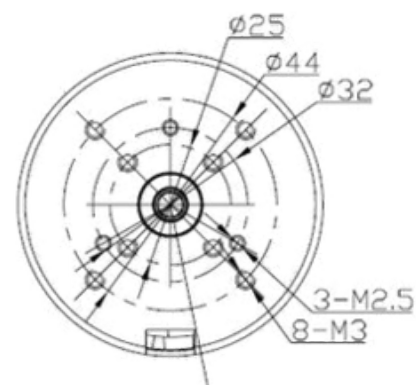
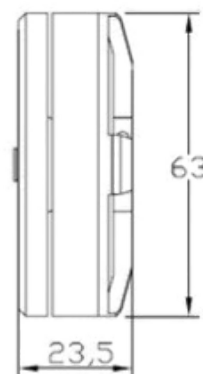
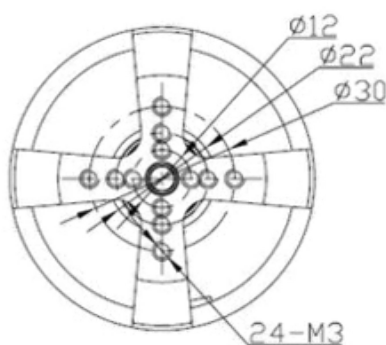


型号 MODEL	圈数 Turns	铜线 Wire (mm)	适用相机 Camrea Range	级数 Poles	槽数 Slots	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	扭力 Torque (g/5v)	马达尺寸 Motor Size (mm)
TMO5208S-75	75	0.22	DSLR	22	24	Φ7.0	189	15.0	1950	Φ63x23.5
TMO5208S-200	200	0.27	DSLR	22	24	Φ7.0	178	17.2	1510	Φ63x23.5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO5208B

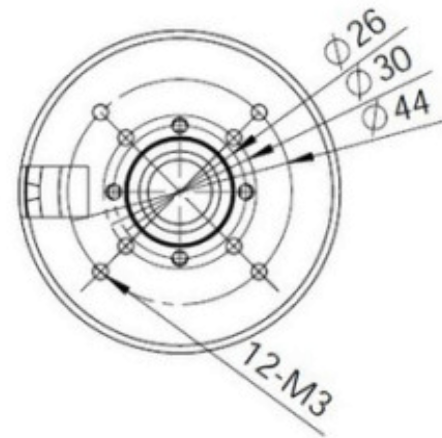
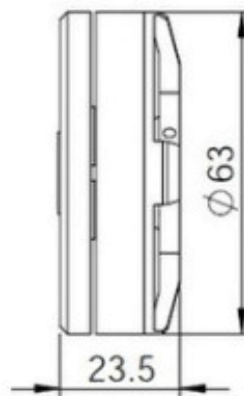
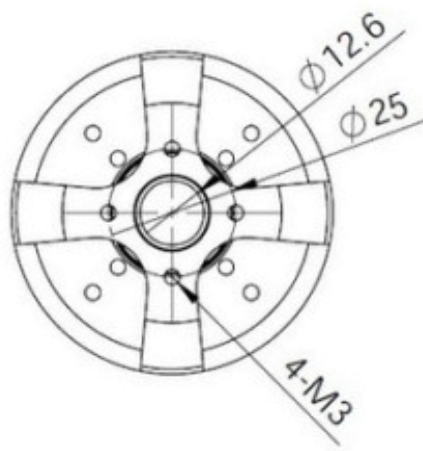


型号 MODEL	圈数 Turns	铜线 Wire (mm)	适用相机 Camrea Range	级数 Poles	槽数 Slots	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	扭力 Torque (g/5v)	马达尺寸 Motor Size (mm)
TMO5208B-75	75	0.22	DSLR	22	24	Φ12.0	189	15.0	1950	Φ63x23.5
TMO5208B-200	200	0.27	DSLR	22	24	Φ12.0	185	17.2	1510	Φ63x23.5

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO6208-150T

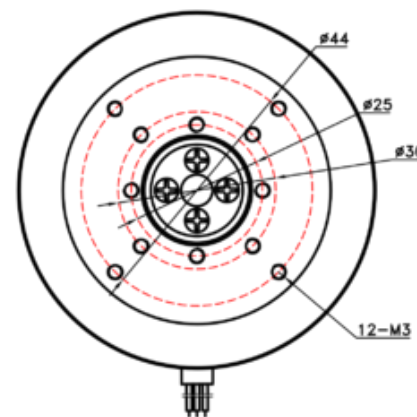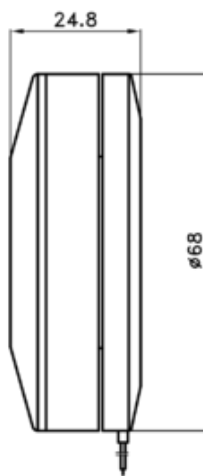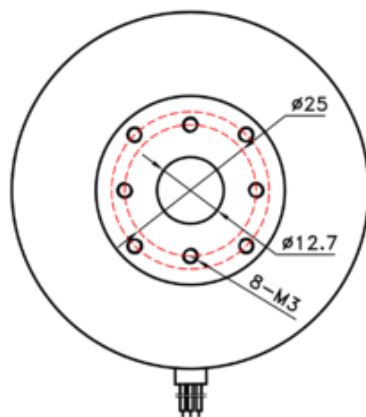


型号 MODEL	圈数 Turns	KV值 RPM/KV	电压 Voltage	最大电流 Max Current(A)	构造 construction	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	堵转扭矩 (N.M)	马达尺寸 Motor Size (mm)
TMO6208-150T	150	25	3~6S	10	24N22P	Φ12.6	192.2	11.5	0.485/3S	Φ68x24.8

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO6212-150T

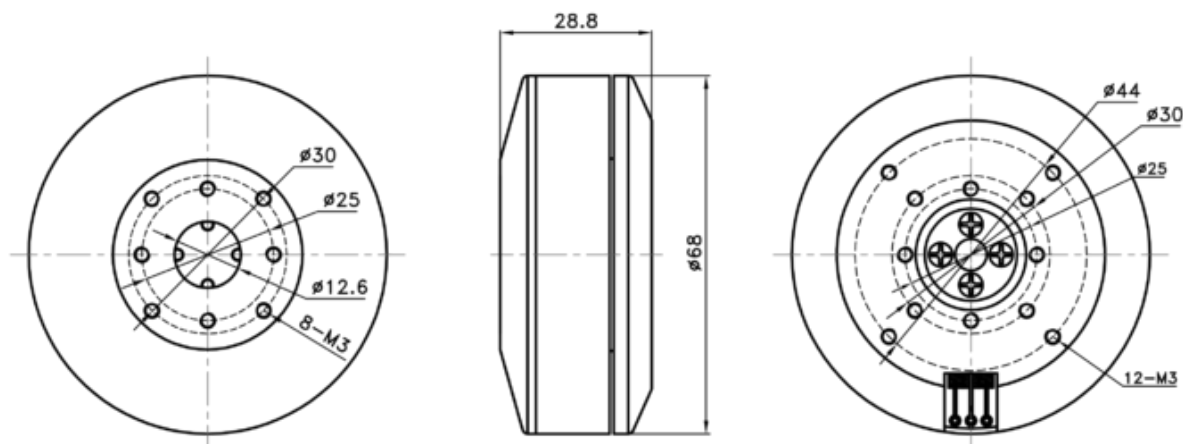


型号 MODEL	圈数 Turns	KV值 RPM/KV	电压 Voltage	最大电流 Max Current(A)	构造 construction	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	堵转扭矩 (N.M)	马达尺寸 Motor Size (mm)
TMO6212-150T	150	19	3~6S	11	24N22P	Φ12.6	248.5	15.2	0.556/3S	Φ68x28.8

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO8008-120T

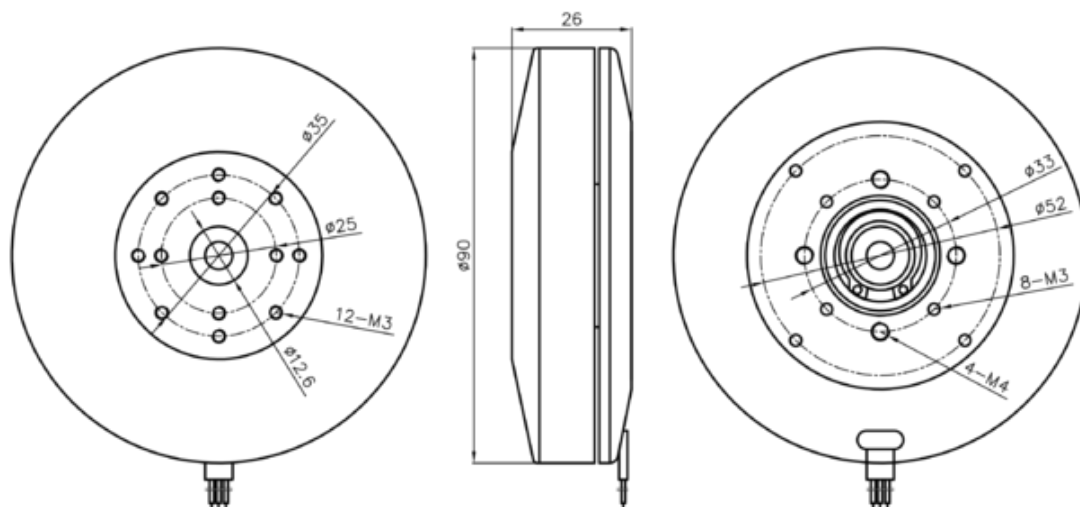


型号 MODEL	圈数 Turns	KV值 RPM/KV	电压 Voltage	最大电流 Max Current(A)	构造 construction	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	堵转扭矩 (N.M)	马达尺寸 Motor Size (mm)
TMO8008-120T	120	11	3~6S	12	24N28P	Φ12.6	342.5	15.2	0.816/3S	Φ90x26

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO8014-120T

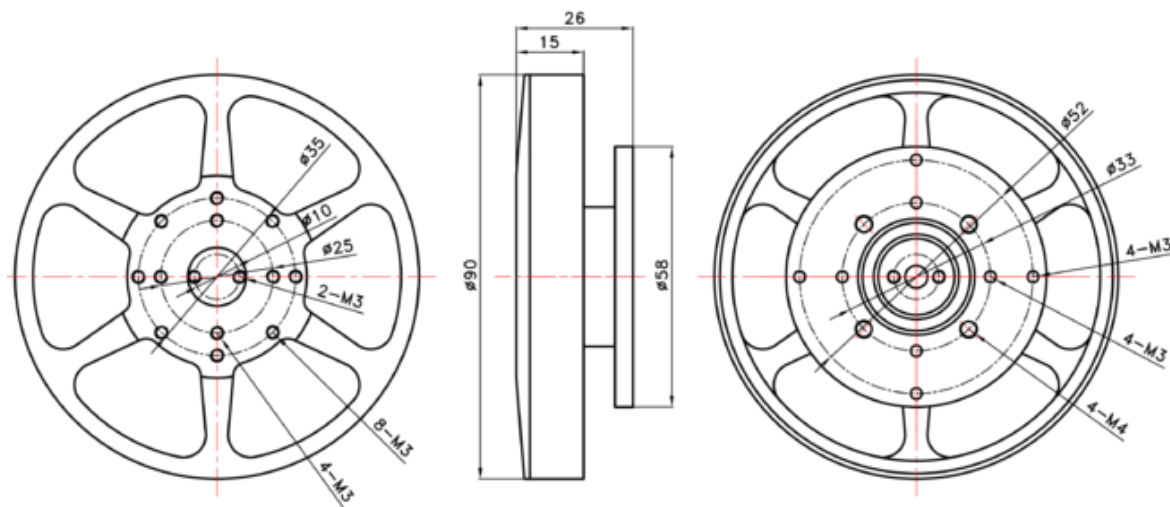


型号 MODEL	圈数 Turns	KV值 RPM/KV	电压 Voltage	最大电流 Max Current(A)	构造 construction	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	堵转扭矩 (N.M)	马达尺寸 Motor Size (mm)
TMO8014-120T	120	11	3~6S	12	24N28P	Φ12.6	310	15.2	0.765/3S	Φ90x26

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO8108-90T




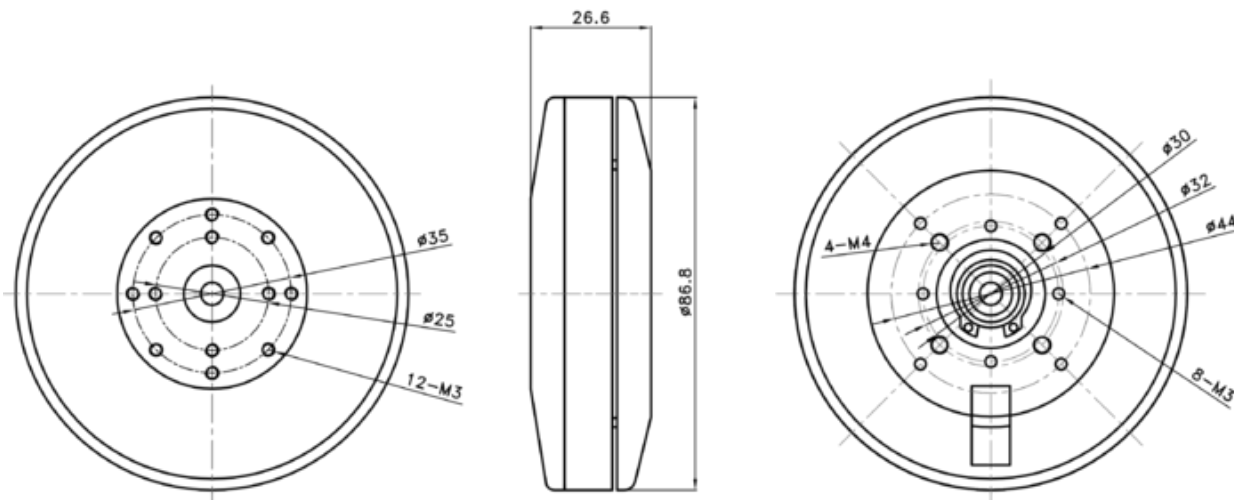


型号 MODEL	圈数 Turns	KV值 RPM/KV	电压 Voltage	最大电流 Max Current(A)	构造 construction	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	堵转扭矩 (N.M)	马达尺寸 Motor Size (mm)
TMO8108-90T	90	17	3~8S	12	36N42P	Φ12.6	263	8.7	0.85/3S	Φ86.8x26.6

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TMO8112-90T

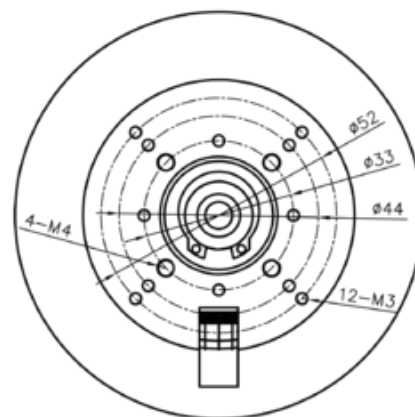
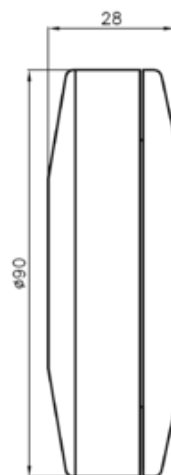
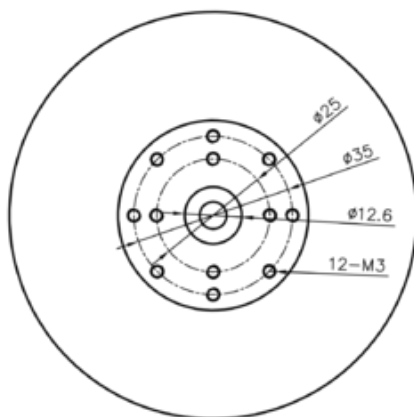



型号 MODEL	圈数 Turns	KV值 RPM/KV	电压 Voltage	最大电流 Max Current(A)	构造 construction	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	堵转扭矩 (N.M)	马达尺寸 Motor Size (mm)
TMO8112-90T	90	11	3~8S	12	36N42P	Φ12.6	385	7.5	1.55/3S	Φ90x28

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.


TMO60-80T

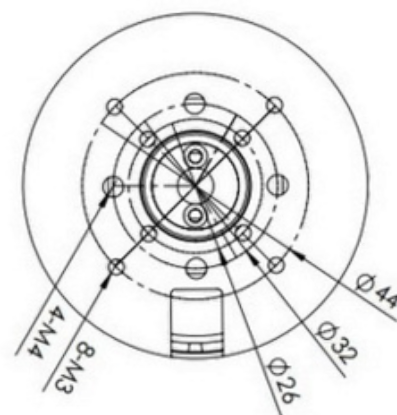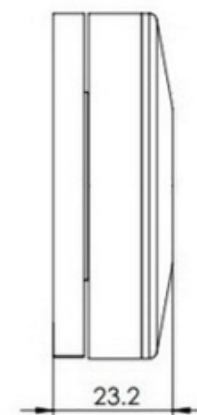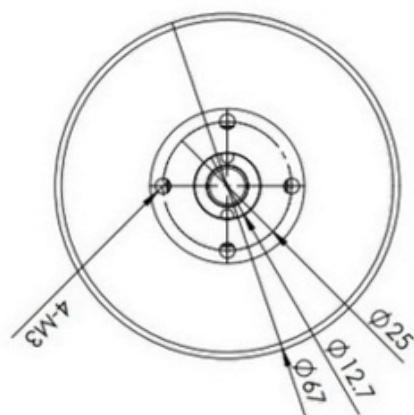

型号 MODEL	圈数 Turns	铜线 Wire (mm)	适用相机 Camrea Range	级数 Poles	槽数 Slots	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	扭力 Torque (g/5v)	马达尺寸 Motor Size (mm)
TMO60-80T	80	0.27	DSLR	22	24	Φ12.0	189	10.0	2200	Φ67x23.2

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。


PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

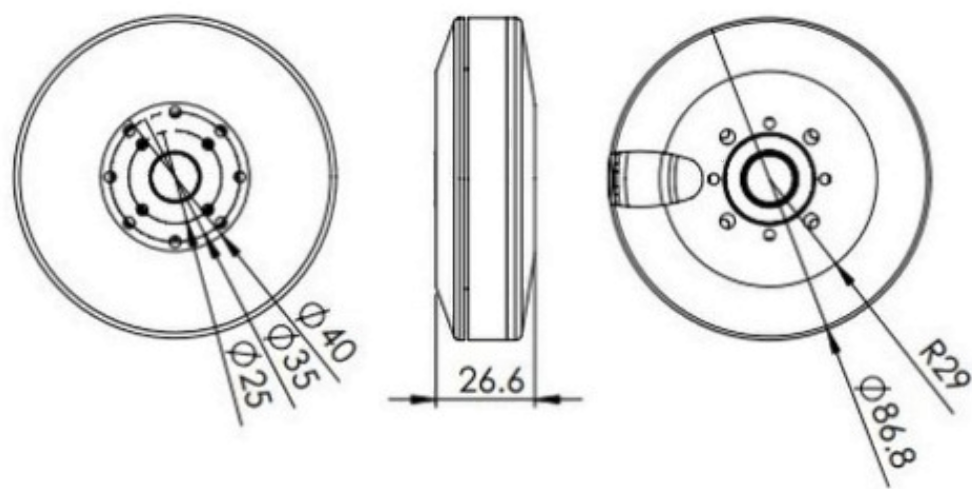

型号 MODEL	圈数 Turns	铜线 Wire (mm)	适用相机 Camrea Range	级数 Poles	槽数 Slots	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	扭力 Torque (g/5v)	马达尺寸 Motor Size (mm)
TMO81-90T	90	0.24	Red Epic	42	36	Φ12.0	270	9.3	4970	Φ86x26.6

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

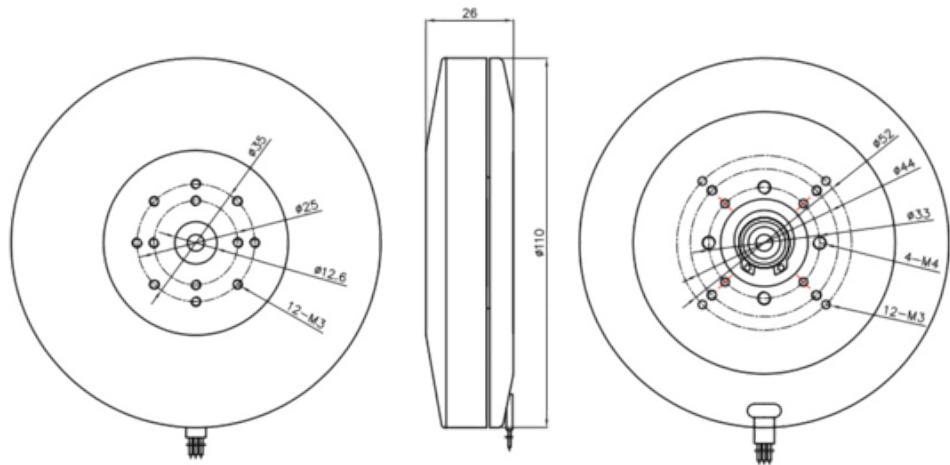

型号 MODEL	圈数 Turns	KV值 RPM/KV	电压 Voltage	最大电流 Max Current(A)	构造 construction	轴经 ShaftΦ	重量 Weight (g)	电阻 RI(Ω)	堵转扭矩 (N.M)	马达尺寸 Motor Size (mm)
TMO1008-150T	150	7	3~8S	13	24N28P	Φ12.6	460	17.5	1.18/3S	Φ110x26

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

筋膜枪电机

FASCIA GUN MOTOR




筋膜枪是利用其内部特制的高速电机来带动“枪头”，产生高频的震动作用到肌肉深层，达到减少局部组织张力、缓解疼痛、促进血液循环等作用。


The fascia gun uses its specially designed high-speed motor to drive the "gun head", generating high-frequency vibrations that act on the deep layers of muscles, reducing local tissue tension, alleviating pain, and promoting blood circulation.

命名规则

Motor Number Information

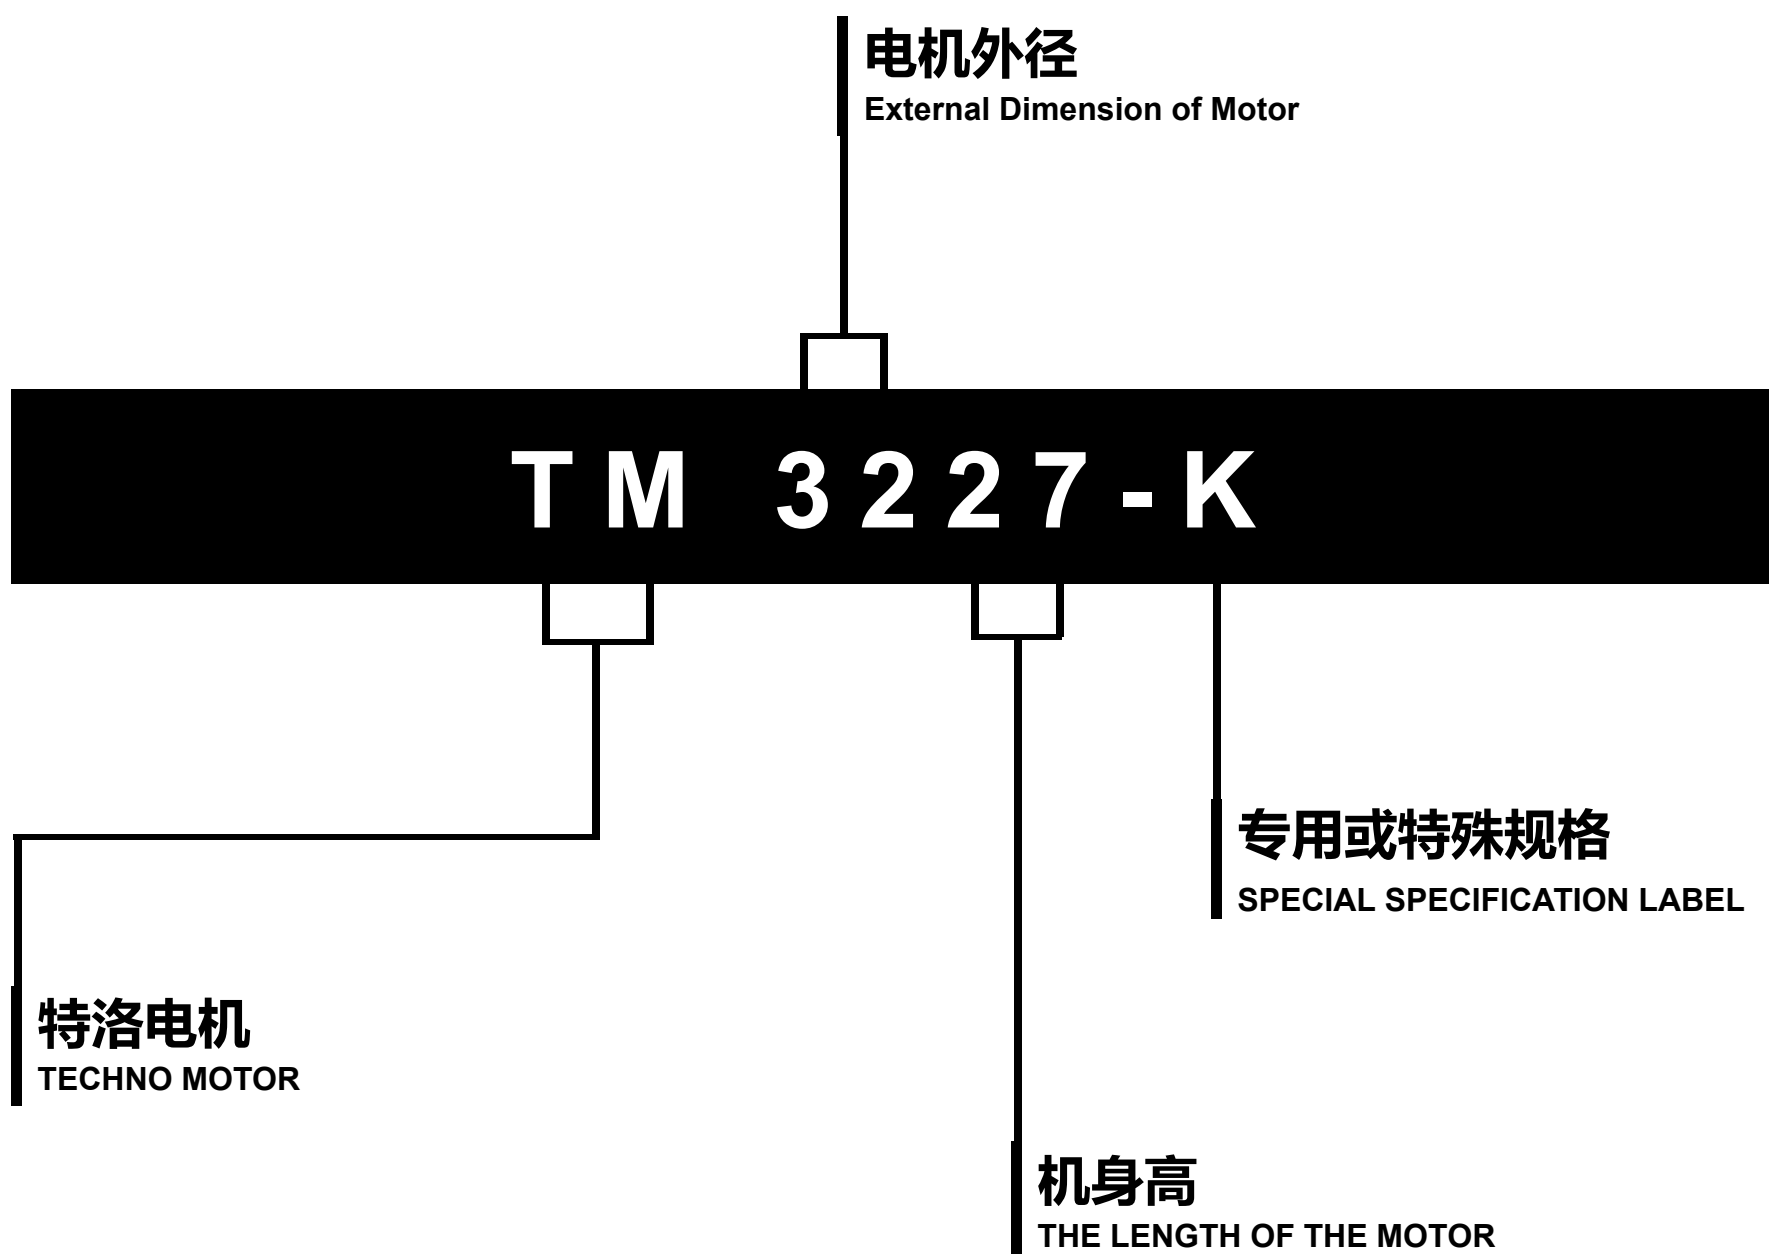

TM3227-M


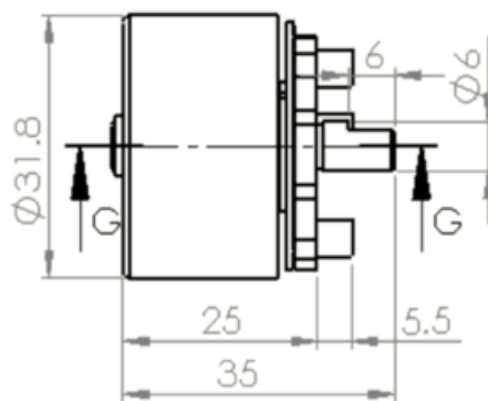


型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		重量 Weight (g)	匝数 Turns	额定功率 Rated Power	电阻 RI(Ω)
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT				
	V	V	r/min	A	G	T	W	Ω
TM3227-M	11.1-12V	12V	3200±15%	≤0.5A	96g±10g	23T	10W	0.35Ω±10%

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM3227-HM


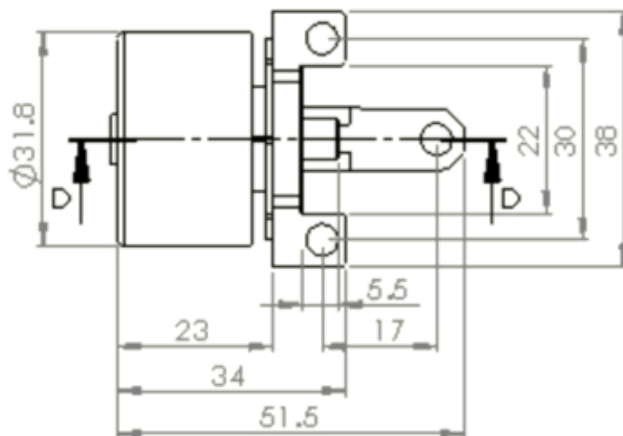


型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		重量 Weight (g)	匝数 Turns	额定功率 Rated Power	电阻 RI(Ω)
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT				
	V	V	r/min	A	G	T	W	Ω
TM3227-HM	7.4V	7.4V	3200±15%	≤0.6A	85g±10g	22T	10W	0.55Ω±10%
TM3227-HM	12V	12V	3200±15%	≤0.8A	85g±10g	26T	10W	0.70Ω±10%

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM3227-K


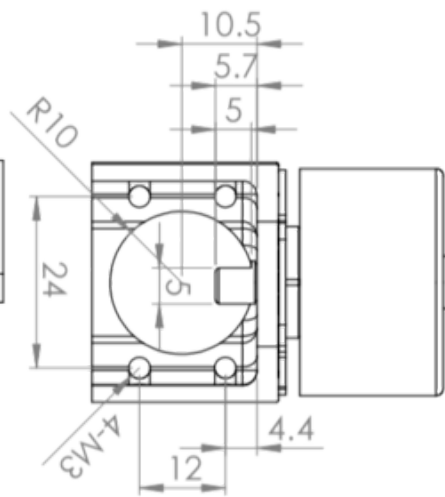
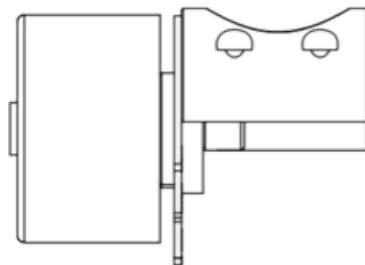


型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		重量 Weight (g)	匝数 Turns	额定功率 Rated Power	电阻 RI(Ω)
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT				
	V	V	r/min	A	G	T	W	Ω
TM3227-K	7.4V	7.4V	3200±15%	≤0.5A	105g±10g	NONE	10W	0.55Ω±10%
TM3227-K	12V	12V	3200±15%	≤0.5A	105g±10g	26T	10W	0.70Ω±10%

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM3227-P

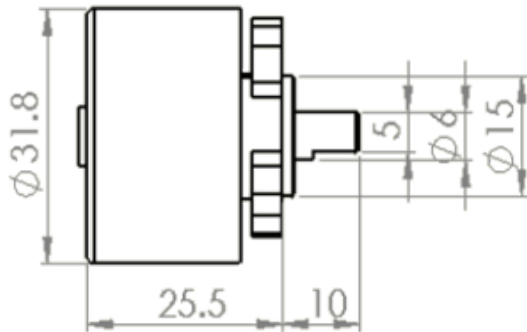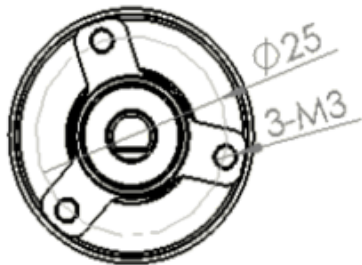


型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		重量 Weight (g)	匝数 Turns	额定功率 Rated Power	电阻 RI(Ω)
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT				
	V	V	r/min	A	G	T	W	Ω
TM3227-P	7.4V	7.4V	3200±15%	≤0.5A	96g±10g	16T	10W	0.45Ω±10%

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM3230-P

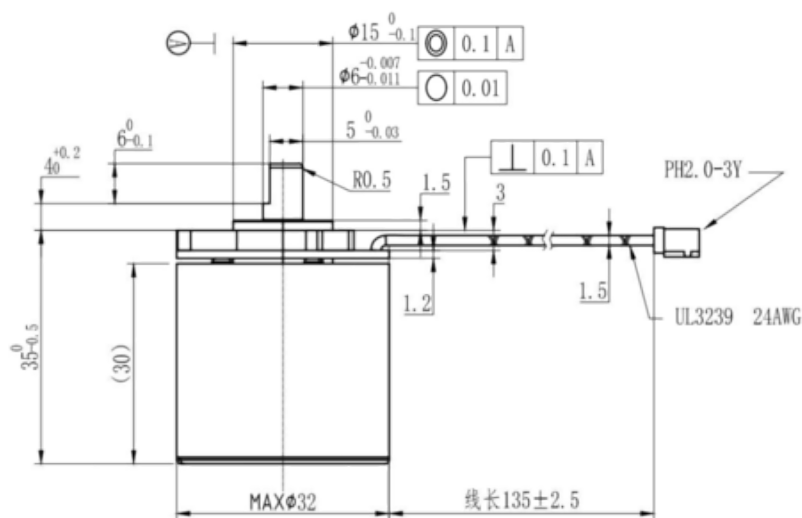


型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		重量 Weight (g)	匝数 Turns	额定功率 Rated Power	电阻 RI(Ω)
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT				
	V	V	r/min	A	G	T	W	Ω
TM3230-P	12V	12V	6200 $\pm$ 10%	$\leq$ 0.6A	113g $\pm$ 10g	23T	100W	0.57 Ω $\pm$ 10%

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.


TM3525

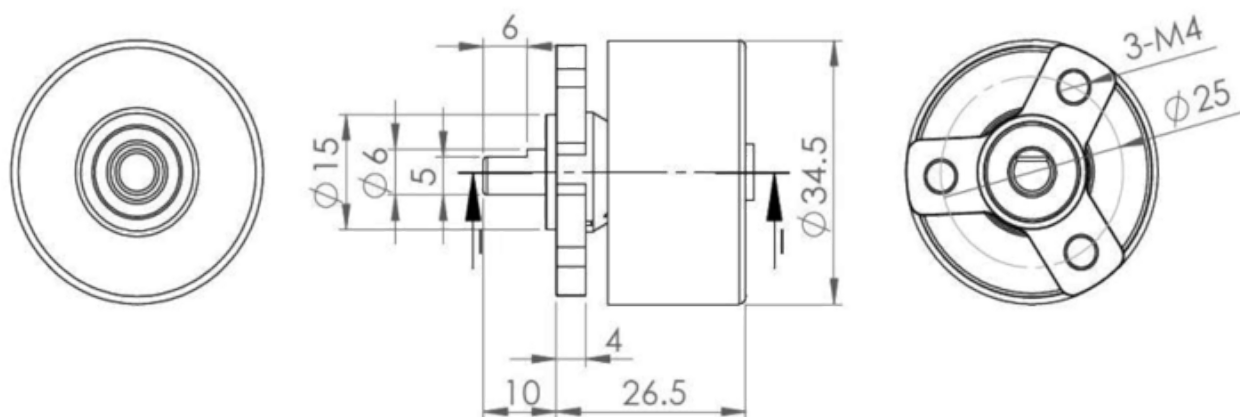

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		重量 Weight (g)	匝数 Turns	额定功率 Rated Power	电阻 RI(Ω)
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT				
	V	V	r/min	A	G	T	W	Ω
TM3525-P	11.1-12V	12V	3200 $\pm$ 15%	$\leq$ 0.5A	95g $\pm$ 10g	22T	10W	0.41 Ω $\pm$ 10%


注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

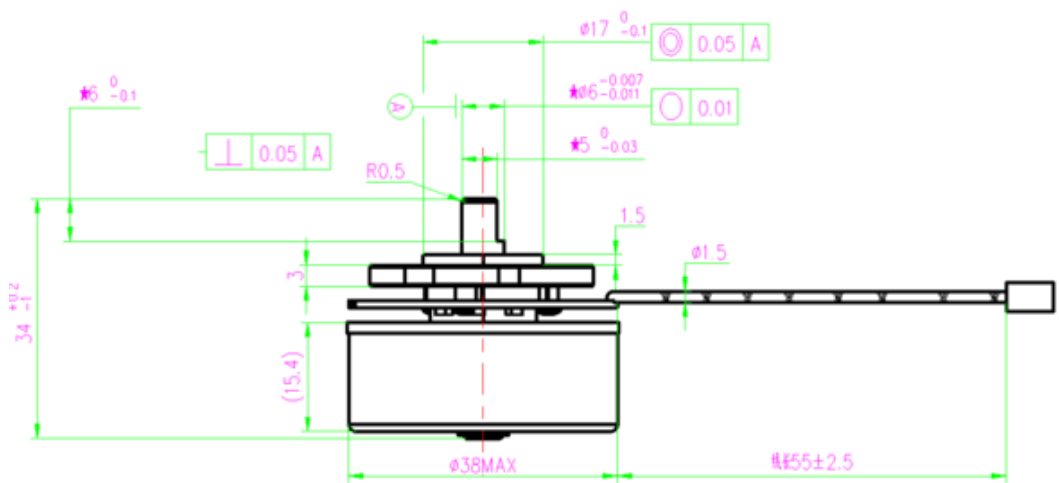

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

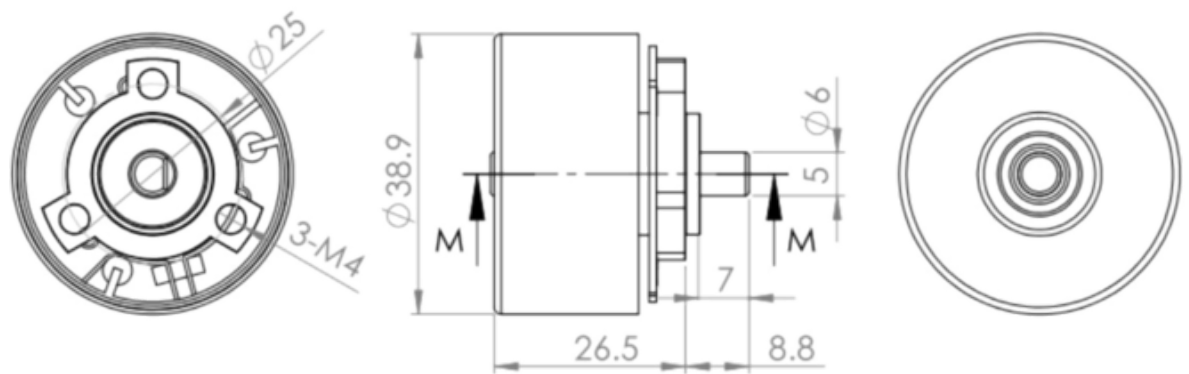

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

电推剪/理发器内转子电机

HAIR CLIPPERS INNER ROTOR MOTOR




电推剪一般由固定推齿、活动推齿、调节手柄、壳体和装在壳体內的电器部件组成，使用时须由电作动力，以交流电的居多。




Hair Clippers are generally composed of fixed push teeth, movable push teeth, adjustment handles, housing, and electrical components installed inside the housing. When used, they must be powered by electricity, with AC power being the majority.

命名规则

Motor Number Information

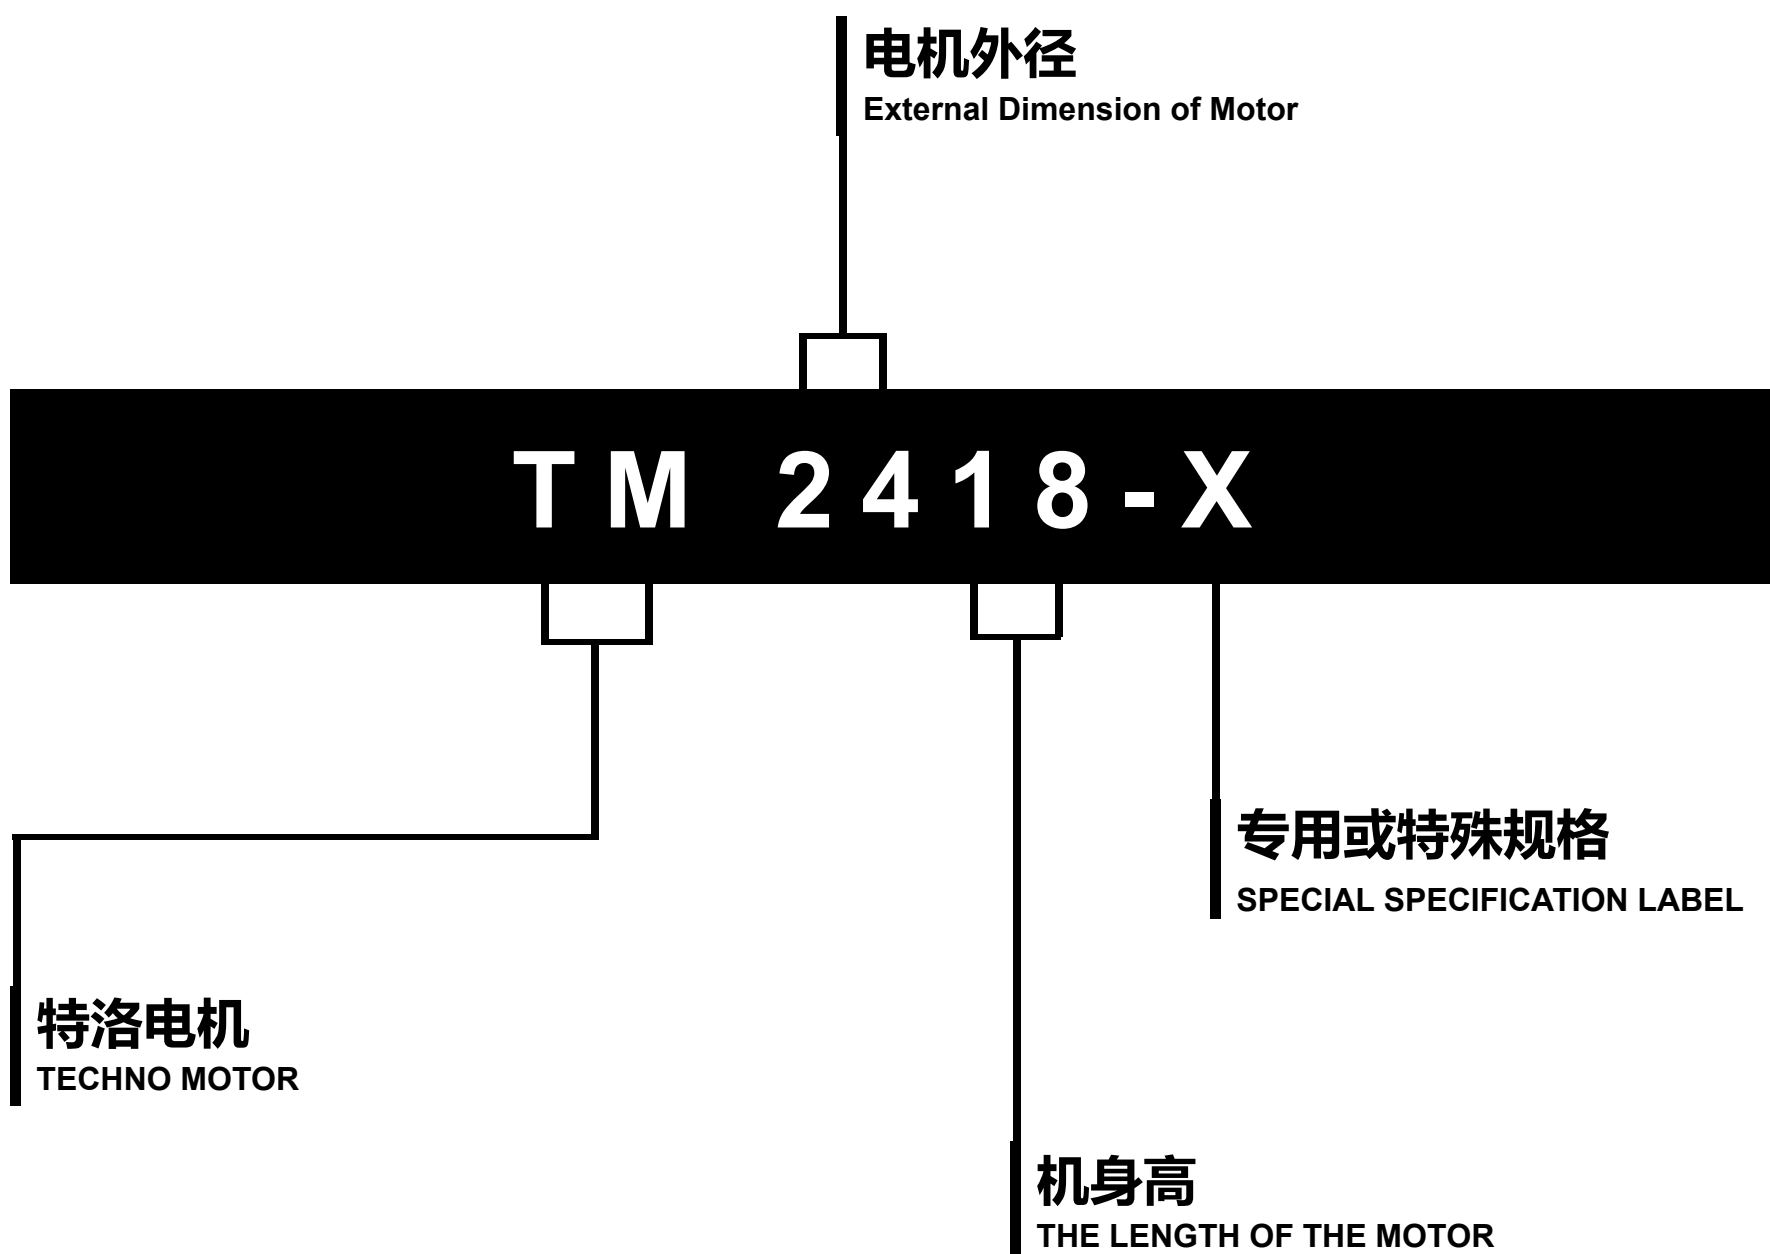

TM2418

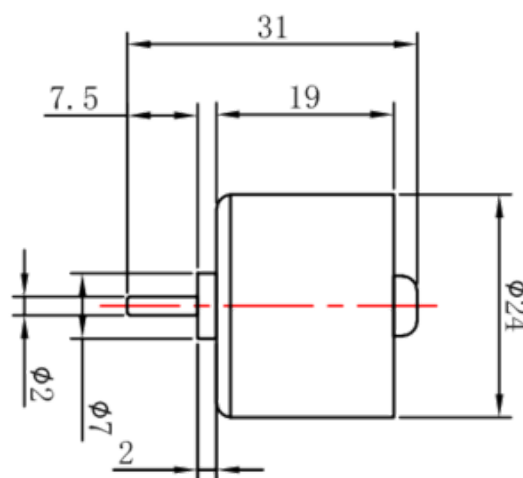


型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		重量 Weight (g)	匝数 Turns	额定功率 Rated Power	电阻 RI(Ω)
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT				
	V	V	r/min	A	G	T	W	Ω
TM2418	3.2-3.7V	3.7V	7200 $\pm$ 15%	$\leq$ 0.55A	30g $\pm$ 5g	15T	5W	0.33 Ω $\pm$ 10%

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM2838

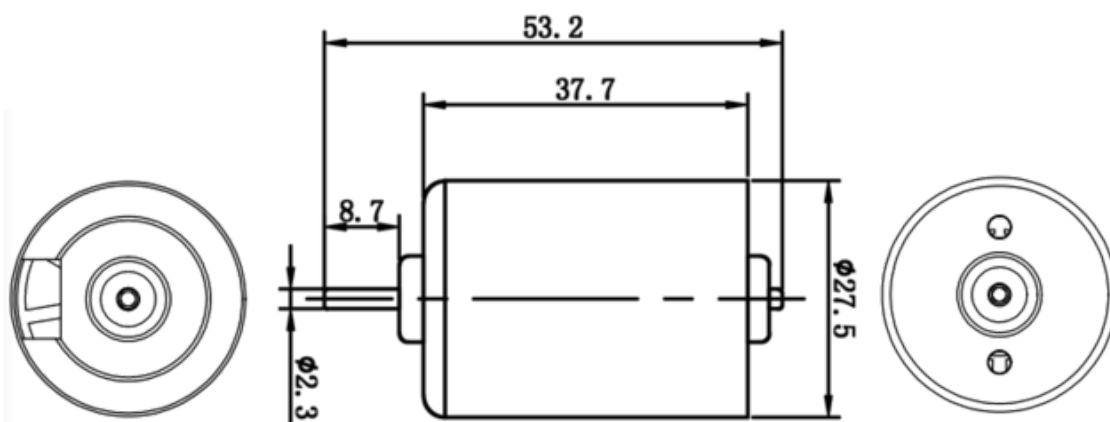


型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		重量 Weight (g)	匝数 Turns	额定功率 Rated Power	电阻 RI(Ω)
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT				
	V	V	r/min	A	G	T	W	Ω
TM2838	3.2-3.7V	3.7V	6300 $\pm$ 15%	$\leq$ 0.4A	70g $\pm$ 10g	11T	1.3W	0.3 Ω $\pm$ 0.6 Ω

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。

PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.


TM2418

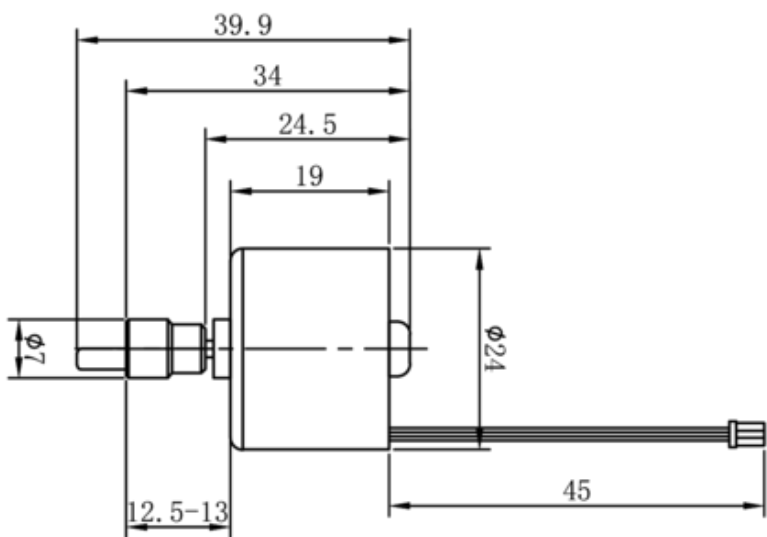

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		重量 Weight (g)	匝数 Turns	额定功率 Rated Power	电阻 RI(Ω)
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT				
	V	V	r/min	A	G	T	W	Ω
TM2418	3.2-3.7V	3.7V	7200±15%	≤0.55A	30g±5g	15T	5W	0.33Ω±10%

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。
PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.

TM2838

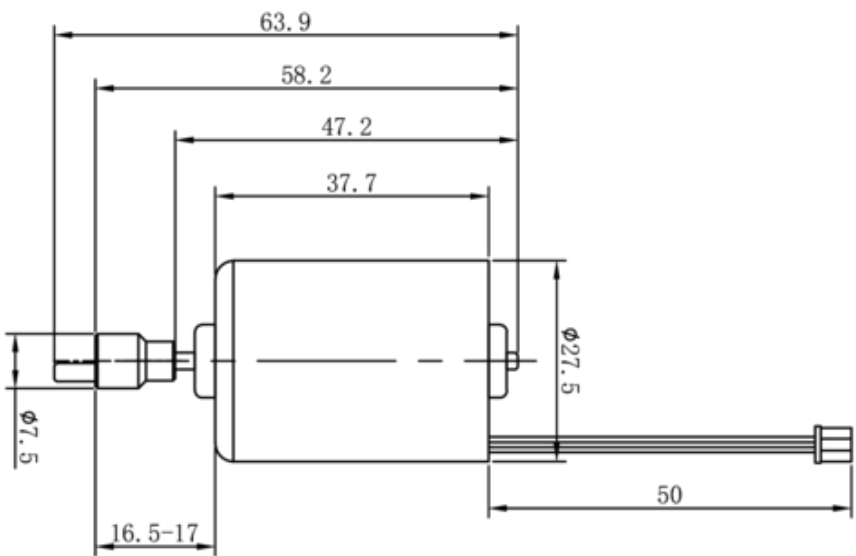

型号 MODEL	电压 VOLTAGE		无负荷 NO LOAD		重量 Weight (g)	匝数 Turns	额定功率 Rated Power	电阻 RI(Ω)
	范围 RANGE	额定值 NOMINAL	转速 SPEED	电流 CURRENT				
	V	V	r/min	A	G	T	W	Ω
TM2838	3.2-3.7V	3.7V	6300±15%	≤0.4A	70g±10g	11T	1.3W	0.3Ω±0.6Ω

注：电机出轴方向性能参数, 颜色可依客户要求做调整, 详情请咨询相关业务人员。
PS: Motor axle direction performance parameters, color can be adjusted according to customer requirements, details please consult relevant sales personnel.



Huizhou Techno Motor Co., Ltd.

Company Address: Room 601, Building 19, Zhongnan Hi-Tech
Information Industry Park, Intersection of Xinhua Avenue and
Industry Second Road, Chenjiang Street, Huicheng District,
Huizhou, Guangdong
TEL: 0752-3320920
FAX: 0752-3320921

惠州特洛电机有限公司

公司地址: 广东省惠州市惠城区陈江街道新华大道与产业二路交汇处中南
高科信息产业园19栋601
TEL: 0752-3320920
FAX: 0752-3320921